


Data transfer to the dveet.io platform

Nikita Ilin


Temperature and humidity sensor

- The DHT11 digital sensor is a composite sensor that provides a calibrated digital signal with temperature and humidity readings.
- The sensor includes a resistive humidity measuring component and a negative temperature coefficient (NTC) temperature measuring component, which are connected to a high-performance 8-bit microcontroller.

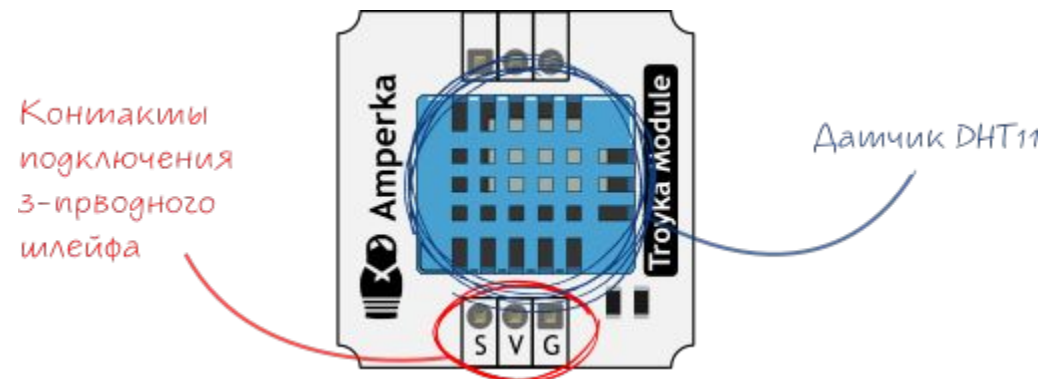


DHT sensor protocol

The sensor output is a digital signal. Temperature and humidity are transmitted over one signal wire (S). DHT11 communicates with a host like Arduino using its own protocol.

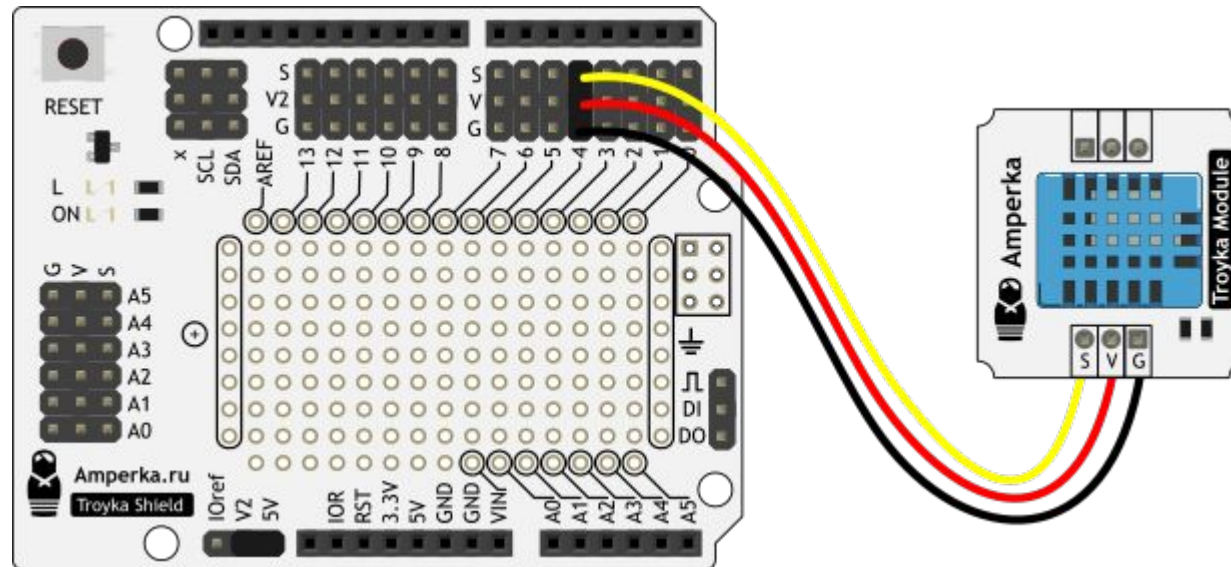

Creating a device for the dweet.io platform

Link: <https://dweet.io/dweet/for/temp?hello=world>

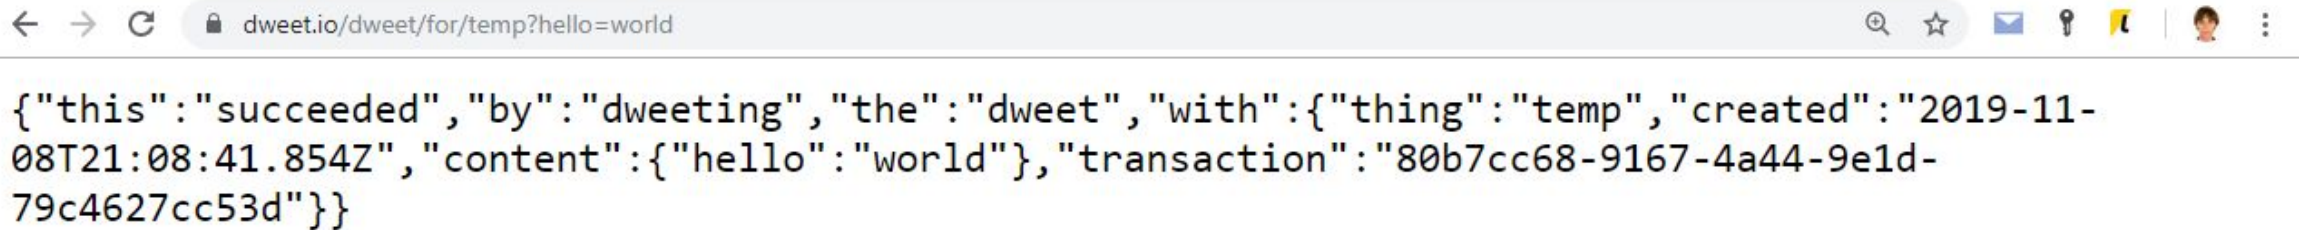

A screenshot of a web browser window. The address bar shows the URL `dweet.io/dweet/for/temp?hello=world`. The page content displays a JSON response: `{"this": "succeeded", "by": "dweeting", "the": "dweet", "with": {"thing": "temp", "created": "2019-11-08T21:08:41.854Z", "content": {"hello": "world"}, "transaction": "80b7cc68-9167-4a44-9e1d-79c4627cc53d"}}`. The browser interface includes navigation buttons (back, forward, refresh), a search icon, a star icon, and a user profile icon.

```
{"this": "succeeded", "by": "dweeting", "the": "dweet", "with": {"thing": "temp", "created": "2019-11-08T21:08:41.854Z", "content": {"hello": "world"}, "transaction": "80b7cc68-9167-4a44-9e1d-79c4627cc53d"}}
```

Creating a control program

- Library for working with the sensor (if it is not installed, it must be added)

#include <TroykaDHT.h>

- Add the pin number to which the sensor is connected:

DHT dht(4, DHT11);

- We start the sensor in the section void setup()

dht.begin();

- Reading data from the sensor in the section void loop()

dht.read();


Creating a control program

- Displaying temperature readings in Celsius, Kelvin and Fahrenheit;
(section void httpRequest())

```
client.println(String ("POST /dweet/for/garden?Light=") + String  
(sensorLight.getLightLux()) + String ("&C=") + String  
(dht.getTemperatureC()) + String ("&K=") + String  
(dht.getTemperatureK()) + String ("&F=") + String  
(dht.getTemperatureF()));
```

Assignment


- Display temperature sensor readings on dweet.io

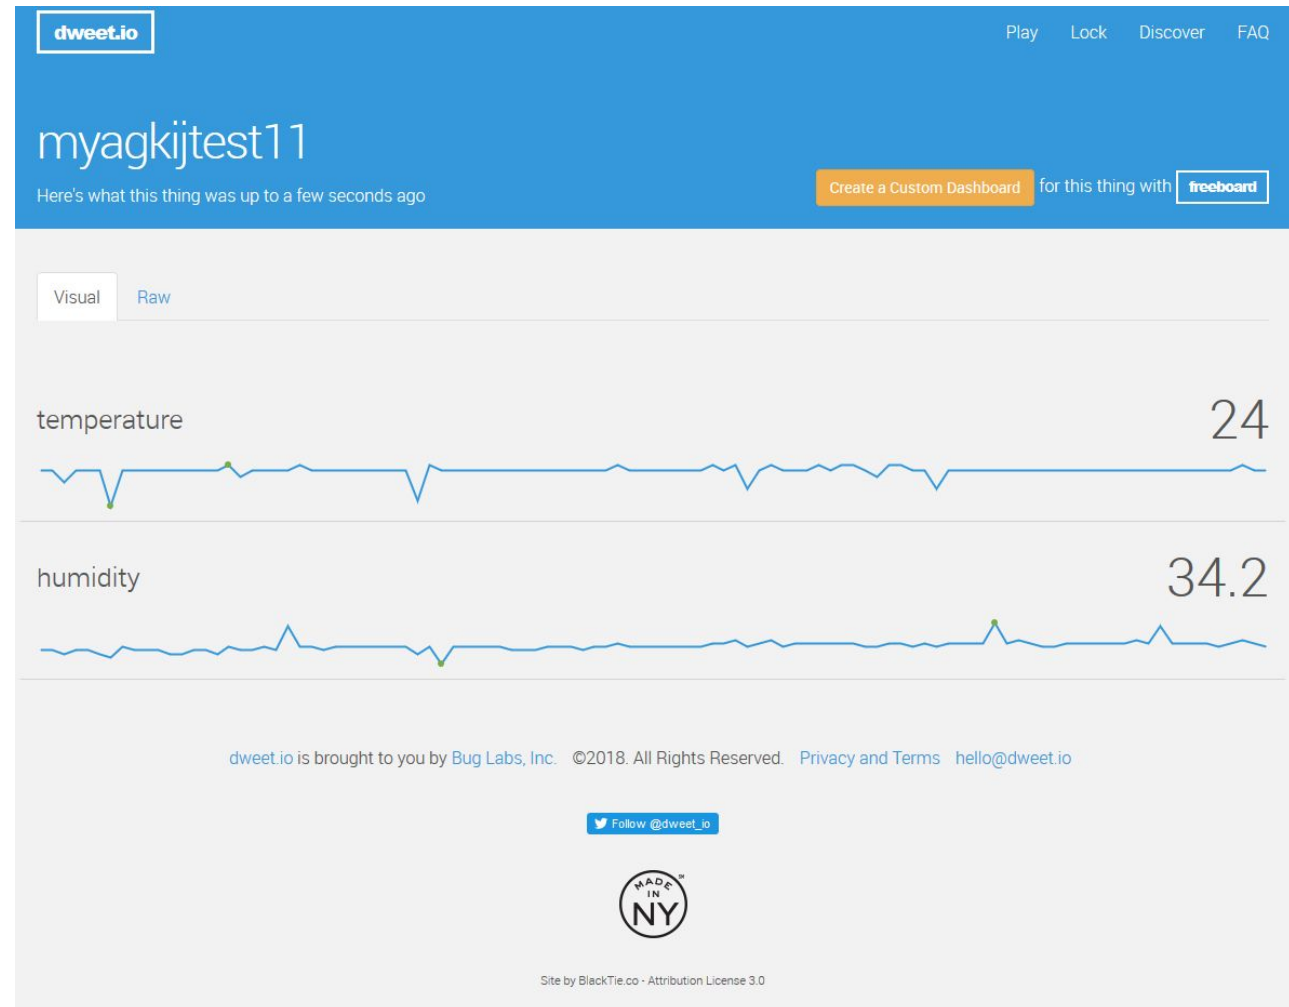

Freeboard interface

1. Go to www.freeboard.io
2. Create account / Login to account
3. On the www.dweet.io website, click the Create a custom dashboard button

Example

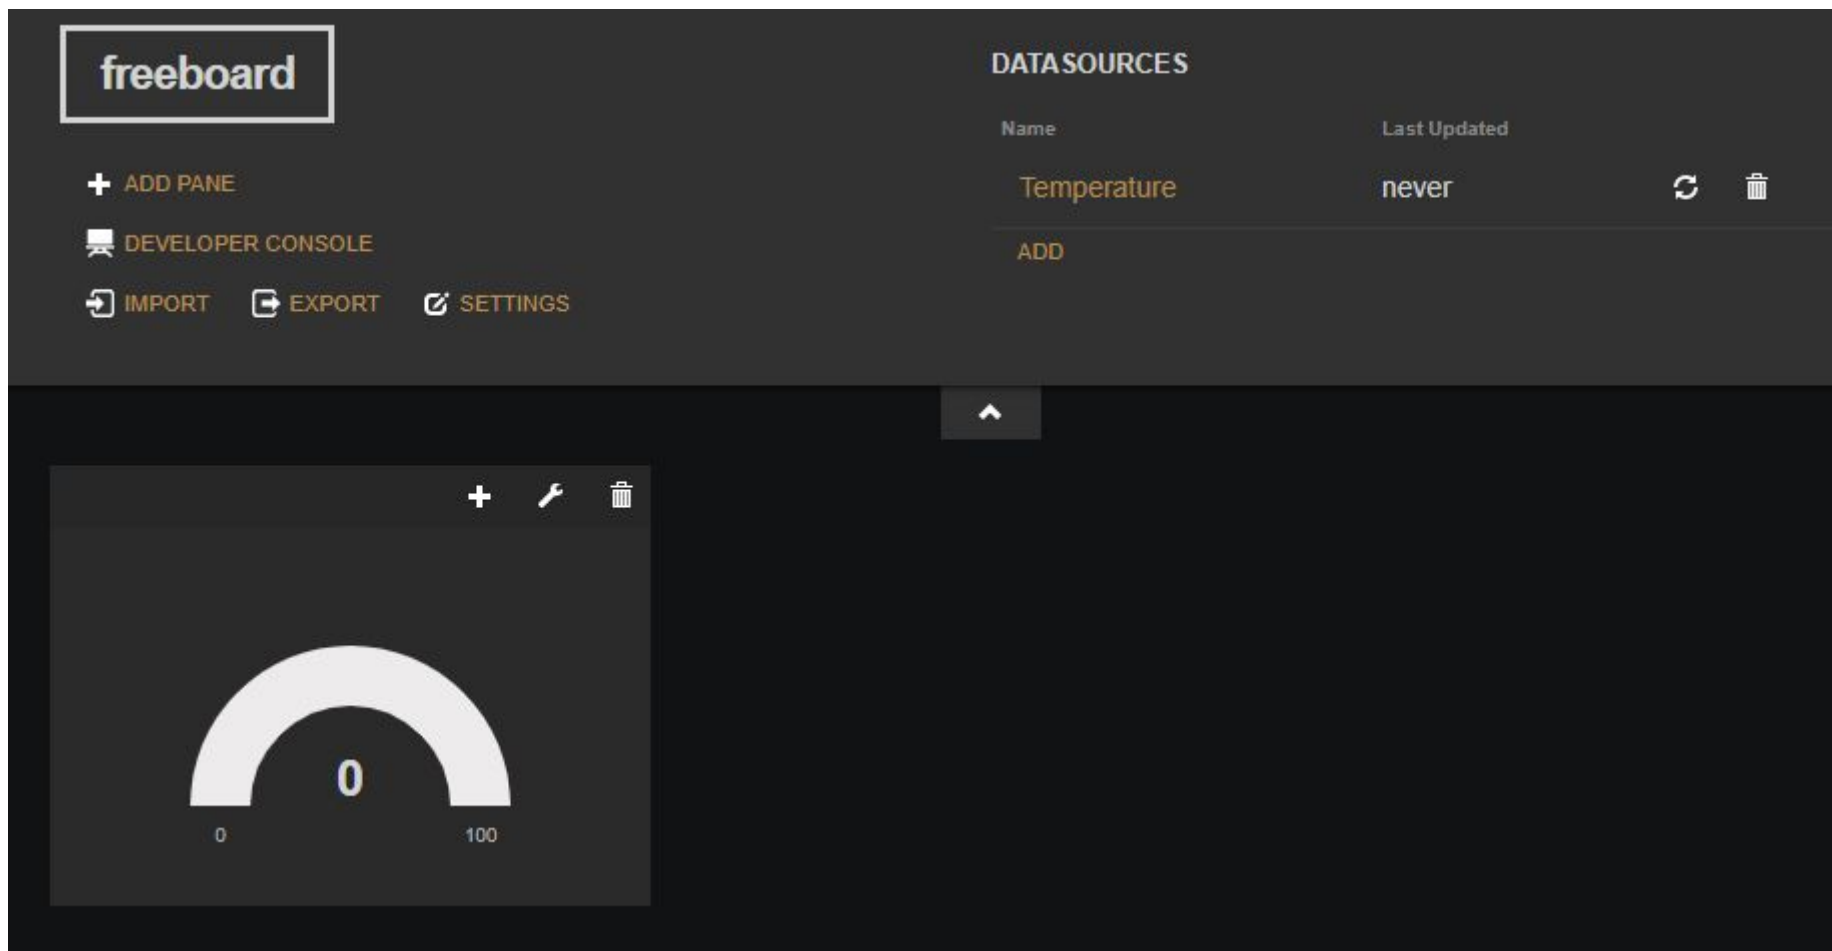

Changing the interface

