

HUIZHOU JIEXIN ELECTRONICS CO.,LTD.



Huizhou Jiexin Electronics Co.,Ltd is a LED lighting supplier and exporter in China, we can supply you T5/T8 tube lights, LED G4&G9, panel lights and hanging lights, and looking forward to cooperating with every possible partner.

www.jeesinled.com E-mail: janetliu@hzjiexin.com.cn

LED HANGING LIGHT

Model No.	Power	Lumen	Size	Input Voltage	Material	Beam Angle	LEDs	CRI	Warranty
JX-T2012C	30W	2200-2400Lm	1200×200×60mm	AC 175-245V 50/60Hz	Aluminum+S urface paint	120°	150pcs SMD 2835	≥70Ra	2 years
JX-T3012C	40W	2800-3000Lm	1200×300×60mm	AC 175-245V 50/60Hz	Aluminum+S urface paint	120°	200pcs SMD 2835	≥70Ra	2 years



Profile specification

Right Angle Slot



Right Angle Flat Edge



Rounded Flat Edge



Focus On Office Lighting

Crystal Silver



Phantom Black



Pearl White



FEATURES:



1, Acrylic Shade


Using high quality acrylic shade, translucent strong, crafted, prominent fashion and art.

2, Paint Ceiling Plate

After high temperature baking process, corrosion resistance, easy to scratch, more durable.



FEATURES:

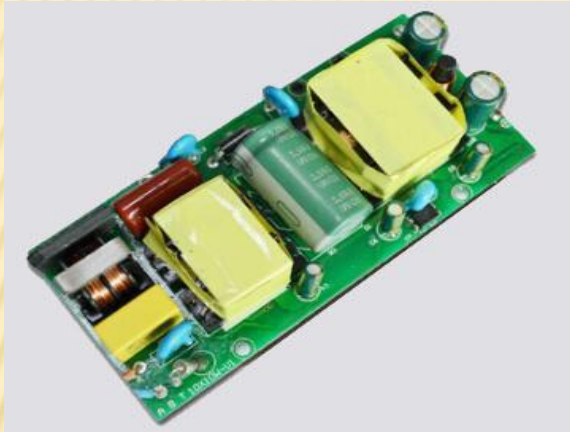

3, LED Driver

All of drivers of conventional products are work by constant current stability, and $PF \geq 0.92$

4, Fittings

Metal cap,
Screws, Iron wire
etc.



APPLICATIONS:



LED hanging lights are mainly suitable for offices, large office buildings, factory workshop, large stores, clothing stores, brand stores, cafes, museums and other commercial lighting, which can wire installation, can be arbitrarily stitching, ceiling installation, simple and convenient, high light efficiency, no dark, simple and elegant.

INSTALLATION INSTRUCTIONS


1, Hanging Type:



- 1, The plastic particles fixed in the ceiling, the ceiling plate with screws fixed to the ceiling, the wire through the ceiling fixed nut.
- 2, Connect the suspension wire to the fixture and tighten the screw.
- 3, Voltage connection with 220V.

INSTALLATION INSTRUCTIONS

2, Ceiling Type

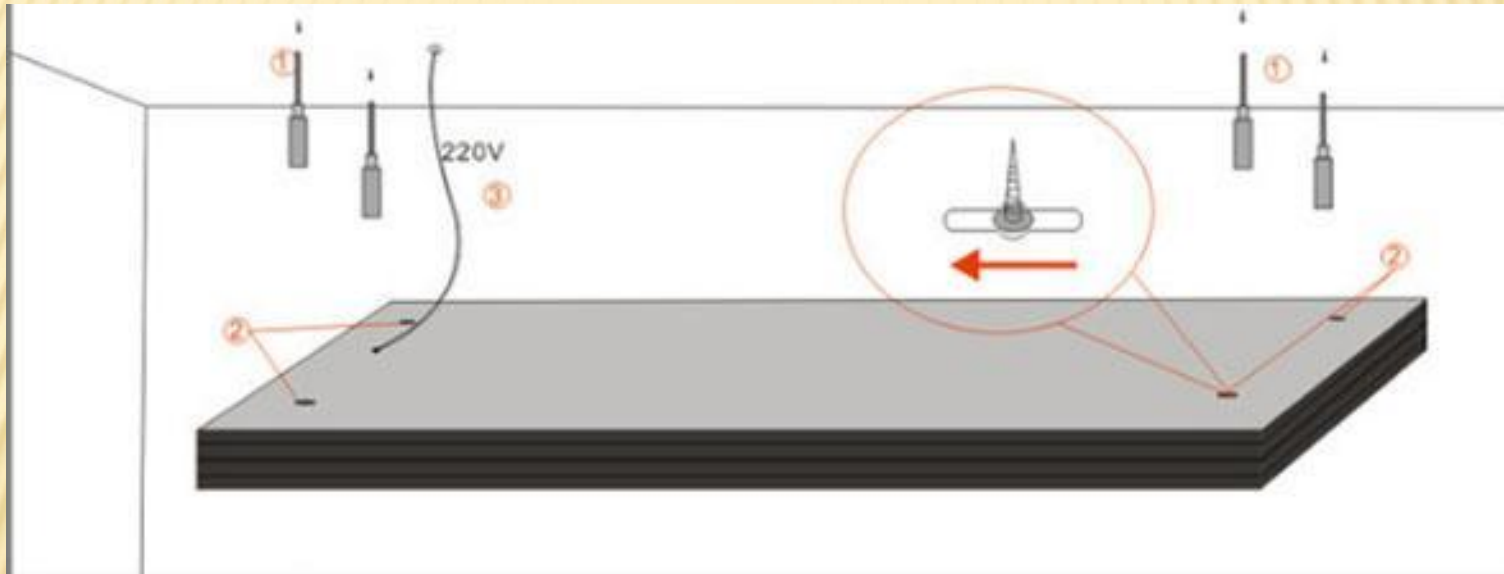

- 1, The plastic is fixed on the ceiling, the screw into the rubber fixed, the nut and the ceiling leave 2mm space;
- 2, Connect with 220V;
- 3, Align the nut at the jack and move it around to fix the light fixture.

Jiexin

THANKS

Contact Person: Janet Liu
Phone No.: +86-15099892502
E-mail: janetliu@hzjiexin.com.cn
Skype: [jiexin.janetliu@hotmail.com](https://www.hotmail.com/jiexin.janetliu)