



Cisco CCNA and CCNP
Instructor Begzodbek Odilov



Chapter: OSPF

OSPF xususiyatlari

- Classless-OSPFv2 CIDR va VLSM ni qo'lab quvatlaydi
- Efficient - eng yaxshi yolni talash uchun SPF algoritmdan foydalanadi
- Fast convergence - Tarmoq o'zgarishini tez tarqatadi
- Scalable-kichik va katta tarmoqlarda yaxshi ishlaydi
- Secure-MD5 va Secure Hash Algorithm (SHA)
- Administrative distance (AD)-110
- Multicast address - 224.0.0.5 va 224.0.0.6
- Algoritim - Djikstra




OSPF komponentlari

- OSPF uchta ma'lumotlar bazasini yaratadi va yuritadi
- Adjacency database -qo'shnilik jadvalni yaratadi.
- Link-state database (LSDB) -topologiya jadvalini yaratadi.
- Forwarding database - Router jadvalini yaratadi




OSPF komponentlari

- Link-State Operation

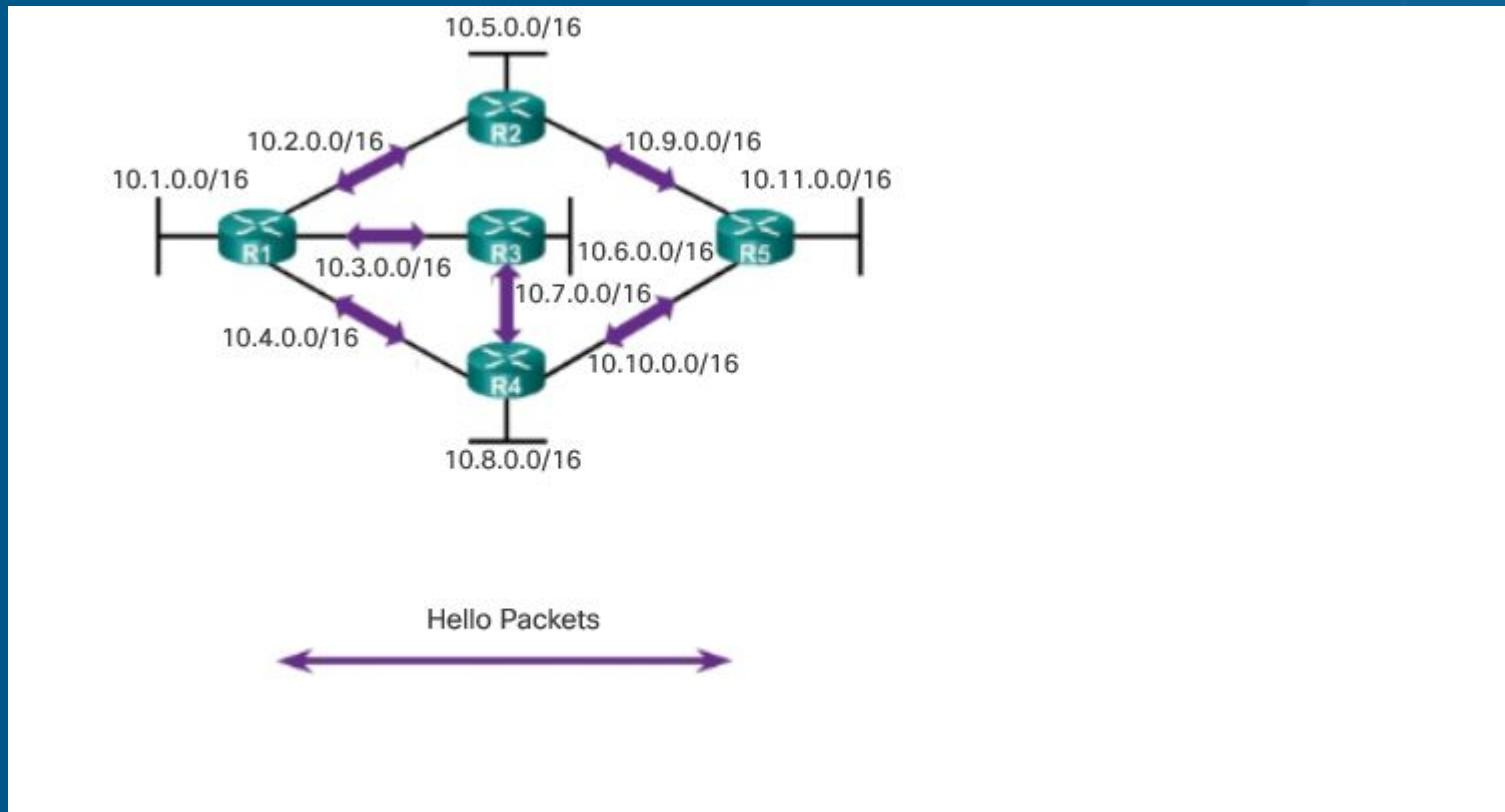


OSPF komponentlari

- Link-State Operation

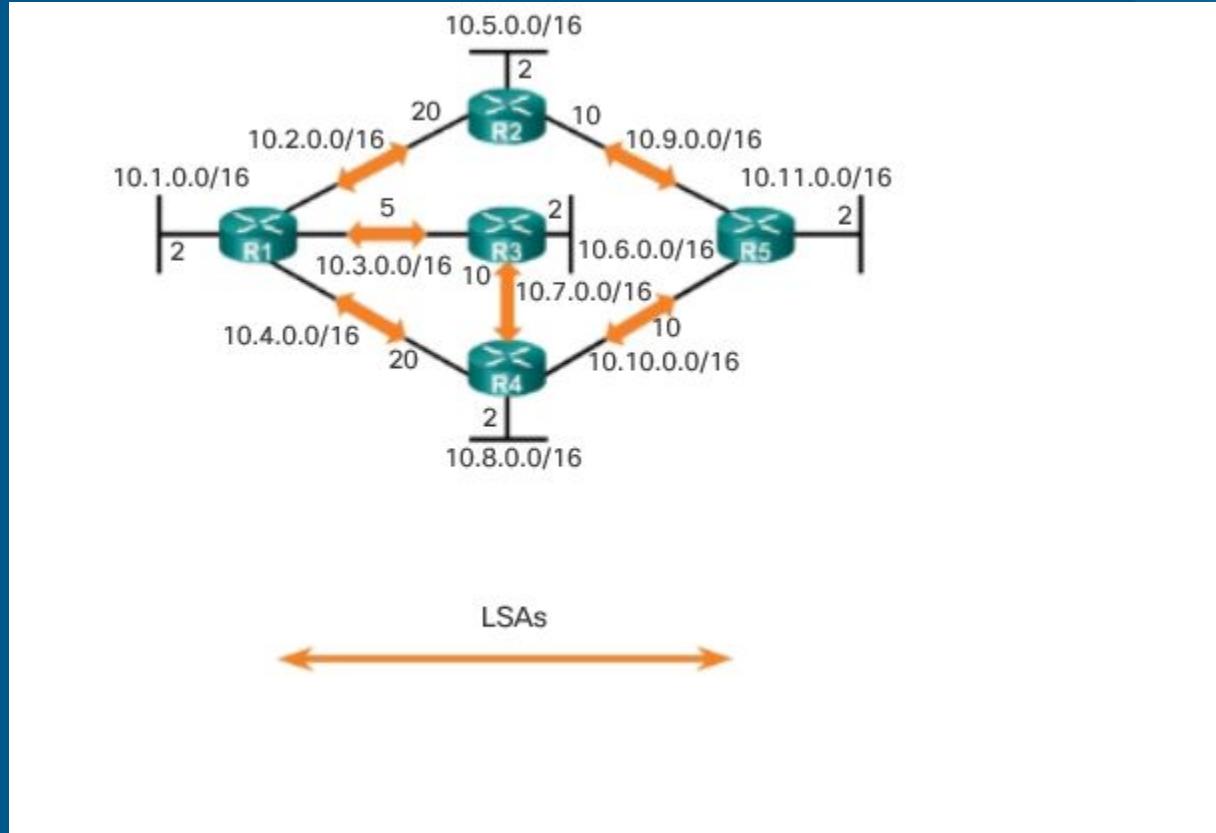


OSPF komponentlari

- Link-State Operation

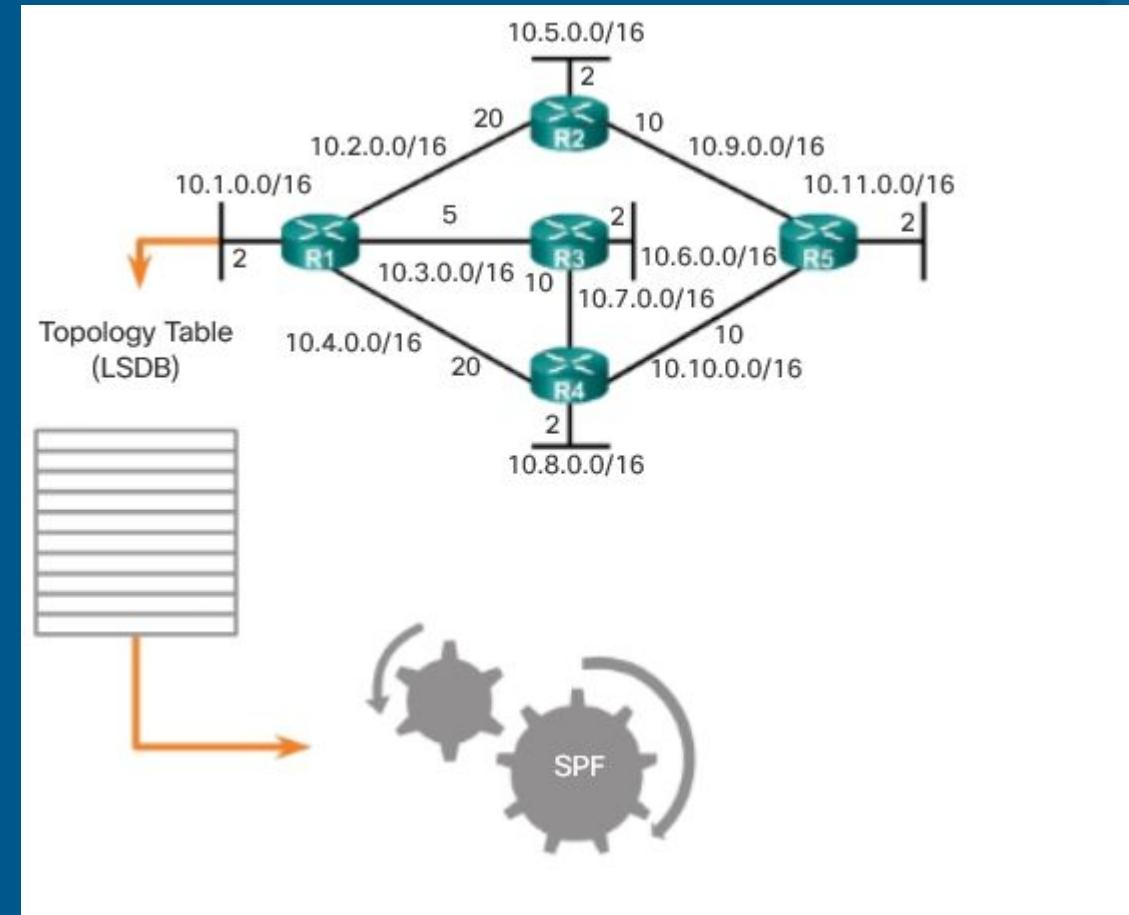


OSPF komponentlari

- Link-State Operation

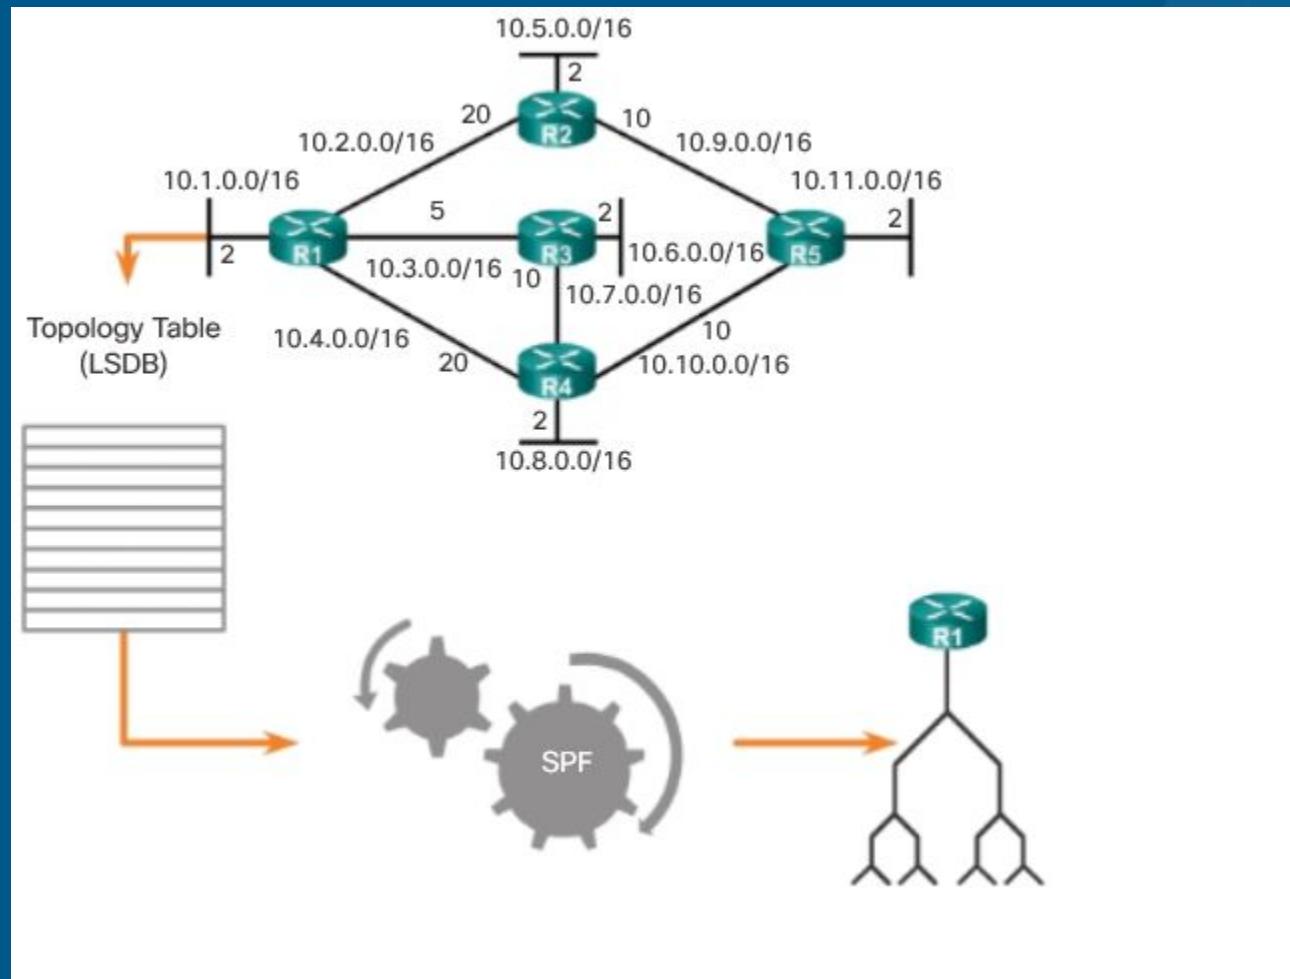



OSPF komponentlari

- Link-State Operation

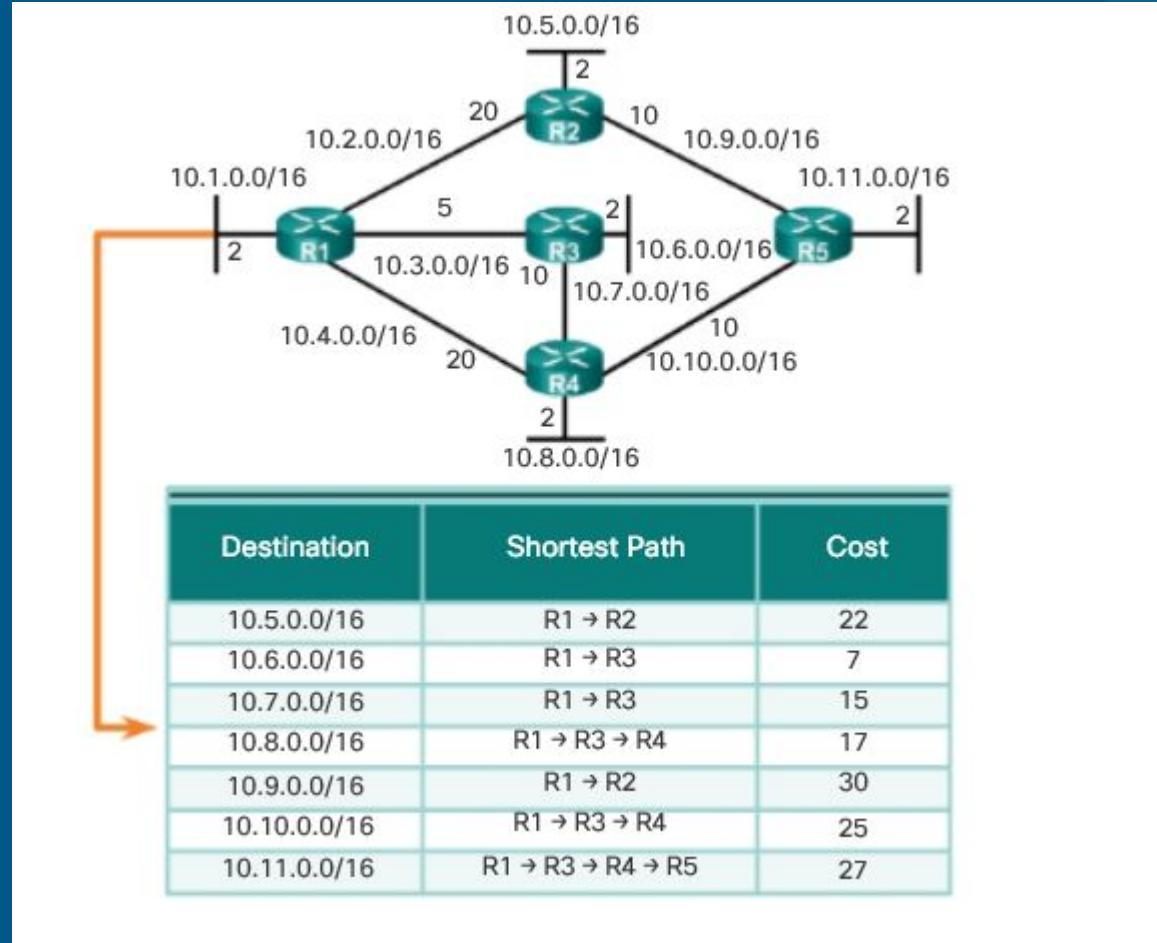

Single-Area and Multiarea OSPF

..

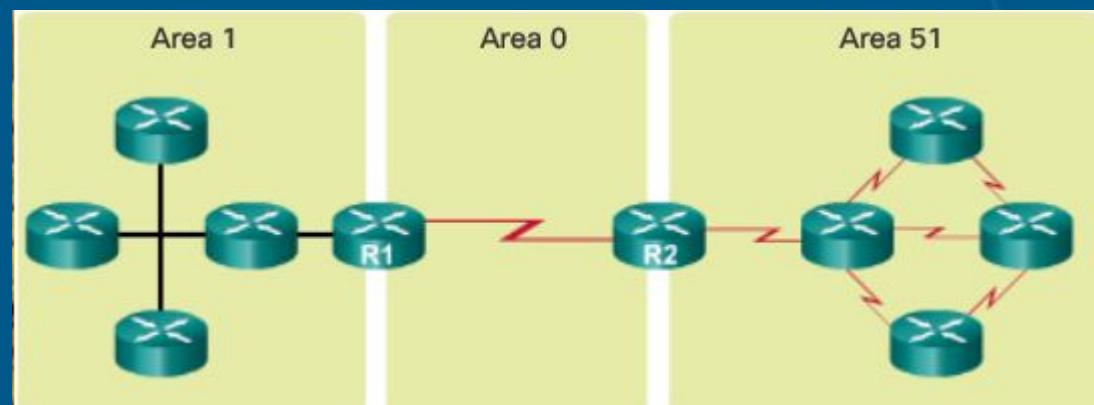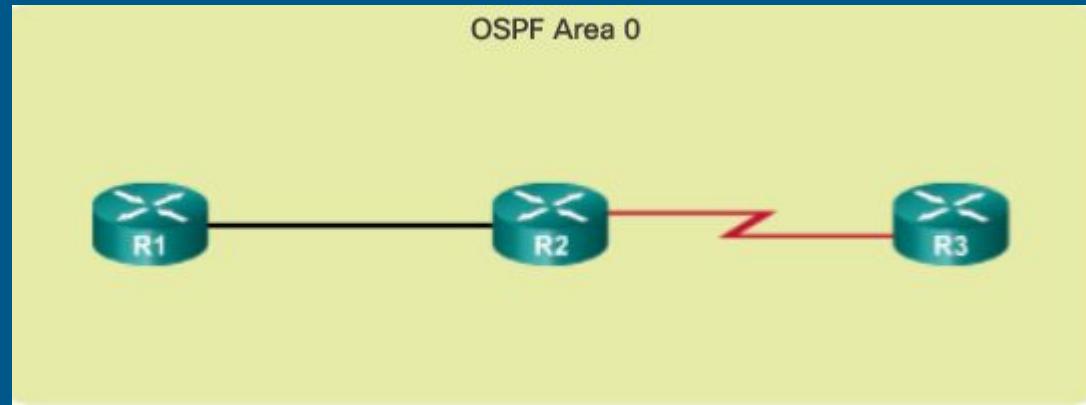

Types of OSPF Packets

- **Hello packet** - Qo'shnilikni o'rnatish
- **Database Description (DBD)** - LSDB ni tashlaydi va o'rganadi
- **Link-State Request (LSR)** - DBD haqida qo'shimcha malumot so'raydi
- **Link-State Update (LSU)** - LSR ga javob berish va yangilanishlarni yuboradi LSU ni 11 ta turi mavjud
- **Link-State Acknowledgment (LSAck)** - LSU paketlariga javob paket



Hello Packet

Multicast address 224.0.0.5 ipv6 FF02::5

- Router-id
- Hello time
- Dead time
- Area-id
- IP address va maska
- DR va BDR adreslar
- Qo'shnilar ro'yxari
- Router Priority



Salom Paket intervallari

- point-to-point networks - 10 sec
- non-broadcast multiple access [NBMA] networks; for example, Frame Relay - 30 sec
- Died time = 4 x hello



OSPF operatsion holatlari

- Down state - hello jo'natadi
- Init state - Helloni yetib borganiga ishonch hosil qiladi
- Two-Way state - Qo'shni bo'ladi
- ExStart state - DBD bazasini jonatadi
- Exchange state - DBD larni almashadi
- Loading state - o'ziga kerakli LSU , LSR larni so'raydi
- Full state - taylor



OSPF configuration

- Router ospf 10
 - Router-id 1.1.1.1
 - Network 192.168.1.0 0.0.0.255 area 0
 - Network 172.16.1.0 0.0.0.255 area 0
 - passive-interface gig 0/0
-
- OSPF cost = $10^8/bw$

