


КІЛЬВАТЕРНЕ ПРИСКОРЕННЯ ЧАСТИНОК В ПЛАЗМІ

(PLASMA WAKEFIELD ACCELERATION)

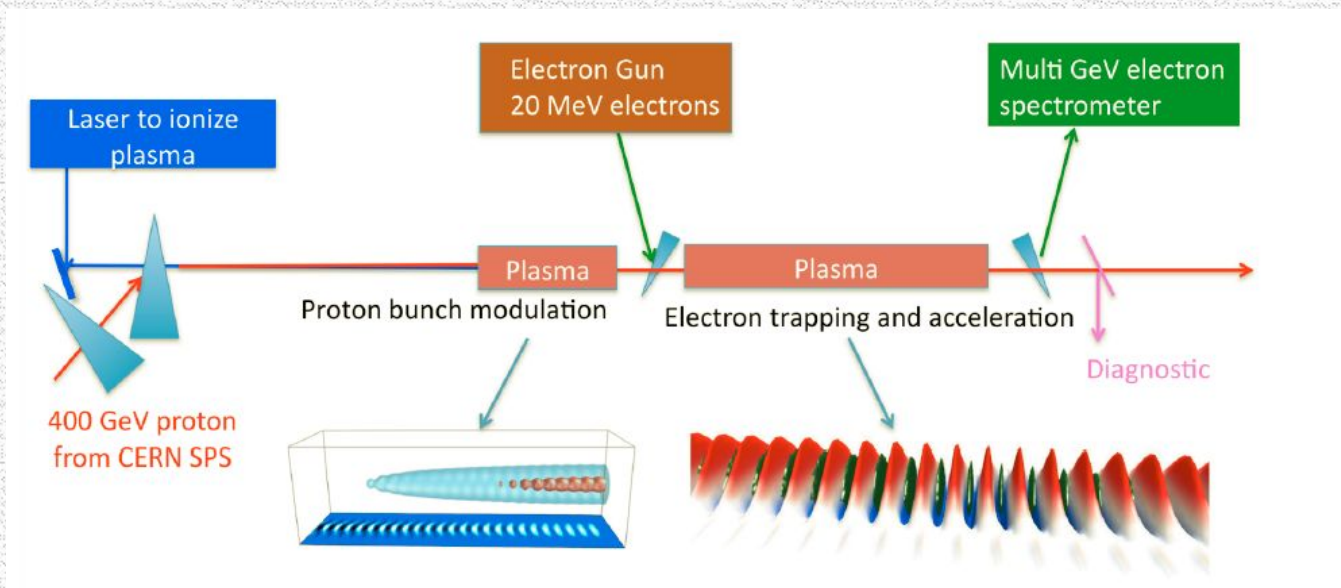

План лекції

1. Обмеження стандартних методів прискорення заряджених частинок
2. Основи кільватерного методу лазерного прискорення
3. Використання потужних лазерів та пучків заряджених частинок (електронів, протонів) для формування «бульбашкових» зон у плазмі.
4. Останні досягнення в області плазмового прискорення і найбільші проекти дослідження методів і інструментів для кільватерного прискорення в плазмі

Вимоги часу


- **Енергії до 100 TeV для адронів – «нова фізика»**
- **Колайдери електронів-позитронів – точні і однозначні визначення фундаментальних модельних параметрів**

LHC - > 6 млрд. долларів

FCC:

Future Circular Collider

100 TeV (pp)
340 GeV (e-e-)
80-100 км тунель
15-20 Т маг. поле

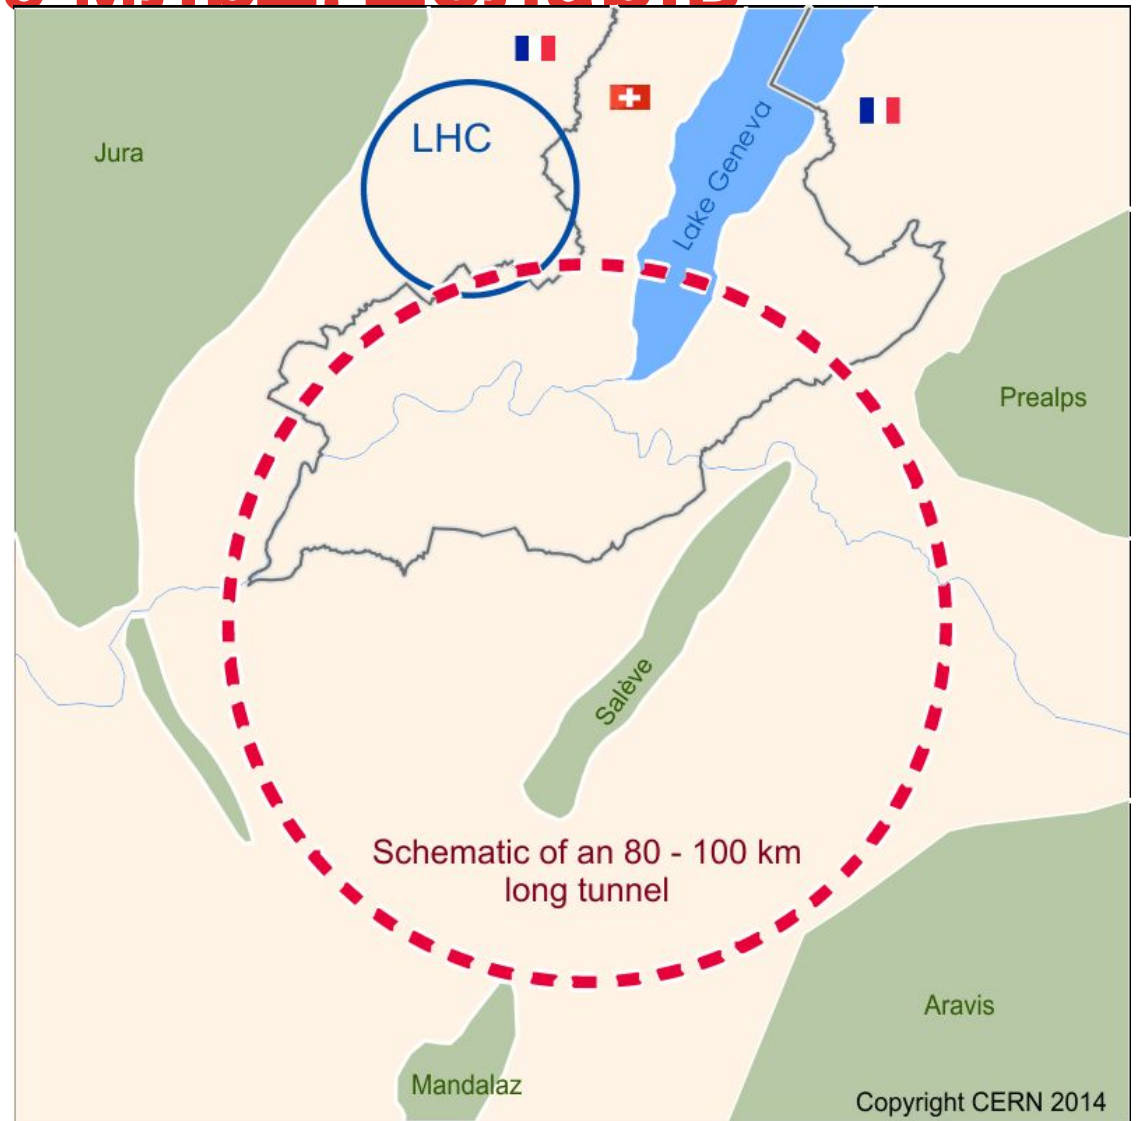

FCC - > ?? млрд долларів




ILC - CLIC

Оцінена вартість – від 8 до 20 млрд.
доларів


Обмеження:

- 100 МВ/м
- Синхротронн
е
випромінювання

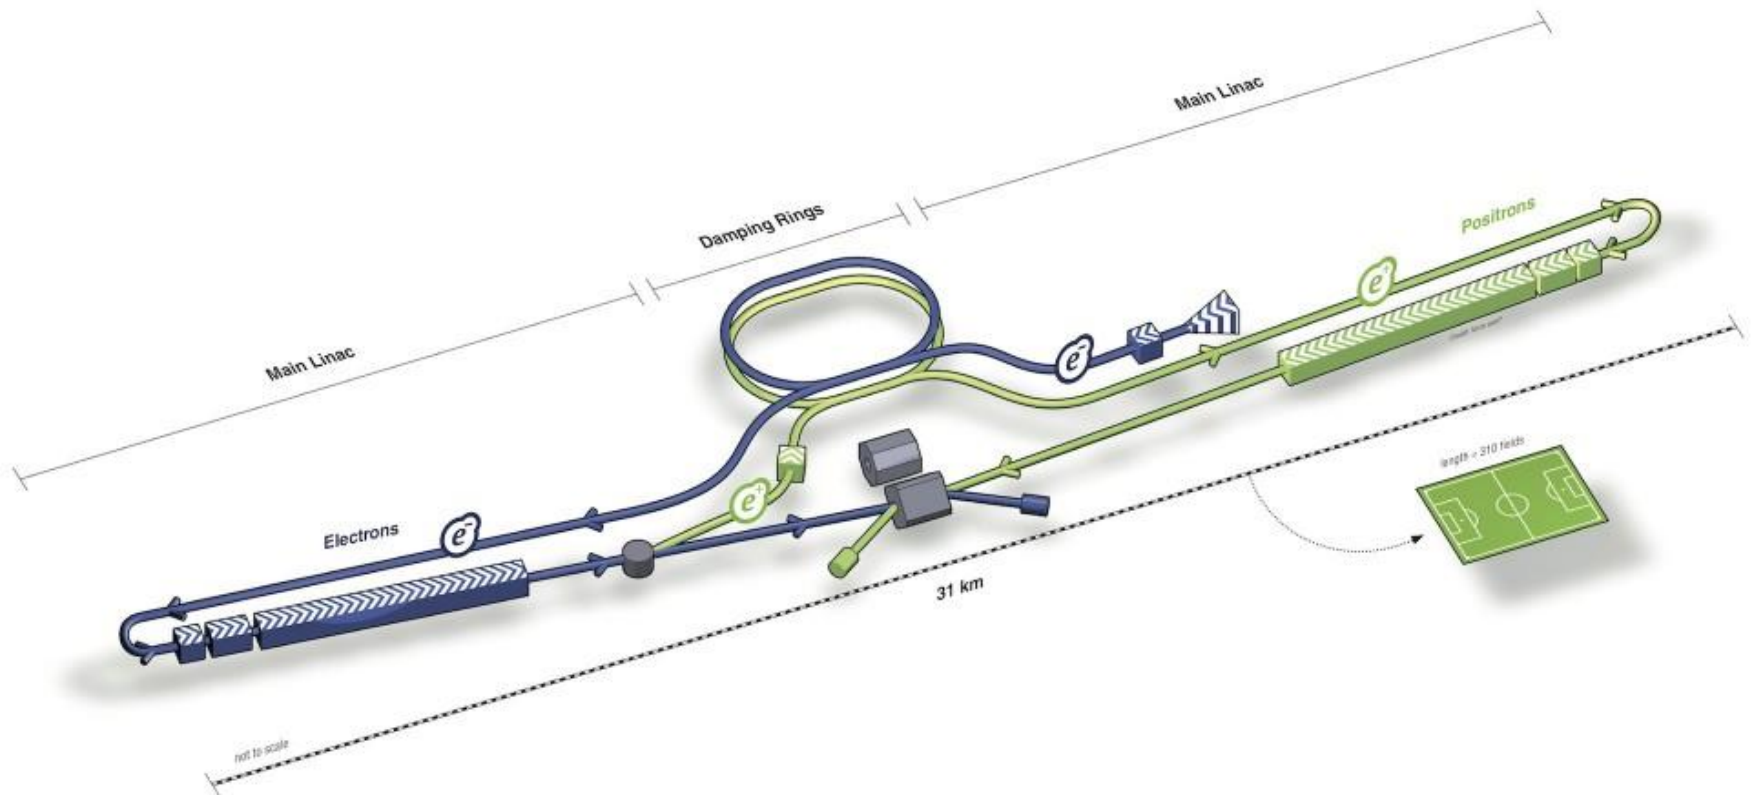



Fermilab

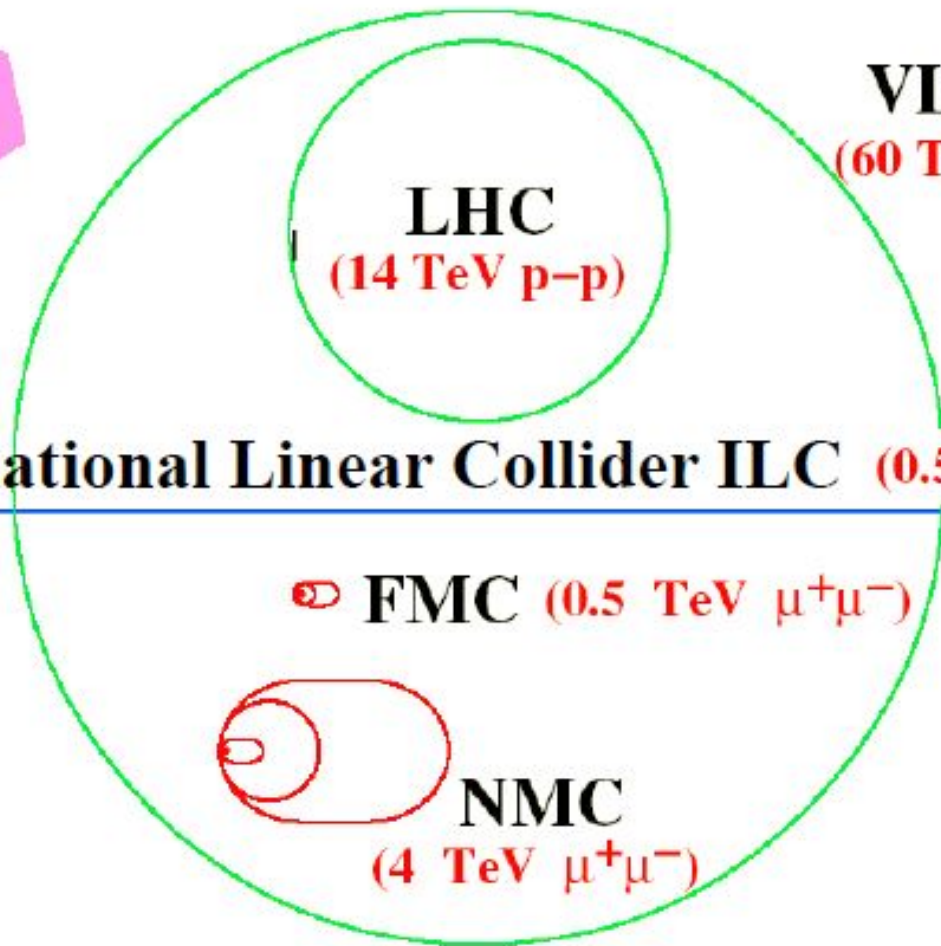

VLHC
(60 TeV p-p)

LHC
(14 TeV p-p)

International Linear Collider ILC (0.5 – 1.0 TeV e^+e^-)

FMC (0.5 TeV $\mu^+\mu^-$)

NMC
(4 TeV $\mu^+\mu^-$)


10 Km

Обмеження в циклічному адронному
колайдері

$$p = e R B_y$$

Обмеження в циклічному лептонному (e-e⁺)
колайдері

$$U_{loss} \propto \frac{E^4}{R}$$

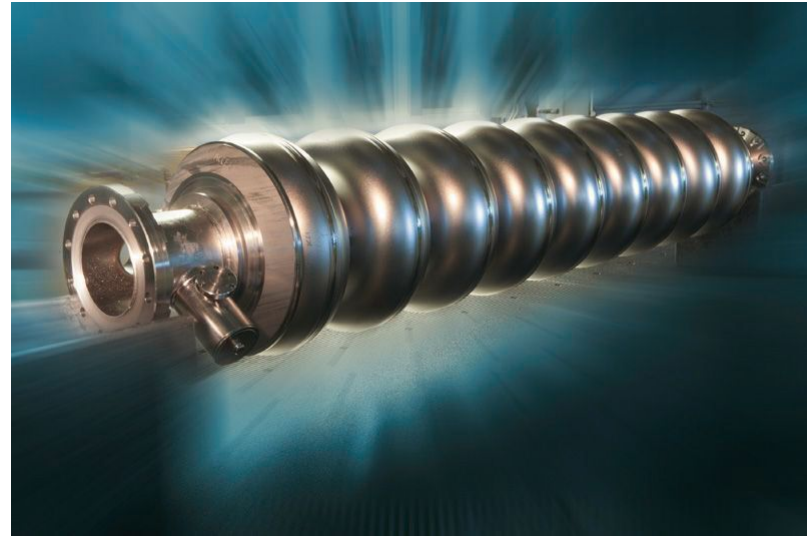

Обмеження:




- 100 МВ/м
- Синхротронн
е

випромінюванн
я


Відмовляючись від циклічних прискорювачів – уникаємо проблеми потужних магнітів для повороту і втрат на синхротронне випромінювання


Але обмеження по градієнту поля вимагають довжин прискорюючих структур в 30 - 50 км

Project	Gradient	Type	Year
SLC	20 MV/m	Room-temperature	1988 – 1997
ILC	35 MV/m	Super-conducting	design
XFEL	24 MV/m	Super-conducting	In construction
CLIC	100 MV/m	Room-temperature	design

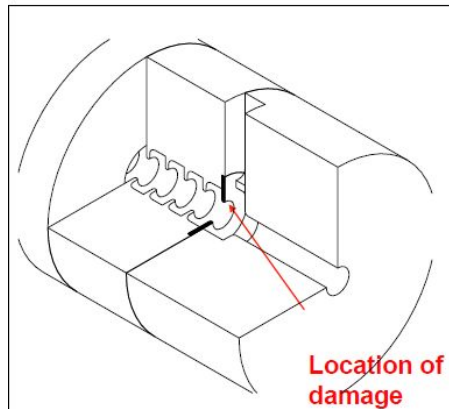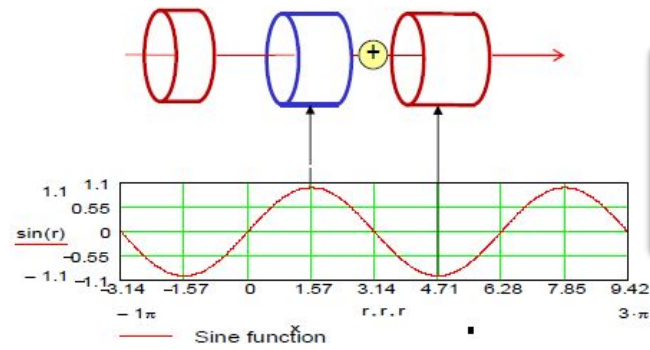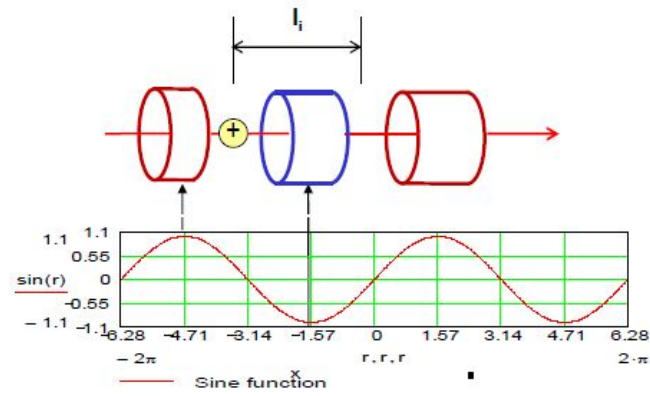

Single feed power coupler
30 GHz, 16 ns, 66 MV/m
local accelerating gradient

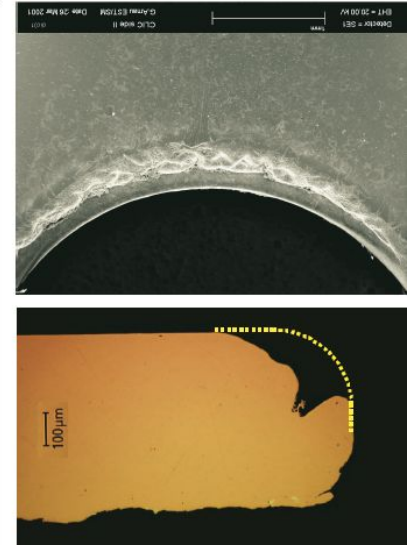

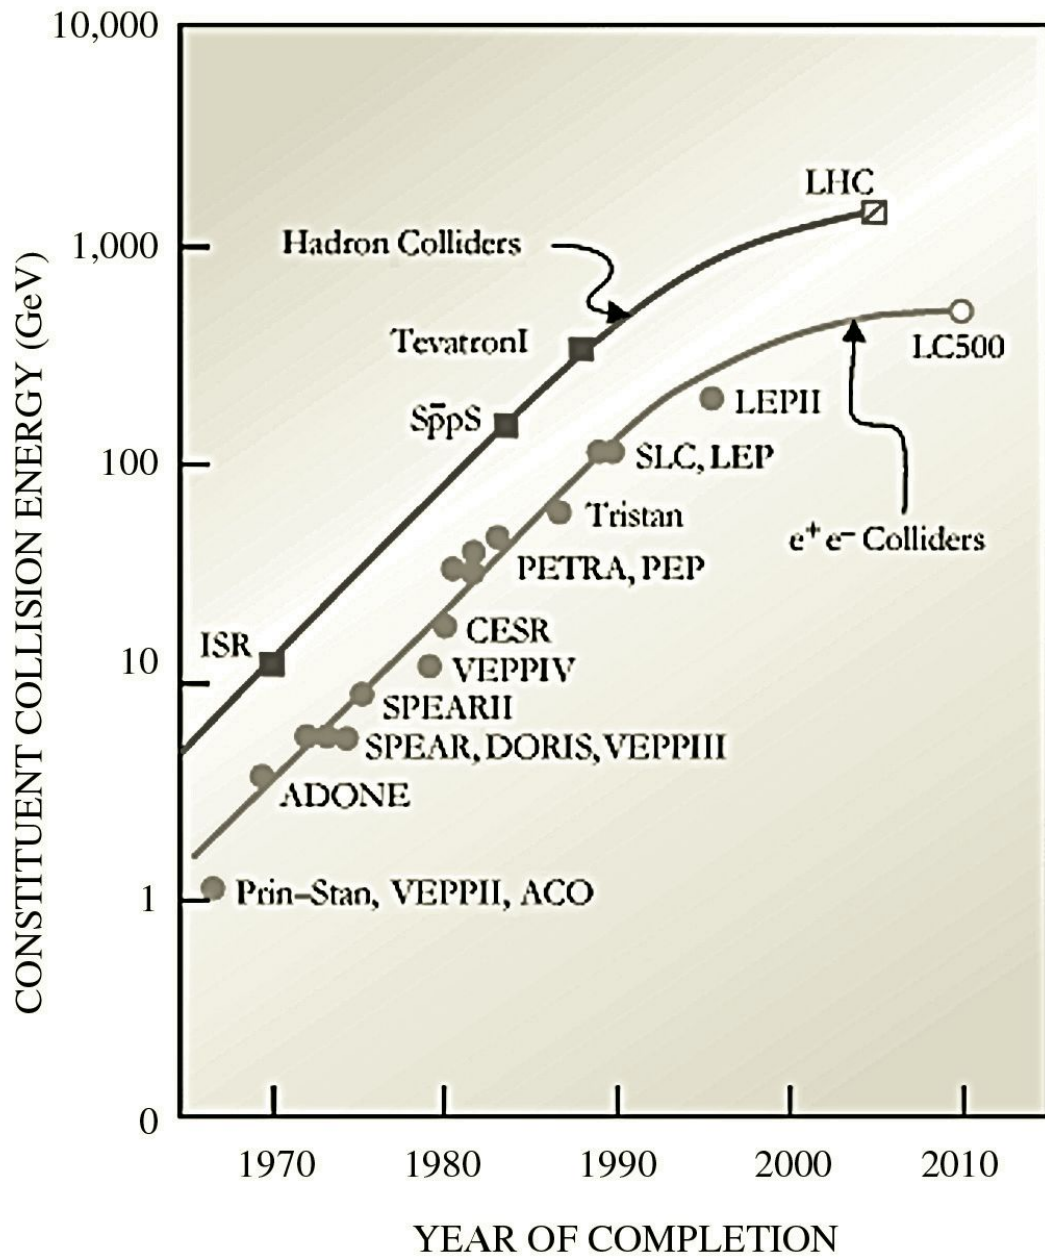

Діаграма Лівінгстона

Експоненційний ріст
припиняється

Де вихід з глухого

кута???!!!!





Як мінімум один тунель, здається, закінчується світлом



Plasma acceleration

Плазмові методи
прискорення

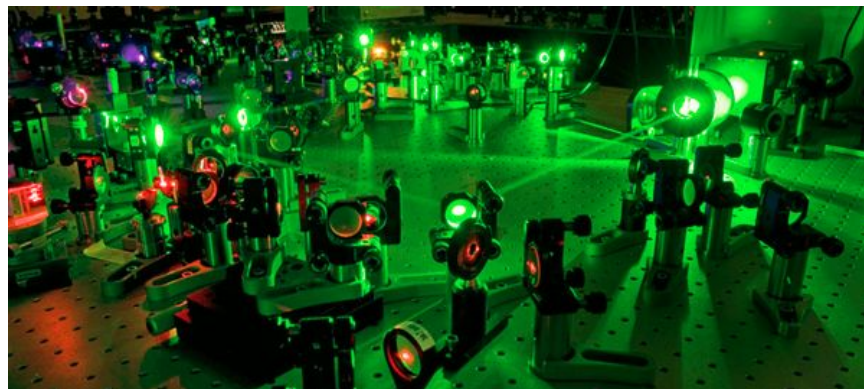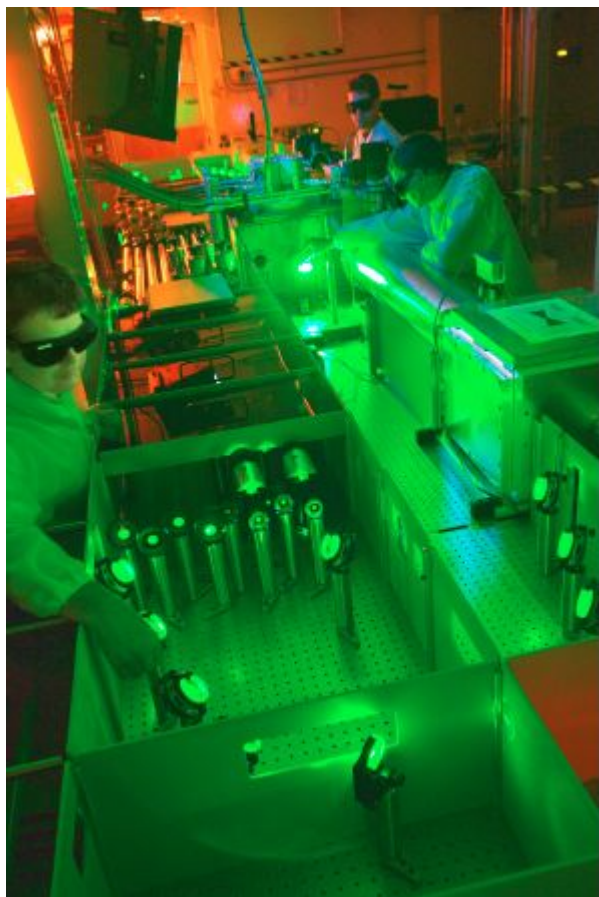

Прогрес в розвитку потужних лазерів – мультитераватні і петаватні лазери

Напруженості поля - гігавольти і теравольти на м

**Але це напруженості в поперечному напрямку,
а потрібно – в повздовжньому напрямку**

Transverse to Longitudinal

- Ідея: використати плазму для конвертування поперечного електричного поля лазерного випромінювання в поздовжнє поле в плазмі

VOLUME 43, NUMBER 4

PHYSICAL REVIEW LETTERS

23 JULY 1979

Laser Electron Accelerator

T. Tajima and J. M. Dawson

Department of Physics, University of California, Los Angeles, California 90024

(Received 9 March 1979)

An intense electromagnetic pulse can create a wake of plasma oscillations through the action of the nonlinear ponderomotive force. Electrons trapped in the wake can be accelerated to high energy. Existing glass lasers of power density 10^{16} W/cm² shone on plasmas of densities 10^{18} cm⁻³ can yield gigaelectronvolts of electron energy per centimeter of acceleration distance. This acceleration mechanism is demonstrated through computer simulation. Applications to accelerators and pulsers are examined.

Collective plasma accelerators have recently received considerable theoretical and experimental investigation. Earlier Fermi¹ and McMillan² considered cosmic-ray particle acceleration by moving magnetic fields¹ or electromagnetic waves.² In terms of the realizable laboratory technology for collective accelerators,

the wavelength of the plasma waves in the wake:

$$L_1 = \lambda_w / 2 = \pi c / \omega_p. \quad (2)$$


An alternative way of exciting the plasmon is to inject two laser beams with slightly different frequencies (with frequency difference $\Delta\omega \sim \omega_p$) so that the beat distance of the packet becomes

Concepts For Plasma-Based Accelerators

Pioneered by J.M. Dawson


- Plasma Wake Field Accelerator(PWFA)

A high energy electron/proton bunch




- Laser Wake Field Accelerator(LWFA)

A single short-pulse of photons

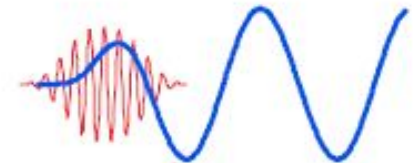

- Plasma Beat Wave Accelerator(PBWA)

Two-frequencies, i.e., a train of laser pulses




- Self Modulated Laser Wake Field Accelerator (SMLWFA)




Raman forward scattering
Instability



evolves to

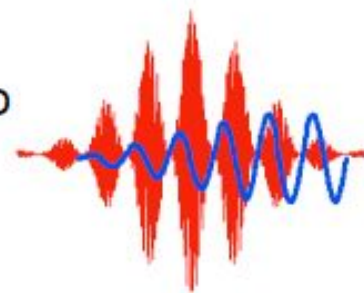

Принцип дії кильватерного поля

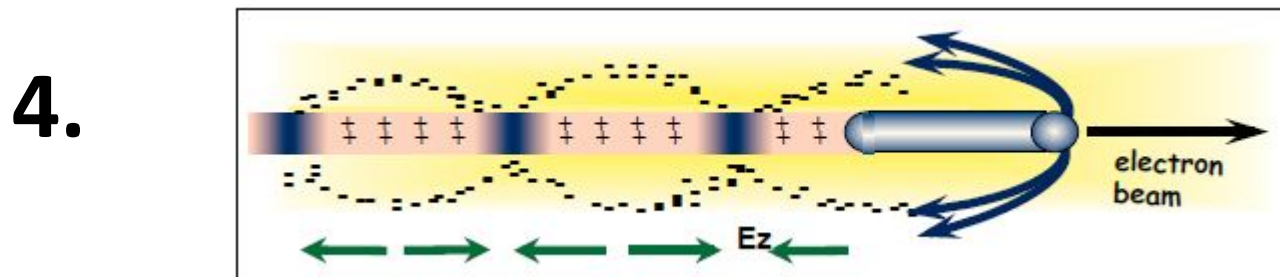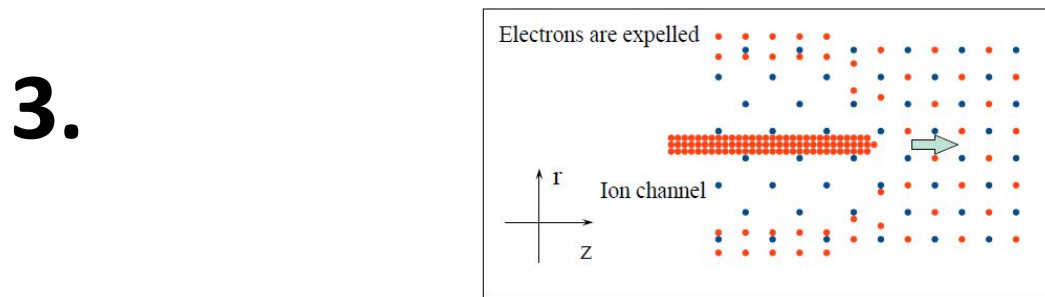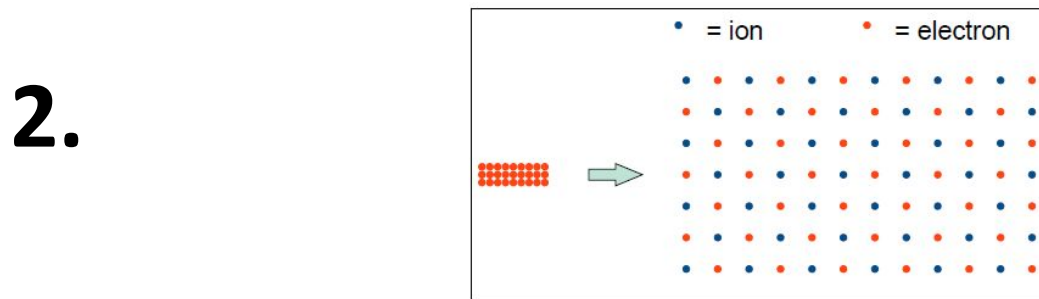


Звичайний лінійний прискорювач

Copper Structure with irises

Powered by microwaves

Energy Gain 20 MV/m

Structure Diameter 10cm

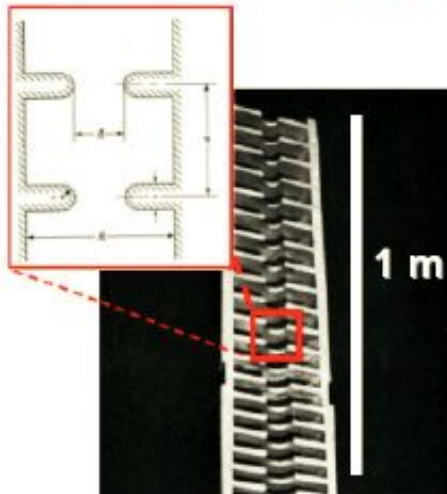

BIG PHYSICS BECOMES SMALL

Плазменний прискорювач


Ionized Gas

Lifetime, few picoseconds


Powered by a Laser or electron beam pulse

Energy Gain 20 GV/m


Diameter 0.1-1 mm

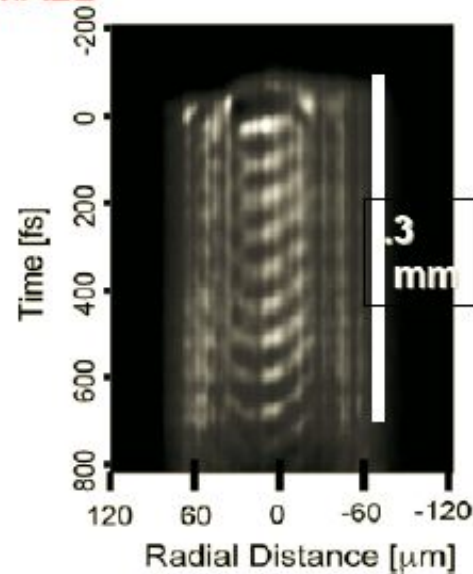

Поперечні поля в кільватерному методі треба контролювати

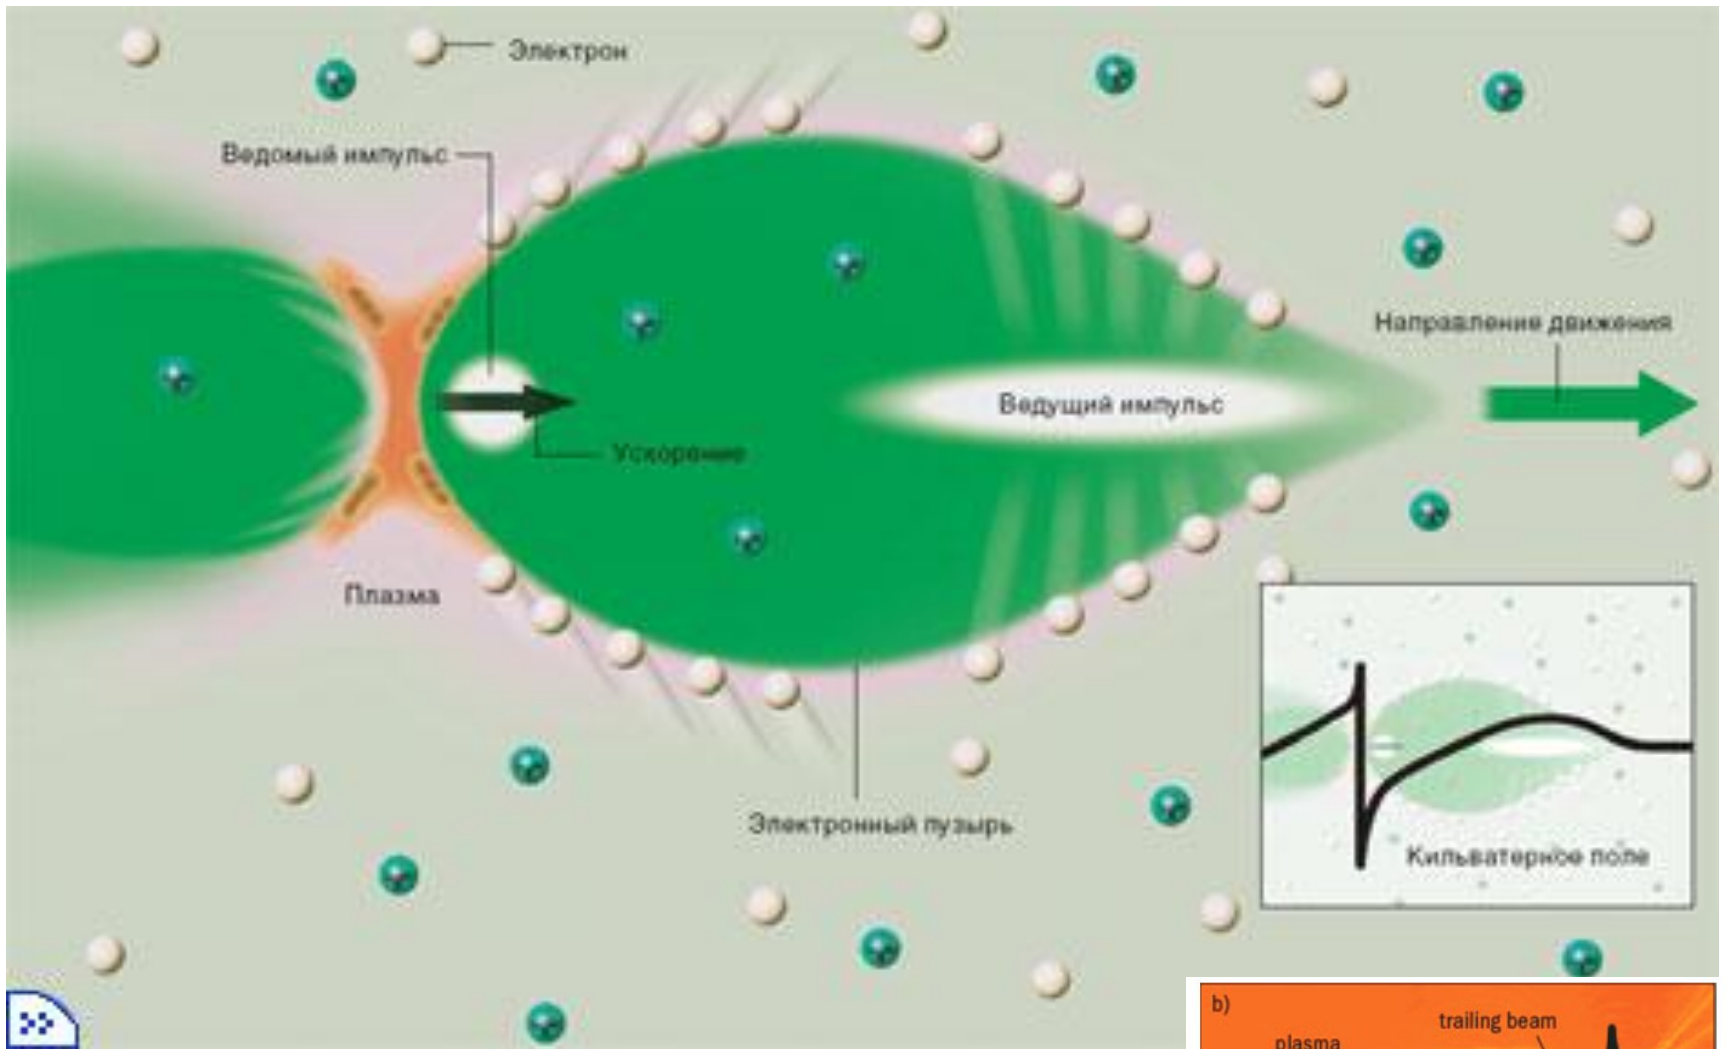

Лазерне і плазмове кильватерні поля

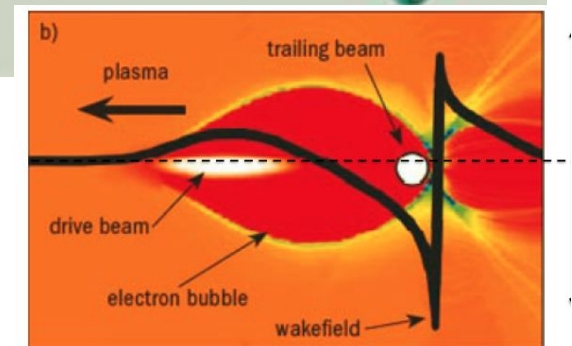



On axis net charge: + - +

Експерименти у Французькому політехнічному
інституті

State of Art of Laser-Plasma Accelerators

Victor Malka

*LOA, ENSTA - CNRS - École Polytechnique,
91761 Palaiseau cedex, France*

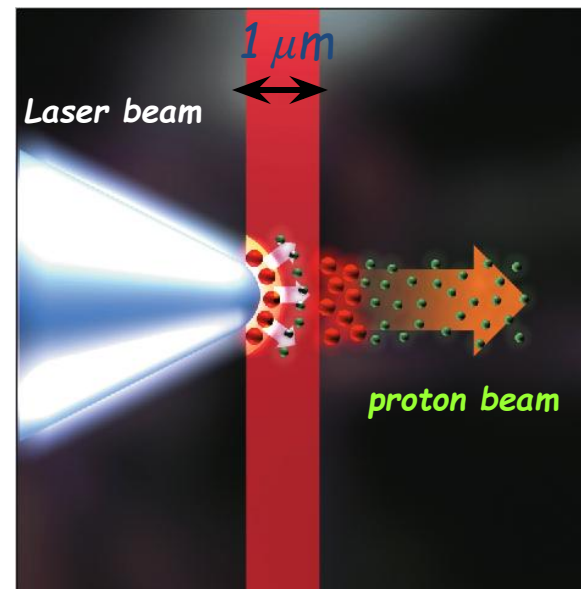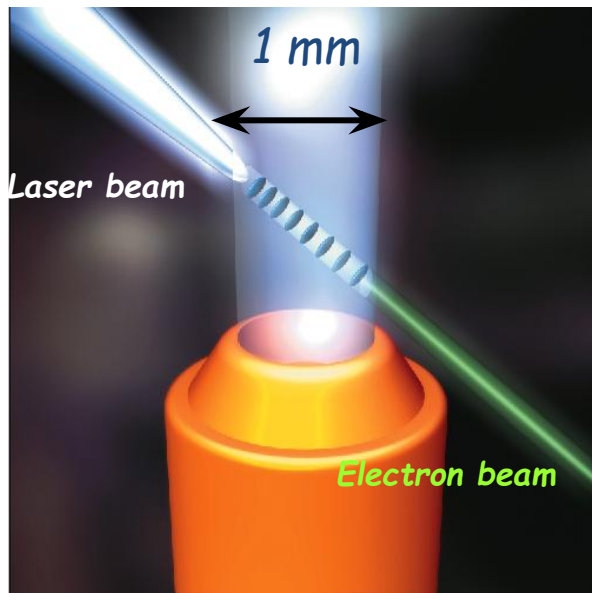





Режим фокусування і «автофазування»

Потужність лазерів від 10 ГВт (настільні системи) і більше

Імпульси електронів **довжиною до 10 фс !!!!!!!**

Розкид по енергії менше 10%, малий розкид по куту

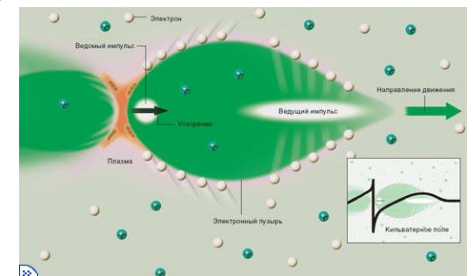

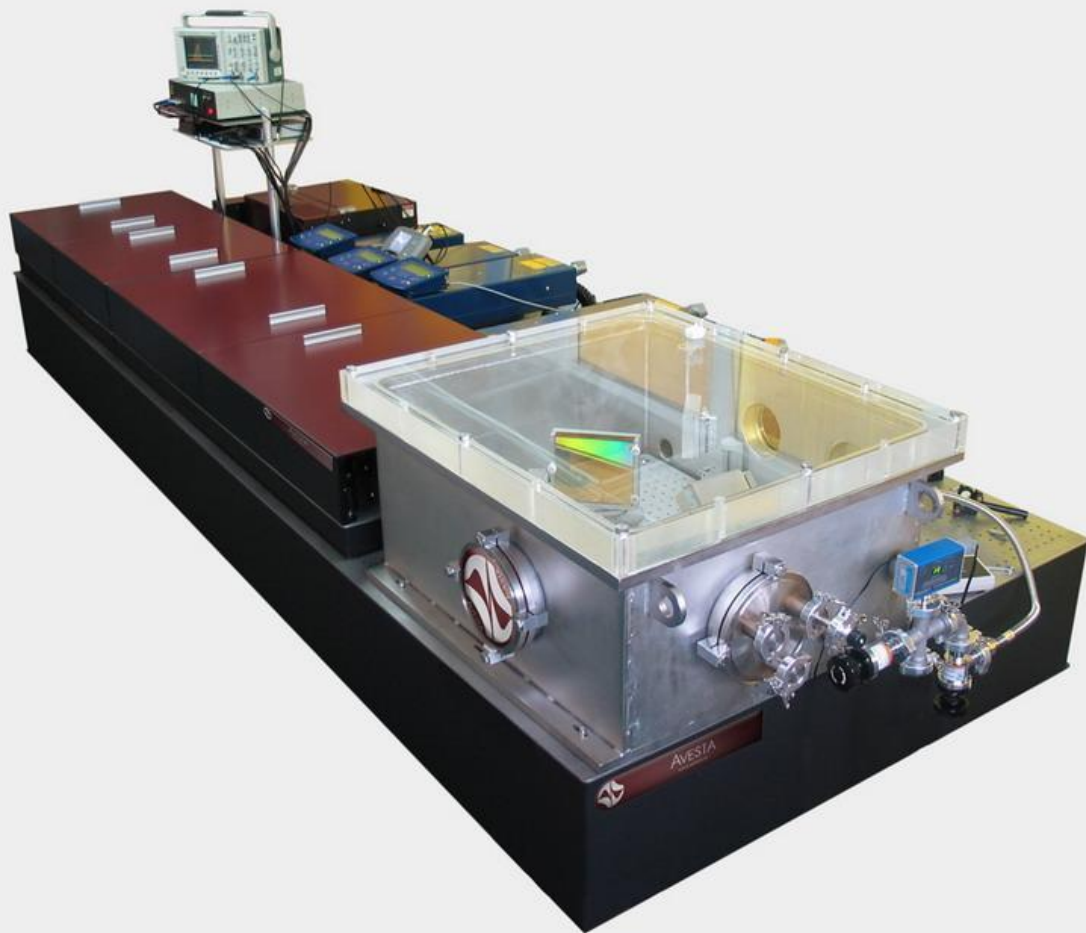

Титан-сапфировая тераваттная система AVET

Располагается на одном оптическом столе *

Коммерческий продукт *

Длительность импульса менее 45 фс *

Высокое качество пучка *

Высокая стабильность *


Применение:

- Лазерное ускорение частиц
- Исследования по термоядерному синтезу
- Генерация рентгеновского излучения и аттосекундных импульсов
- Задающий блок для систем петаваттного уровня
- Изучение плазмы
- Исследования атмосферы и контроль электрических разрядов


Потужність лазерів від 10 ТВт (настольні системи) і більше

Імпульси електронів **довжиною до 10 фс !!!!!!!**


Прогрес в лазерній технології

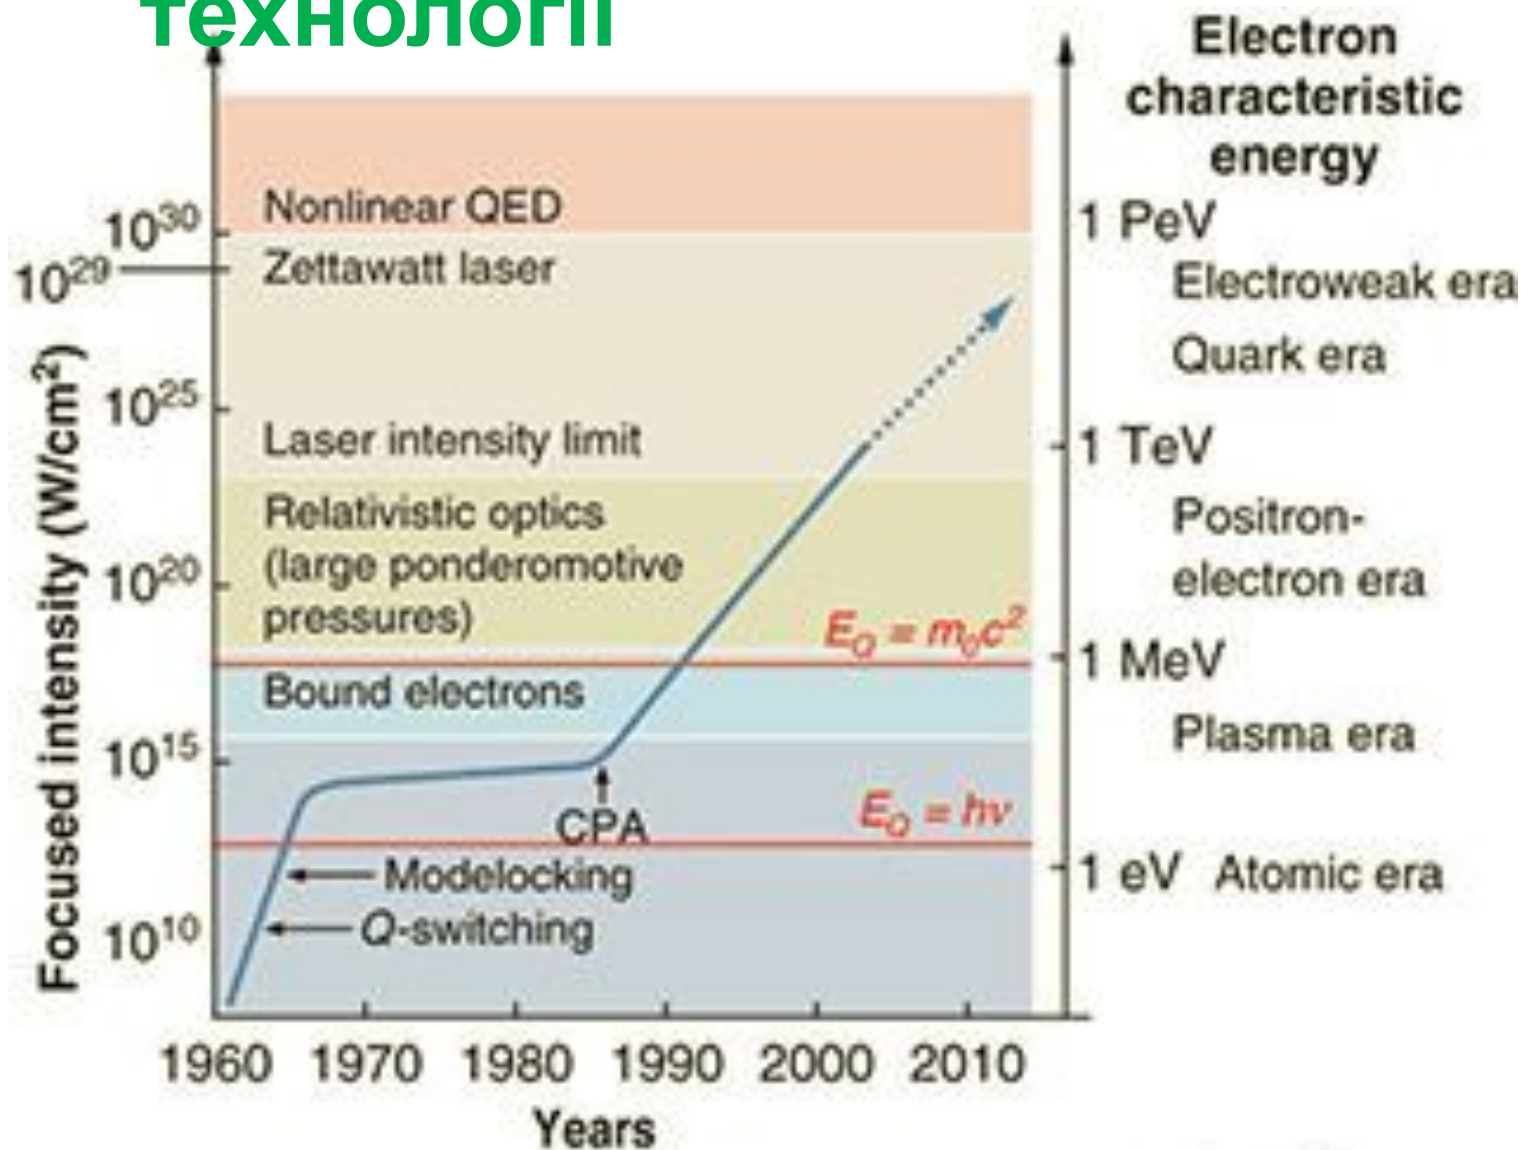

Ефект достатньої потужності лазера для утворення нелінійного режиму з кавітаційними бульбашками

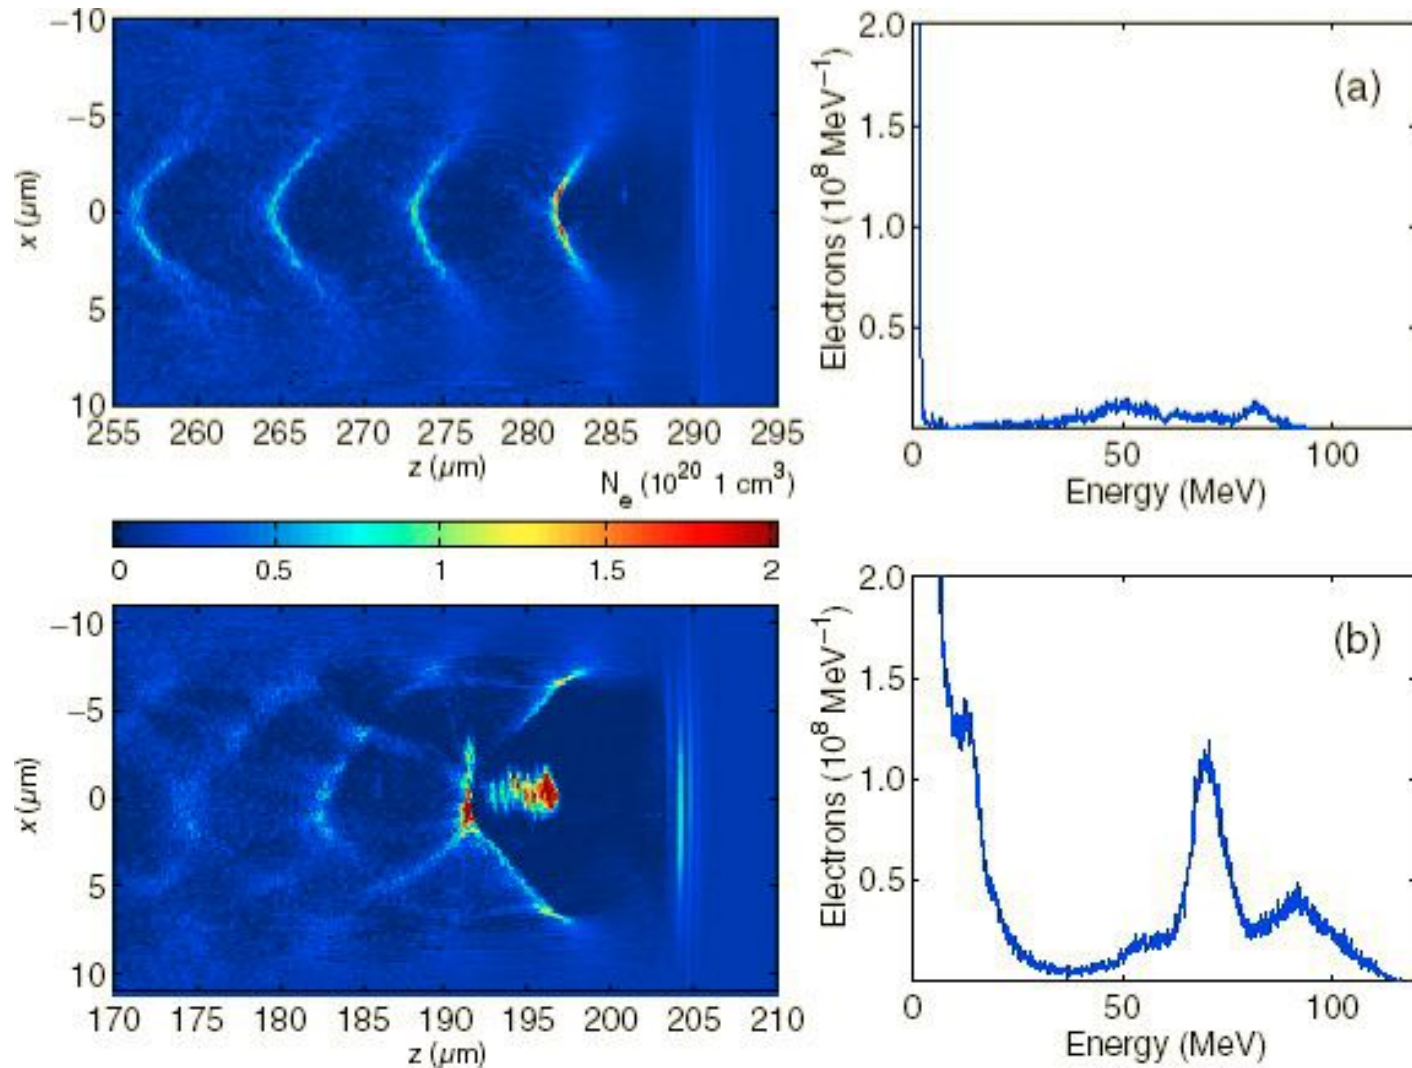


Прискорення в капілярі

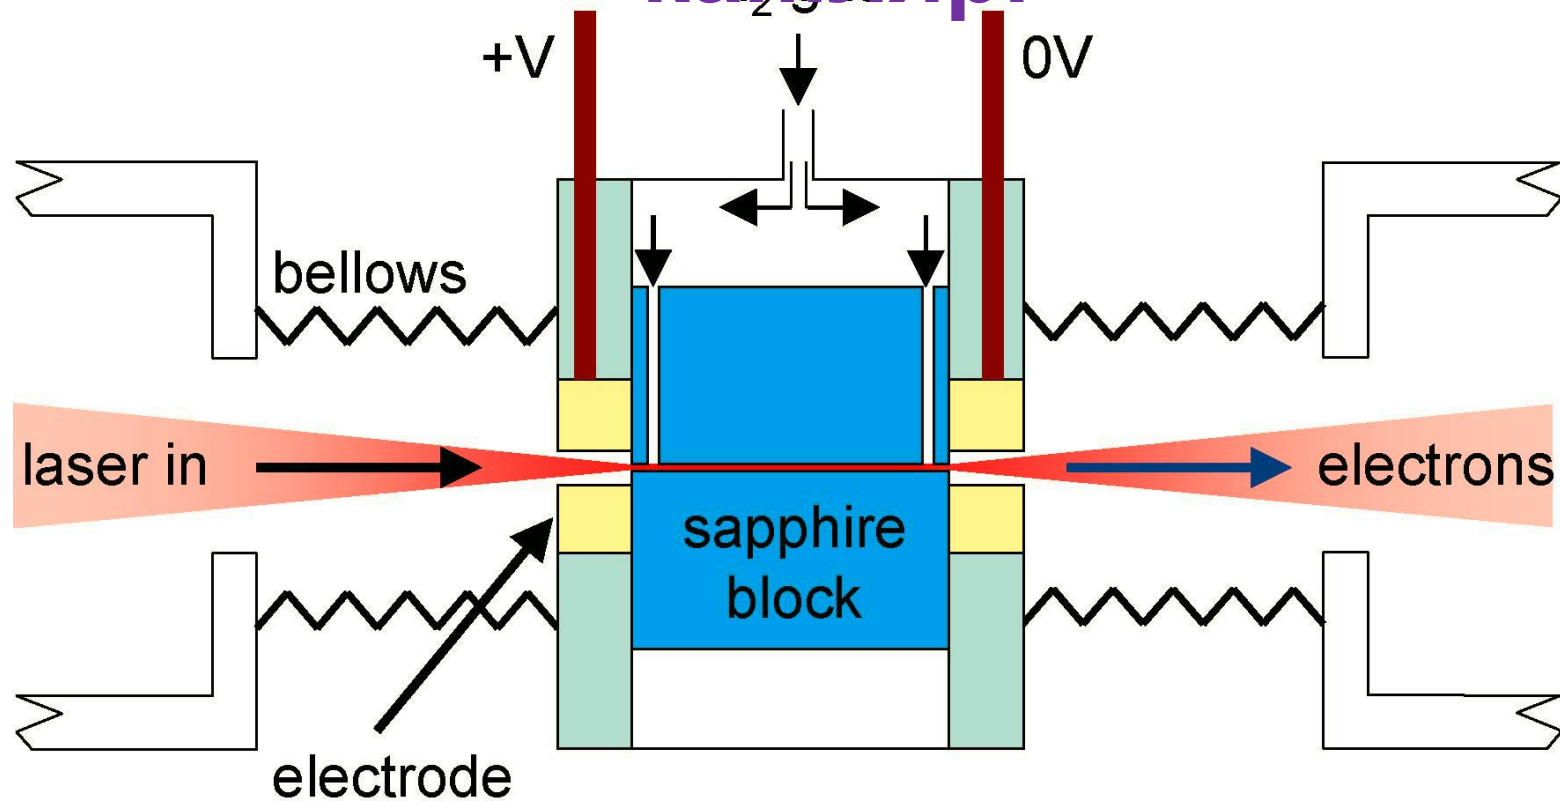


Частково вирішує проблему зменшення густини плазми при одночасному забезпеченні значної довжини прискорення

В 2006 році досягнуто енергії 1 Гев з використанням прискорення в капілярі

a)

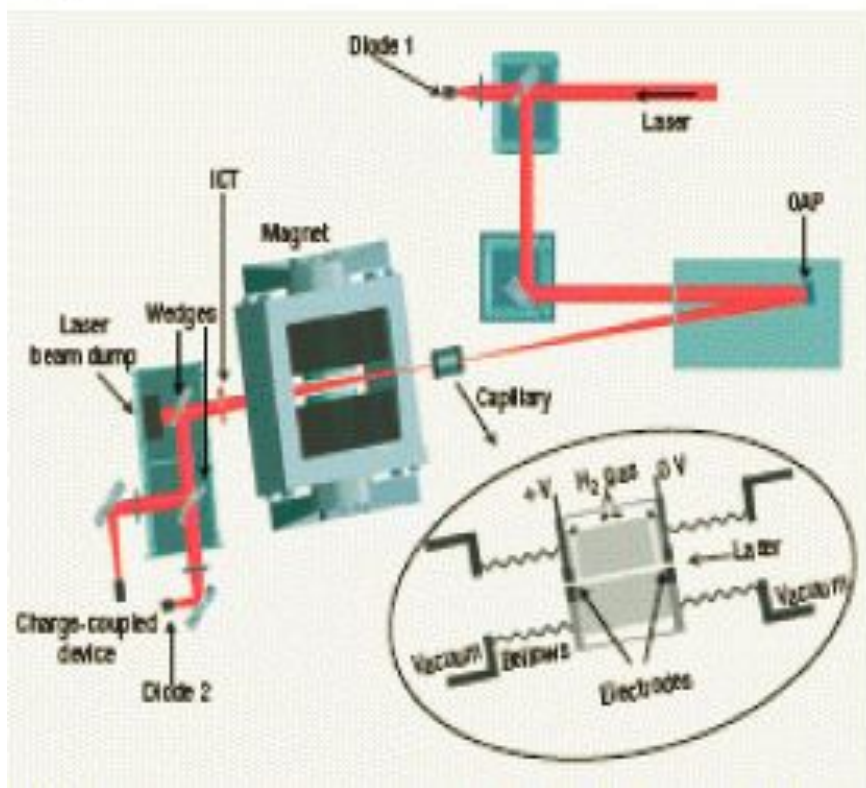

b)

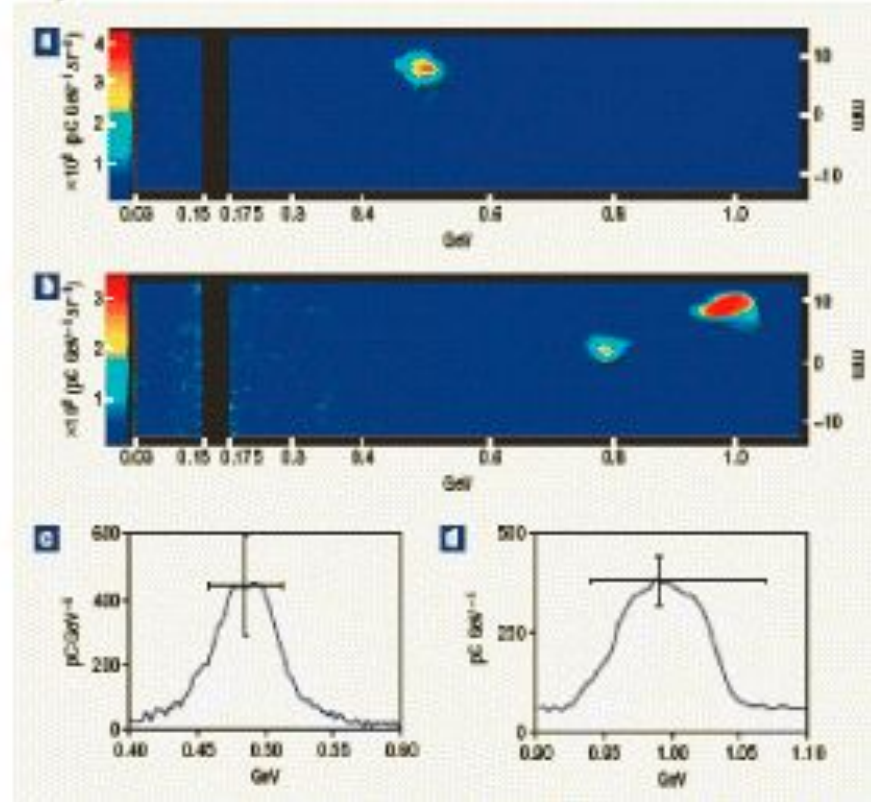



World-Wide Interest in Plasma Acc.

Plasma Acceleration on the Globe, T. Katsuoelas



D. H. Froula

2010 Advanced Accelerator Conference

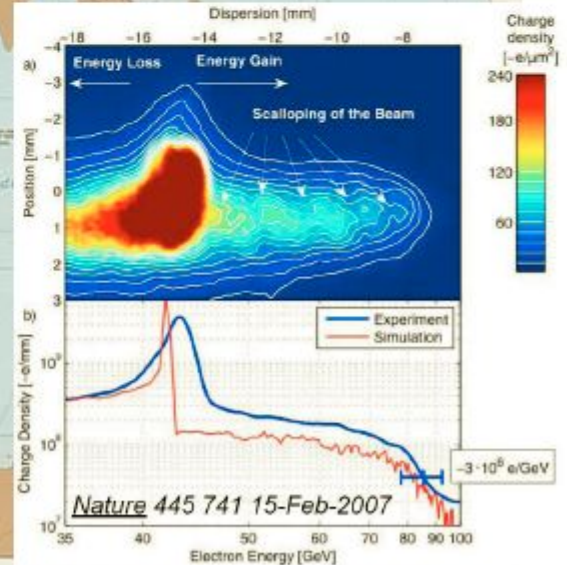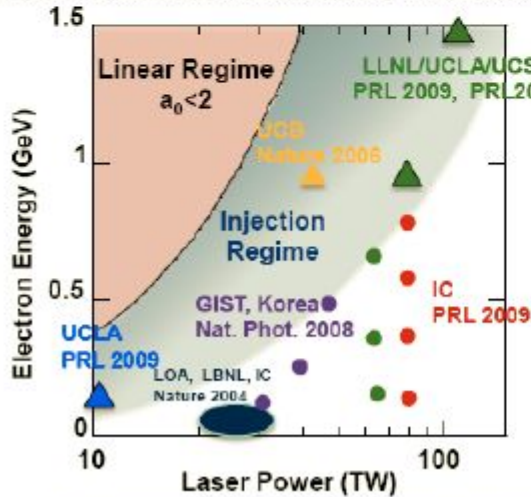


● Laser Wake Expts

● Electron Wake Expts

● e-/e+ Wake Expts

Найбільші проекти (вибране)

<http://www.eli-laser.eu/>

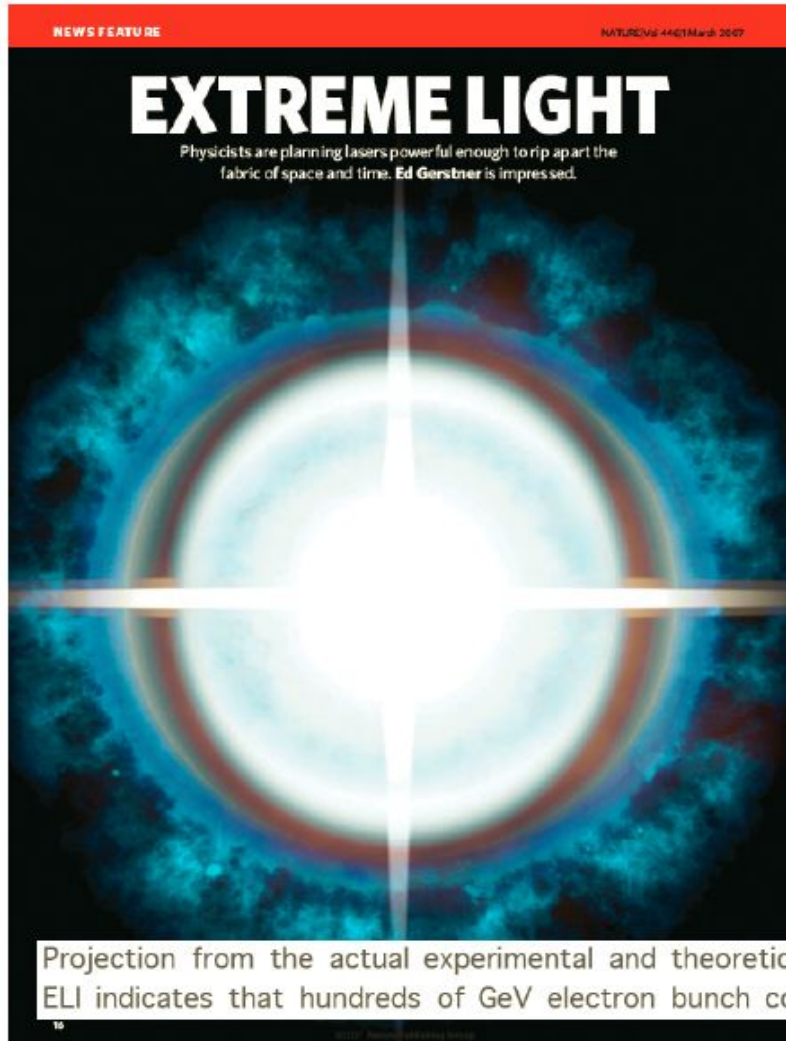

Europe: ELI

European Project
for development of
extreme light

Beam acceleration
is one work package

Budget for 4 Euro-
pean sites:

1 billion €

... hundreds of GeV ...

BELLA

28 МЛН.
доларів

<http://www.lbl.gov/community/bella/>

To use laser light to accelerate an electron beam to 10 GeV (10 billion electron volts) or more in the comparatively short distance of approximately one meter



[About the Lab](#)

[Leadership/Organization](#)

[Calendar](#)

[News Center](#)

[Today At Berkeley Lab](#)

BELLA: The Berkeley Lab Laser Accelerator

[Community](#)

[Richmond Bay Campus](#)

[Planning](#)


[Tours](#)

[Community Programs](#)

[Friends of Berkeley Lab](#)

Project Description

BELLA, the Berkeley Laboratory Laser Accelerator will create an experimental facility for further advancing the development of laser-driven plasma acceleration.

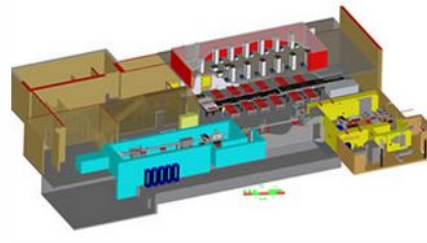

BELLA's unique attribute is the ability to use laser light to accelerate an electron beam to 10 GeV (10 billion electron volts) or more in the comparatively short distance of approximately one meter.

This technology holds great promise for dramatically reducing the size, cost, energy usage, and environmental impact of future accelerators, particularly high-energy electron-positron colliders. BELLA's development could pave the way for future accelerators to be hundreds of times shorter and more compact than current technologies while producing high quality

IN PROCESS

- Computational Research and Theory (CRT) Facility
- Solar Energy Research Center (SERC)
- Seismic Life Safety, Modernization, and



FACET

20 млн.
доларів

https://portal.slac.stanford.edu/sites/ard_public/facet/Pages/default.aspx

FACET provides high energy density electron and positron beams with peak currents of approximately **20 kA** that are focused down to below **30x30 micron** transverse spot size at an energy of **20 GeV**.



DOE | Stanford | SLAC | SSRL | LCLS | AD | PPA | Photon Science | PULSE | SIMES

FACET
An Office of Science User Facility

SIGN IN



± SLAC Detailed Index | SLAC Web | People

About FACET & Test Facilities

AD SLACPortal > Accelerator Research Division > FACET User Facility

FACET & Test Facilities User Portal

User Registration and Resources

Proposal Process

FACET Facility

NLCTA Facility

ESTB Facility


ASTA Facility

FACET Division (Password Required)


FACET&TF News

Old FACET Users Portal

Old ESTB Users Portal

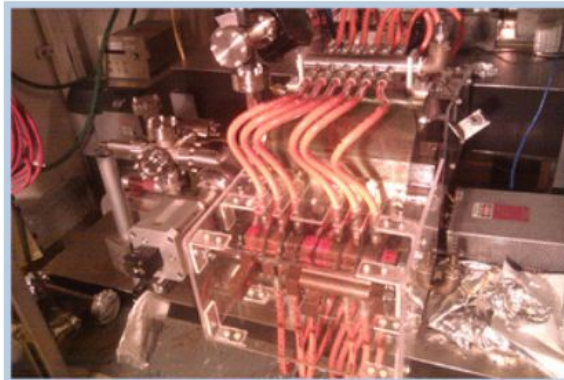

X-band RF photo injector in the ASTA test stand

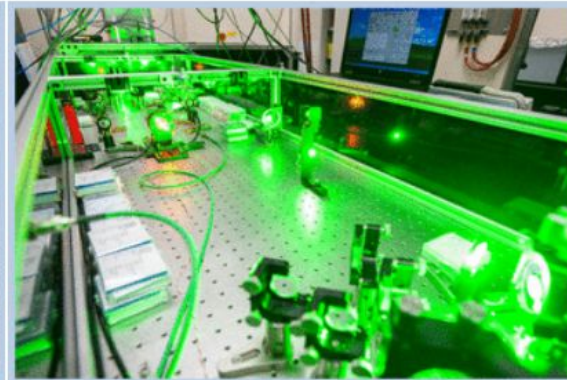

10TW Ti-Sapphire laser in FACET

FACET and Test Beam Facilities

SLAC National Accelerator Laboratory's accelerator test facilities - **FACET, NLCTA, ESTB & ASTA** - are powerful tools for accomplishing great science. These four facilities span a range of beam energies and capabilities, providing a unique opportunity for researchers to find a beam perfectly matched to their experimental needs. For more information contact: [Vitaly Yakimenko, FACET & TF Division Director](#)

FACET (Facility for Advanced Accelerator Experimental Tests):




Announcements

- FACET & TF User Meeting
September 2014
- Fifth SAREC Review
(September 2014)




Contacts

- Carsten Hast, Test Facilities
Department Head
- FACET Science - Mark Hoger


FACET

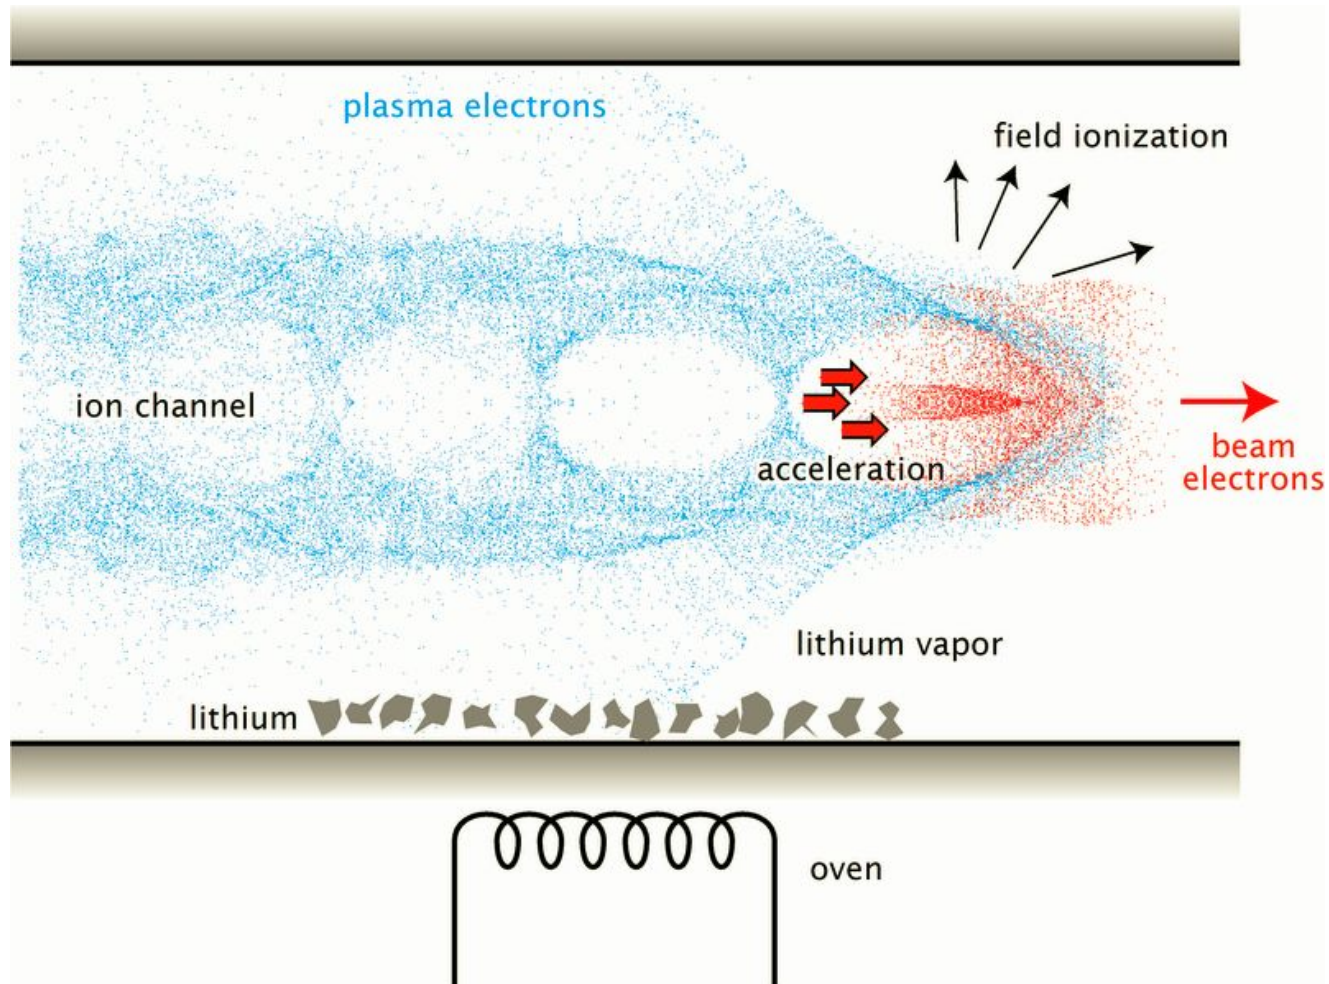


FACET-II

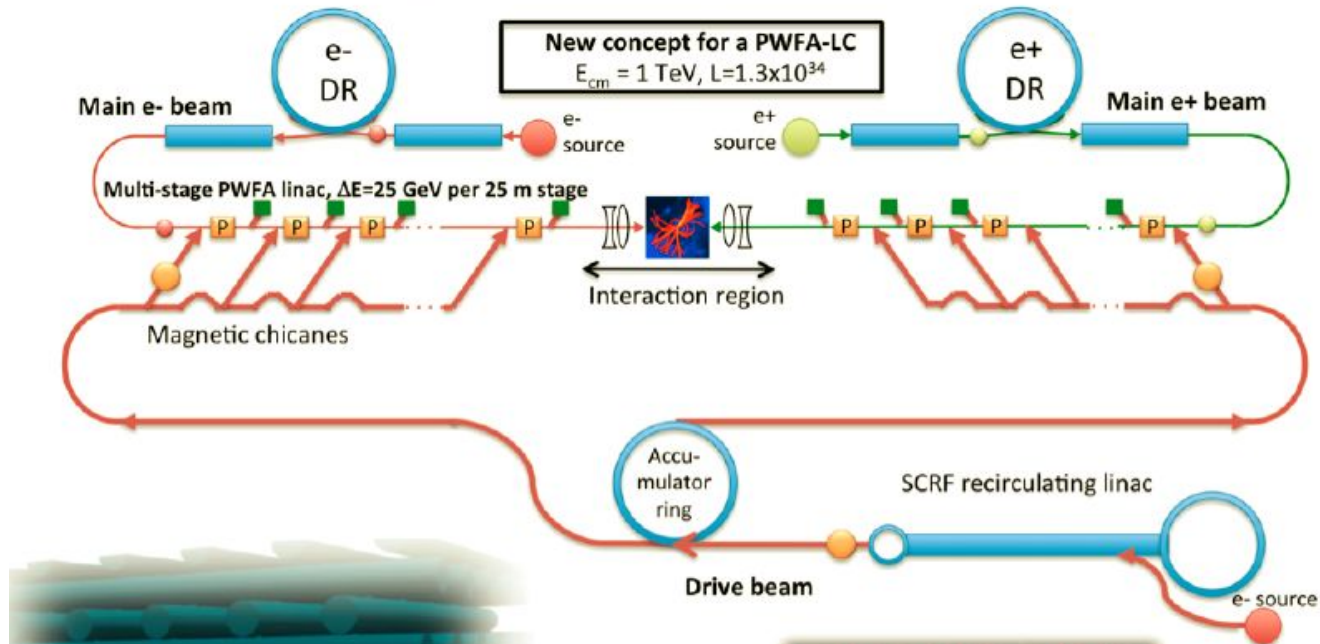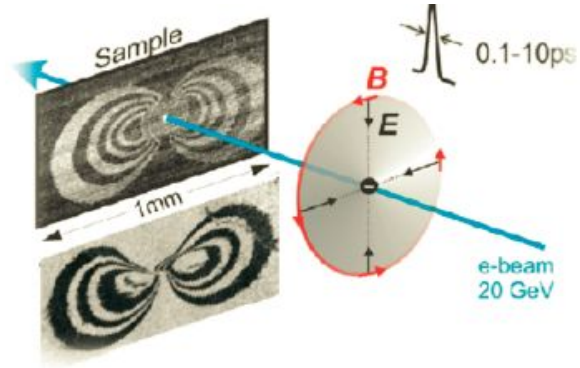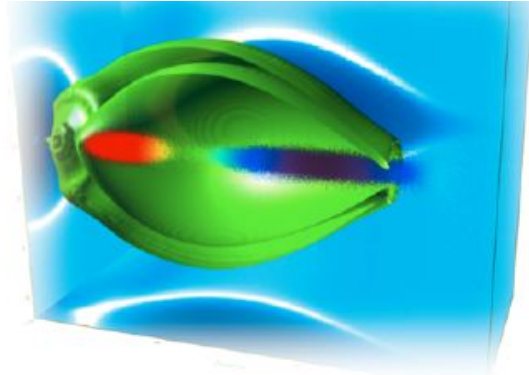

Record Acceleration: 42 GeV

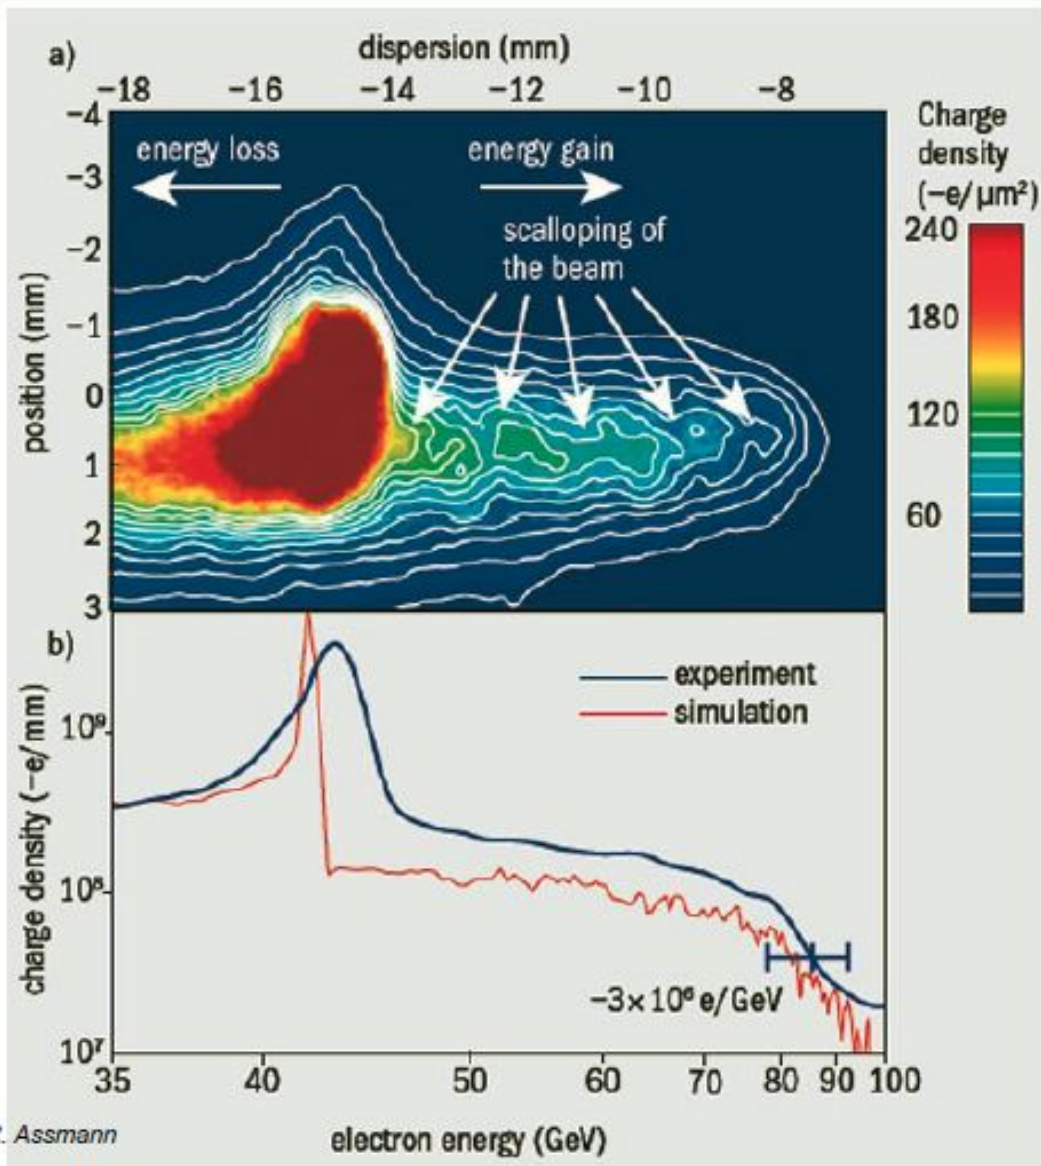

R. Assmann

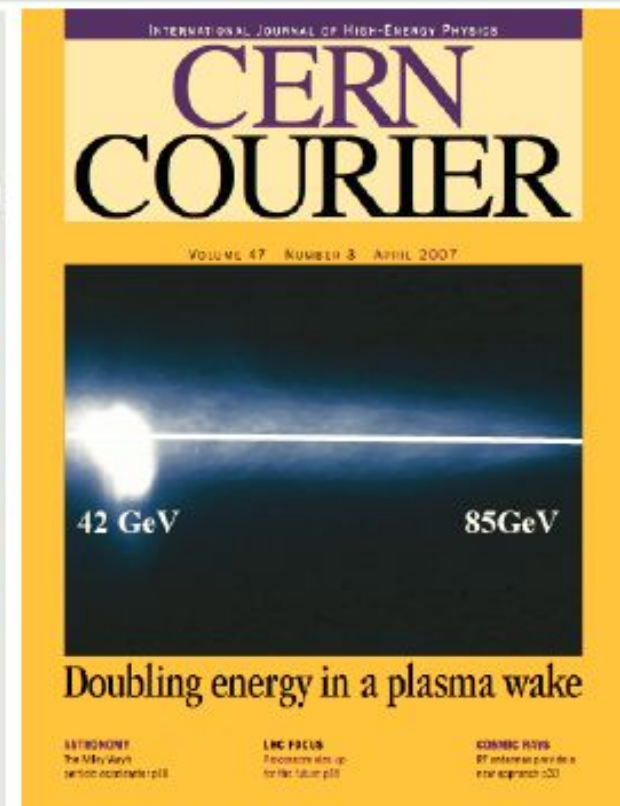


E167 collaboration
SLAC, UCLA, USC

I. Blumenfeld et al, Nature 445,
p. 741 (2007)

CERN:

AWAKE


<http://awake.web.cern.ch/awake/>

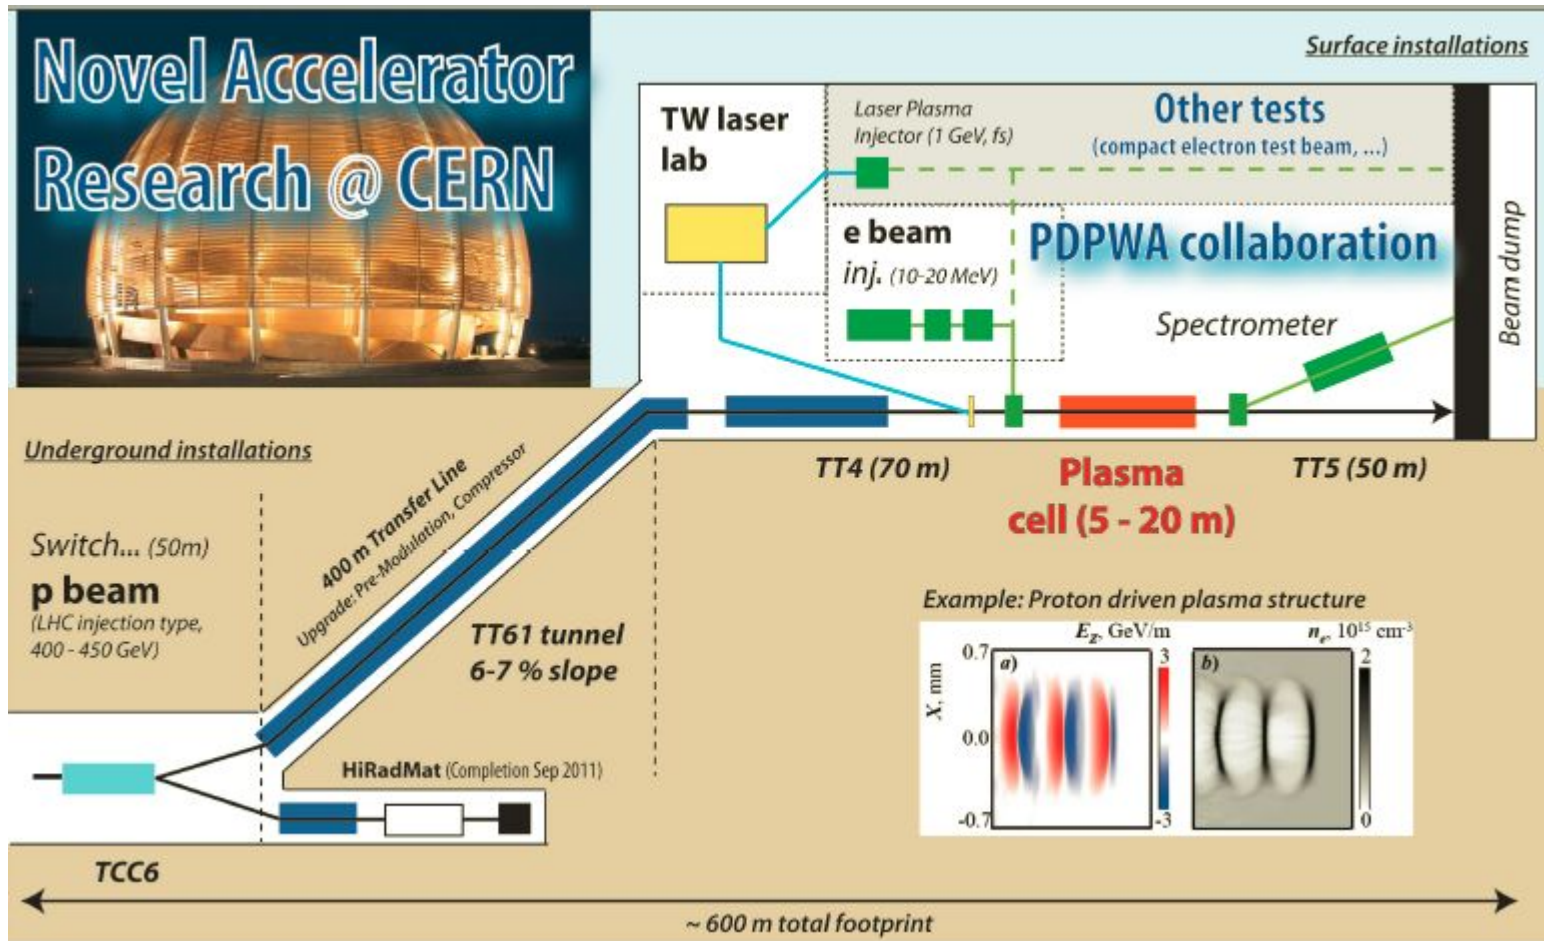

CERN:

AWAKE

<http://awake.web.cern.ch/awake/>

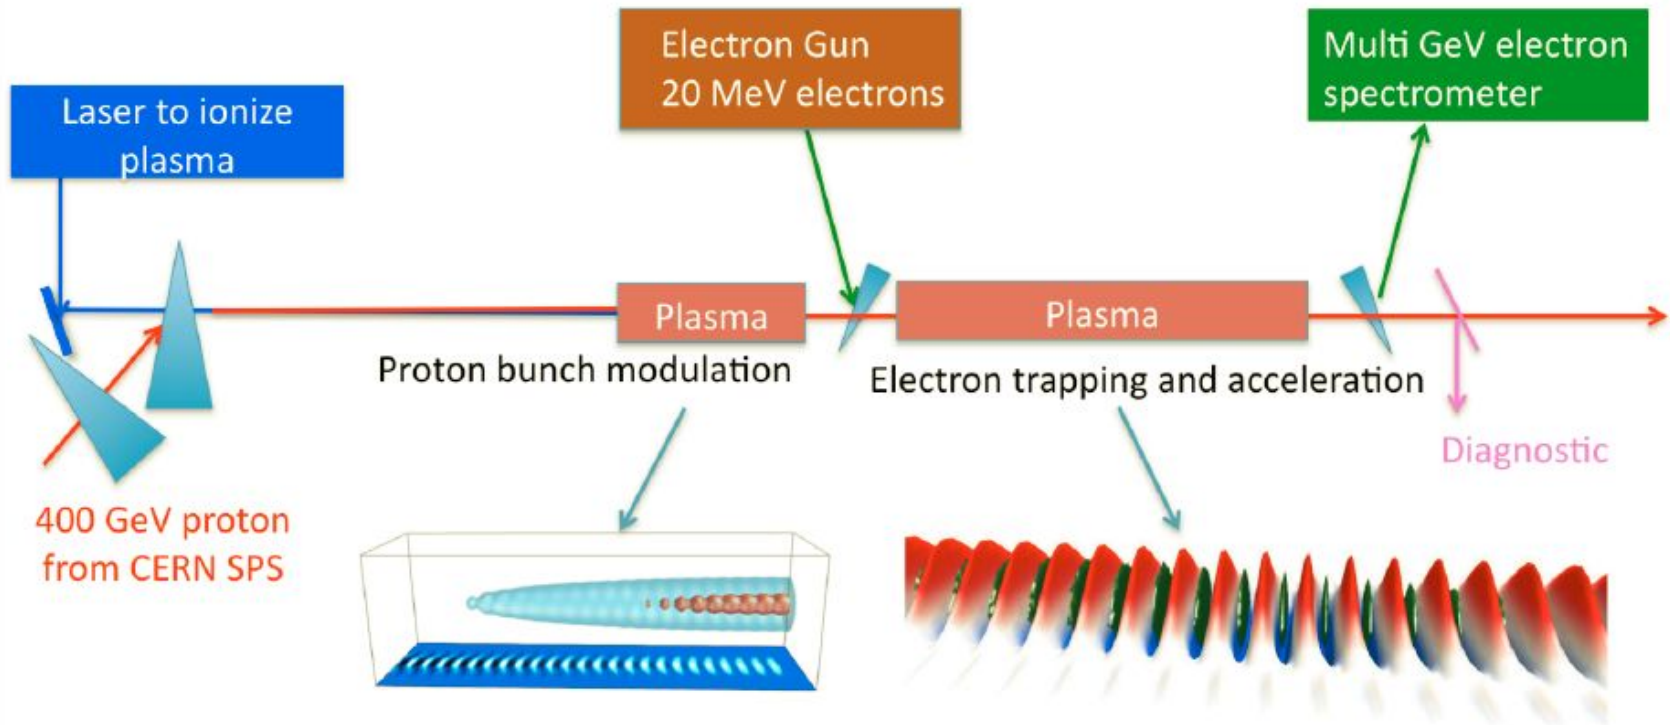

LAOLA

DESY & Uni Hamburg

<http://laola.desy.de/>

20 МЛН.
€вро



[ACCELERATORS](#) | [PHOTON SCIENCE](#) | [PARTICLE PHYSICS](#)

Deutsches Elektronen-Synchrotron
A Research Centre of the Helmholtz Association

Google™ Custom Search

[DESY HOME](#) | [RESEARCH](#) | [NEWS](#) | [ABOUT DESY](#) | [CONTACT](#)

LAOLA

Laboratory for Laser- and beam-driven plasma Acceleration



[HOME](#)

Home /

[PROJECTS](#)

Laboratory for Laser- and beam-driven plasma Acceleration

[CONTACT](#)

[OPEN POSITIONS](#)

[PUBLICATIONS](#)

[INTERNAL](#)

LAOLA, the **L**aboratory for **L**aser- and beam-driven plasma **A**cceleration is a collaboration between groups from **DESY** and the **University of Hamburg**. Its **mission** is to complement basic research in the relatively new field of plasma wakefield acceleration (PWA) by an explicit combination with DESY's conventional, modern accelerators.

Plasma Wakefield Accelerators attract great interest from accelerator and applied physics due to their unprecedented ultra-high field gradients on the order of TV/m as well as their

Links

- » [PITZ](#)
- » [REGAE](#)
- » [FLA](#)
- » [ARD](#)
- » [PIER](#)
- » [Contact](#)

Central LC Parameters (Selected)

Parameter	Conventional LC	Plasma LC
Beam energy	1.5 TeV	1.5 TeV
<i>Acc. gradient</i>	100 MV/m	> 1 GV/m
<i>Linac RF length</i>	15 km	< 1.5 km
Luminosity	$10^{35} \text{ cm}^{-2} \text{ s}^{-1}$	$10^{35} \text{ cm}^{-2} \text{ s}^{-1}$
<i>Beam sizes at IP</i>	~ nm	~nm
<i>Beam power</i>	15 MW	15 MW
<i>Site power</i>	200 MW	200 MW


A plasma linear collider helps achieving high energy by reducing the linac length!
Other parameters remain challenging (consequence of required luminosity).



Conceptual LPA Collider

Slide C.B. Schroeder

- Based on 10 GeV modules ($n \sim 10^{17} \text{ cm}^{-3}$)
- Quasi-linear wake: e^- and e^+ , wake control
- Staging & coupling modules

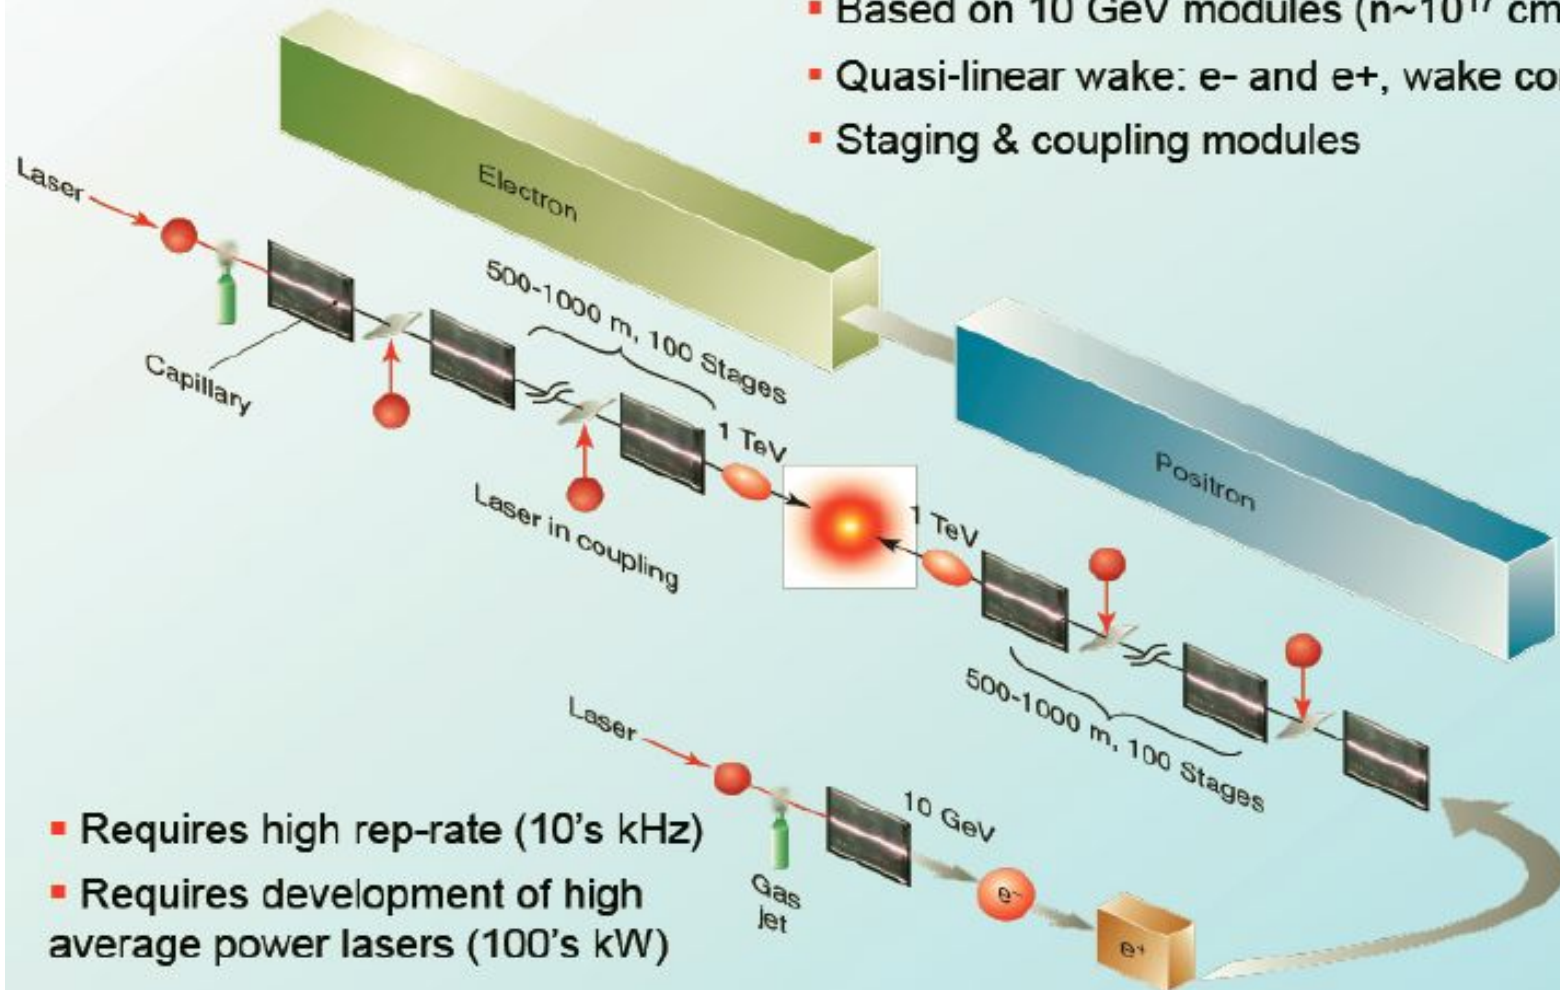

- Requires high rep-rate (10's kHz)
- Requires development of high average power lasers (100's kW)

Висновки

1. Обмеження стандартних методів прискорення заряджених частинок
2. Основи кільватерного методу лазерного прискорення
3. Використання потужних лазерів та пучків заряджених частинок (електронів, протонів) для формування «бульбашкових» зон у плазмі.
4. Останні досягнення в області плазмового прискорення і найбільші проекти дослідження методів і інструментів для кільватерного прискорення в плазмі