


Ad-Hoc wireless networks

- A network of devices without any centralized access point or existing infrastructure
 - A network of laptops, cellular phones, PDAs, printers
 - WSNs

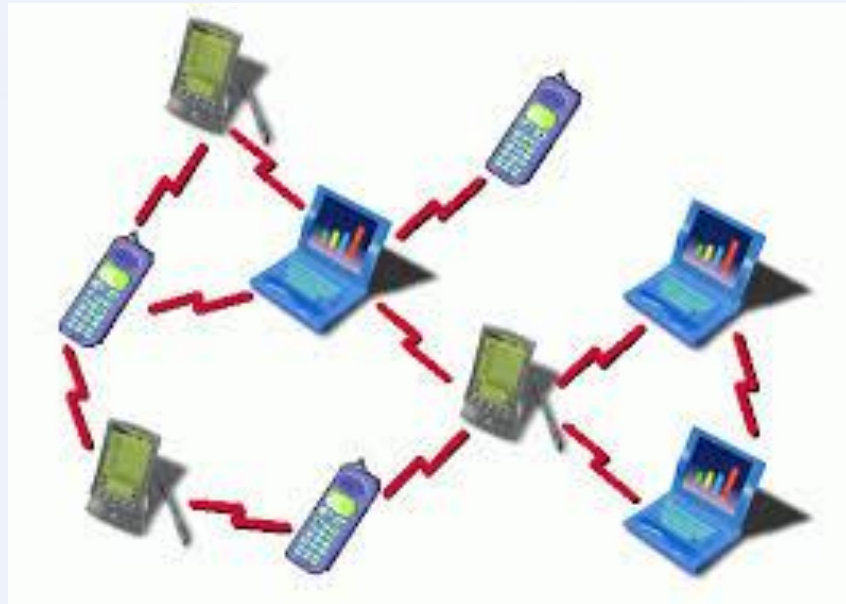

Routing protocols for Ad Hoc wireless networks

- The properties of the ad-hoc network routing protocol
 - Simple
 - Less storage space
 - Loop free
 - Short control message (Low overhead)
 - Less power consumption
 - Multiple disjoint routes
 - Fast rerouting mechanism

Routing protocols for Ad Hoc wireless networks


- Based on the routing information update mechanism, protocols can be classified into three:
 - 1) Proactive (table-driven) routing protocols
 - 2) Reactive (on-demand) routing protocol
 - 3) Hybrid routing protocols

Routing protocols for Ad Hoc wireless networks

Proactive or table-driven	Reactive or on-demand	Hybrid
<p data-bbox="92 508 620 661">Information about the network topology in each node</p> <ul data-bbox="92 786 606 1053" style="list-style-type: none"><li data-bbox="92 786 562 833">• periodic exchanges<li data-bbox="92 843 548 939">• information usually flooded<li data-bbox="92 949 606 1053">• path finding based on local information	<p data-bbox="705 508 1263 661">Information about the network topology obtained when required</p> <ul data-bbox="705 786 1263 1001" style="list-style-type: none"><li data-bbox="705 786 1263 891">• information acquired by connection processes<li data-bbox="705 901 1219 1001">• path finding based on acquired information	<p data-bbox="1311 508 1818 661">Merge the two schemes according to the topology</p> <ul data-bbox="1311 786 1818 1058" style="list-style-type: none"><li data-bbox="1311 786 1721 943">• nodes within a region may use proactive routing<li data-bbox="1311 953 1818 1058">• other nodes may use reactive routing

The Basics - Flooding


- Simplest of all routing protocols
- Send all info to everybody
 - If data not for you, send to all neighbors
- Robust
 - destination is *almost* guaranteed to receive data
- Resource Intensive
 - unnecessary traffic
 - load increases, network performance drops quickly

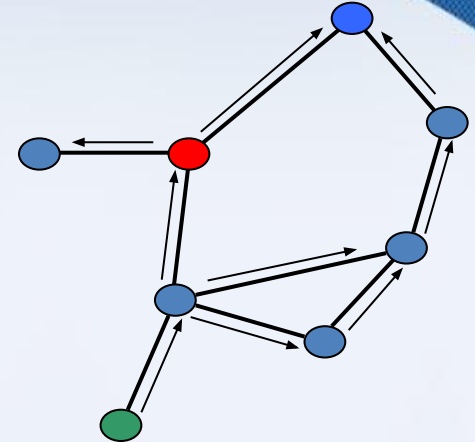

The Basic- Link State routing

- Like the shortest-path computation method
- Each node maintains a view of the network topology with a cost for each link
- Periodically broadcast link costs to its outgoing links to all other nodes such as flooding


The Basic- Link State routing

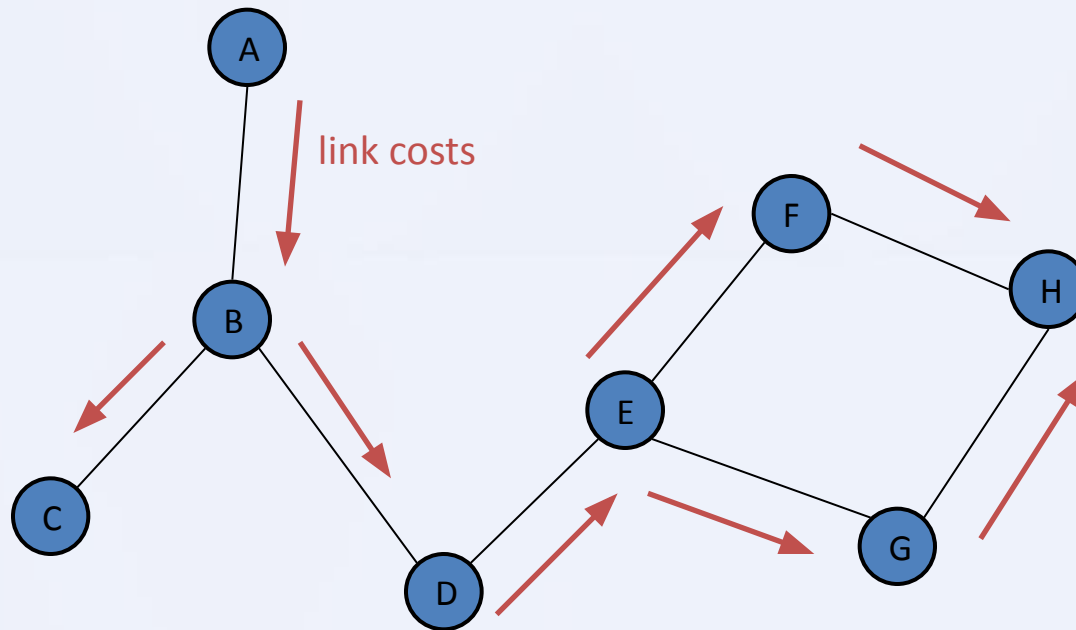

The Basic- Distance Vector Routing

- Known also as Distributed Bellman-Ford or RIP (Routing Information Protocol)
- Every node maintains a routing table
 - all available destinations
 - the next node to reach to destination
 - the number of hops to reach the destination
- Periodically send table to all neighbors to maintain topology

The Basic- Distance Vector (Tables)



Dest.	Next	Metric	...
A	A	0	
B	B	1	
C	B	3	

Dest.	Next	Metric	...
A	A	1	
B	B	0	
C	C	2	

Dest.	Next	Metric	...
A	B	3	
B	B	2	
C	C	0	


Distance Vector (Update)

Routing table is updated

B broadcasts the new routing information to his neighbors

(A, 1)
(B, 0)
(C, 1)

(A, 1)
(B, 0)
(C, 1)




Dest.	Next	Metric	...
A	A	0	
B	B	1	
C	B	3 2	


Dest.	Next	Metric	...
A	A	1	
B	B	0	
C	C	1	

Dest.	Next	Metric	...
A	B	3 2	
B	B	1	
C	C	0	


Distance Vector (New Node)

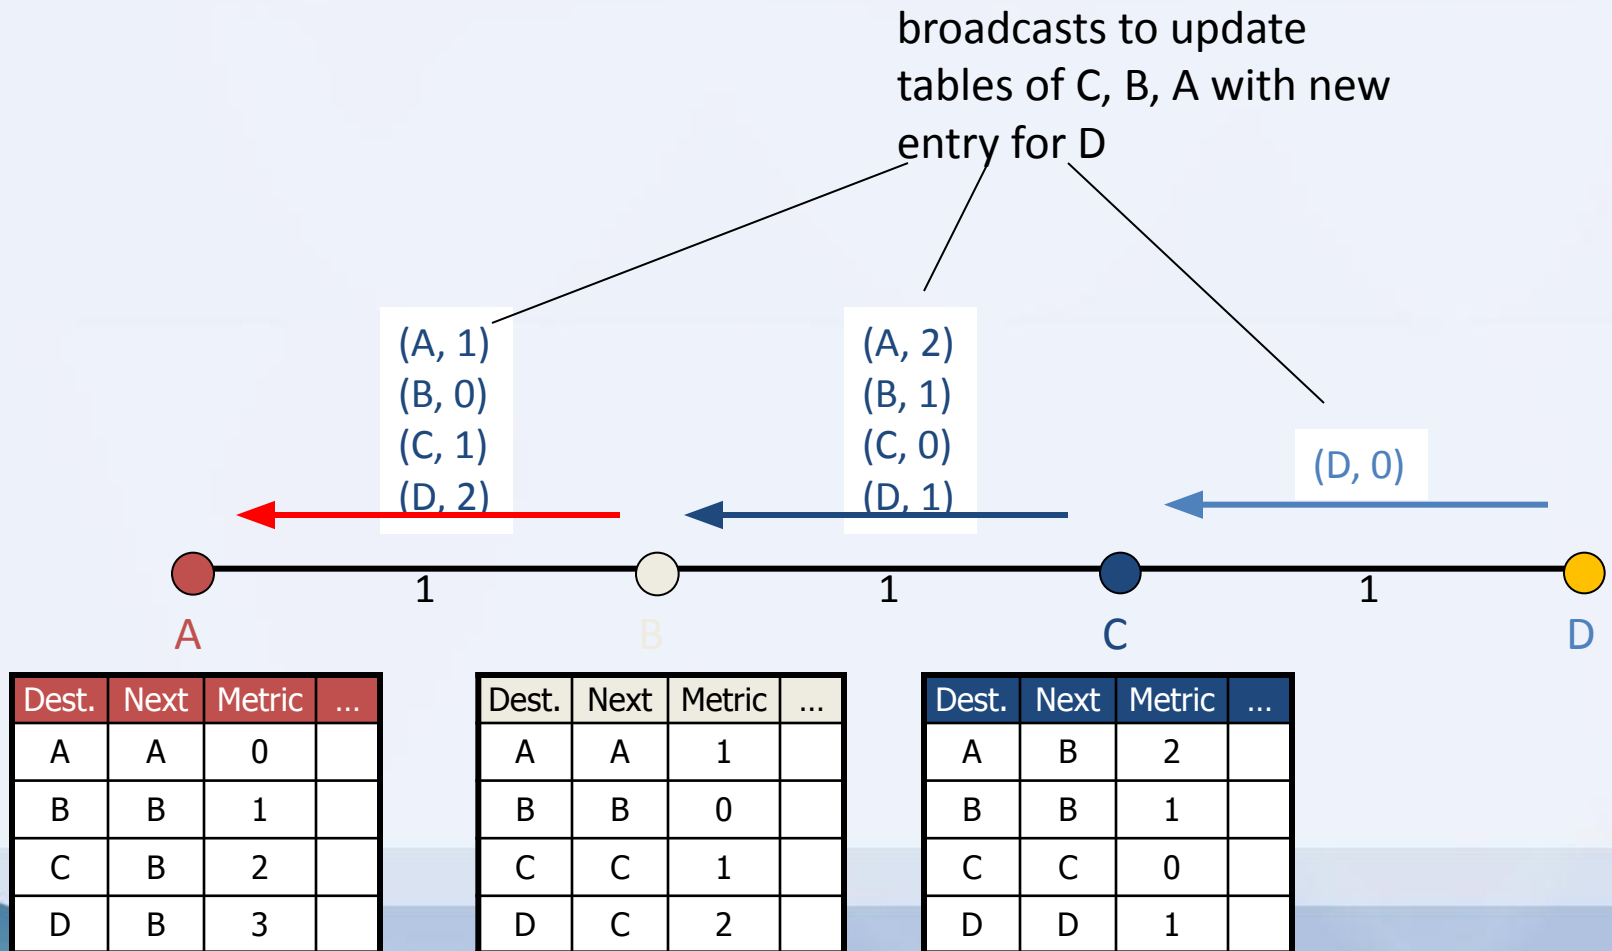


Distance Vector (Broken Link)

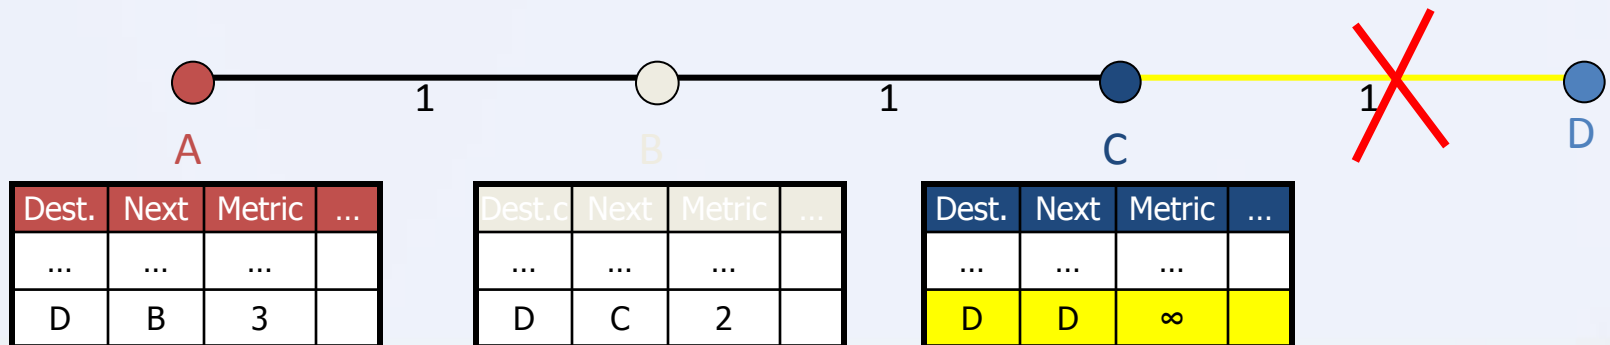

Distance Vector (Loops)

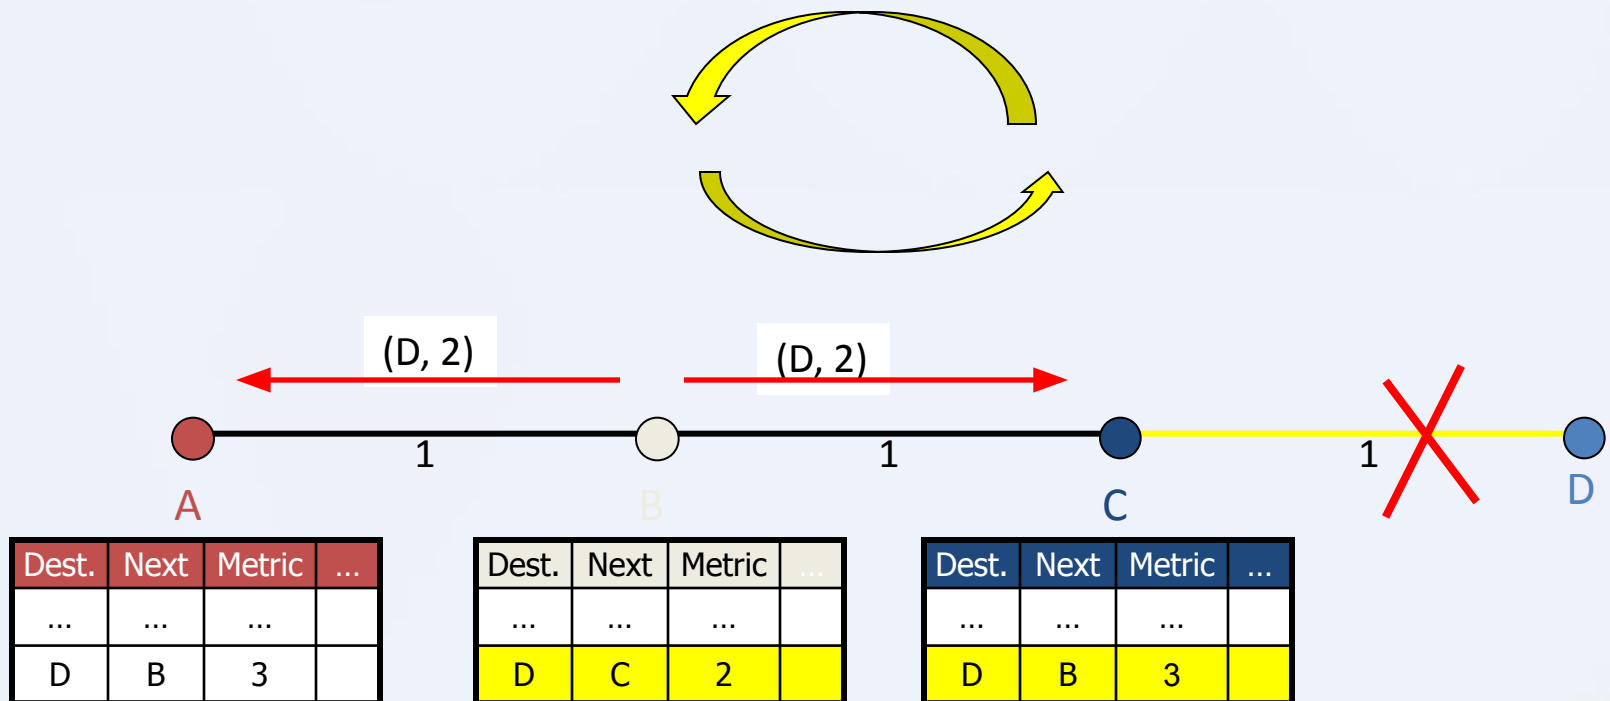

Distance Vector (Count to Infinity)

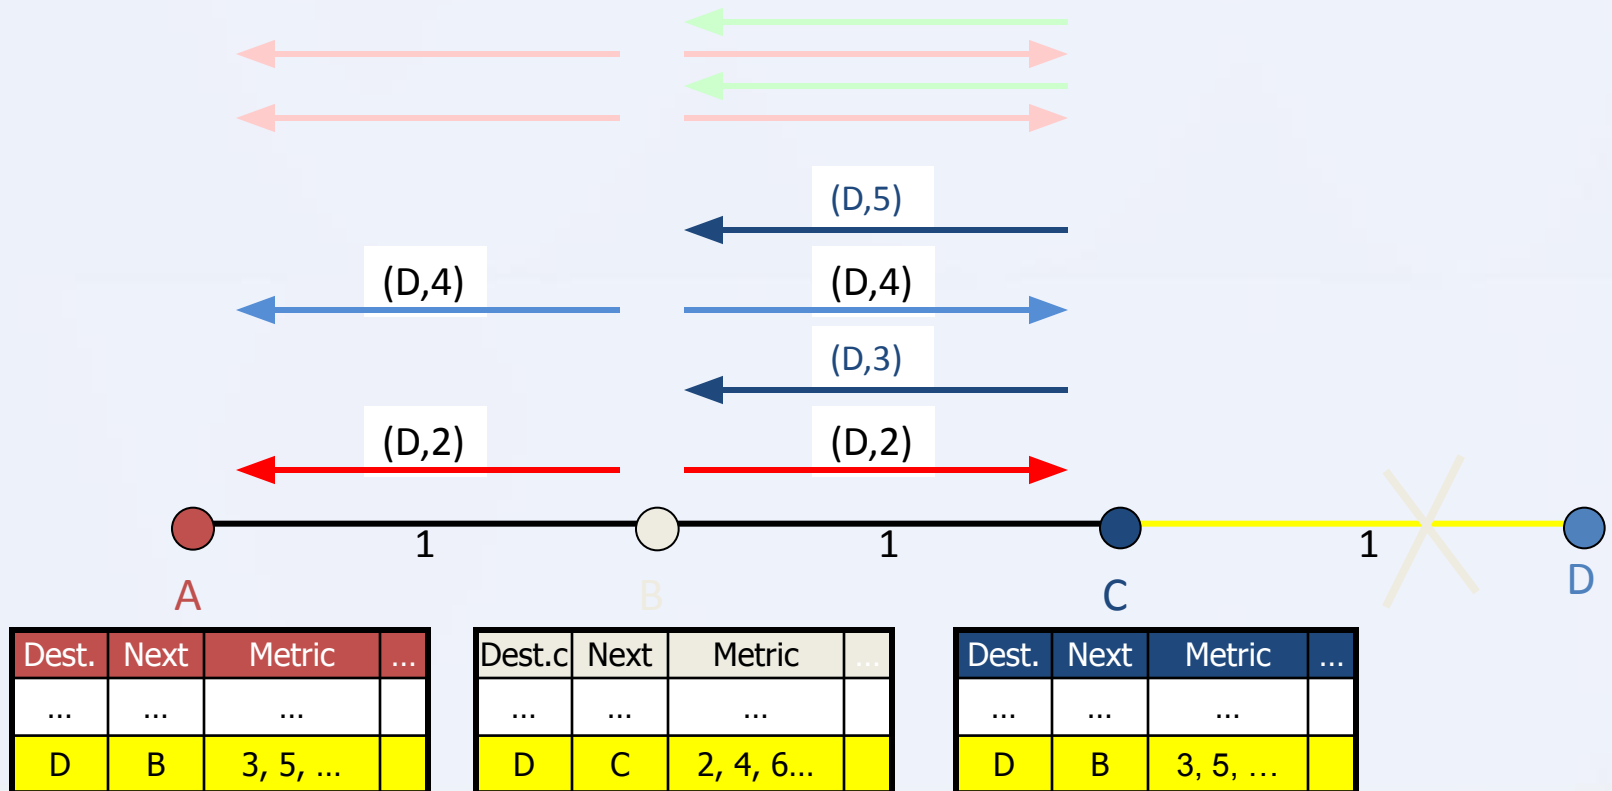

Distance Vector

- DV not suited for ad-hoc networks!
 - Loops
 - Count to Infinity
- New Solution -> DSDV Protocol

DSDV Protocol

- DSDV is Proactive (Table Driven)
 - Each node maintains routing information for all known destinations
 - Routing information must be updated periodically
 - Traffic overhead even if there is no change in network topology
 - Maintains routes which are never used

DSDV Protocol

- Keep the simplicity of Distance Vector
- *Guarantee Loop Freeness*
 - New Table Entry for Destination Sequence Number
- Allow fast reaction to topology changes
 - Make immediate route advertisement on significant changes in routing table

DSDV (Table Entries)

Destination	Next	Metric	Seq. Nr	Install Time	Stable Data
A	A	0	A-550	001000	Ptr_A
B	B	1	B-102	001200	Ptr_B
C	B	3	C-588	001200	Ptr_C
D	B	4	D-312	001200	Ptr_D

- **Sequence number** originated from destination. Ensures loop freeness.
- **Install Time** when entry was made (used to delete stale entries from table)
- **Stable Data** Pointer to a table holding information on how stable a route is. Used to damp fluctuations in network.


DSDV (Route Advertisements)

- Advertise to each neighbor own routing information
 - Destination Address
 - Metric = Number of Hops to Destination
 - Destination Sequence Number
- Rules to set sequence number information
 - On each advertisement increase own destination sequence number (use only *even numbers*)
 - If a node is no more reachable (timeout) increase sequence number of this node by 1 (*odd sequence number*) and set metric = ∞

DSDV (Route Selection)

- Update information is compared to own routing table
 1. Select route with higher destination sequence number (This ensure to use always newest information from destination)
 2. Select the route with better metric when sequence numbers are equal.

DSDV (Tables)




Dest.	Next	Metric	Seq
A	A	0	A-550
B	B	1	B-100
C	B	3	C-586

Dest.	Next	Metric	Seq
A	A	1	A-550
B	B	0	B-100
C	C	2	C-588

Dest.	Next	Metric	Seq.
A	B	1	A-550
B	B	2	B-100
C	C	0	C-588

DSDV (Route Advertisement)

B increases Seq.Nr from 100 -> 102
 B broadcasts routing information
 to Neighbors A, C including destination
 sequence numbers

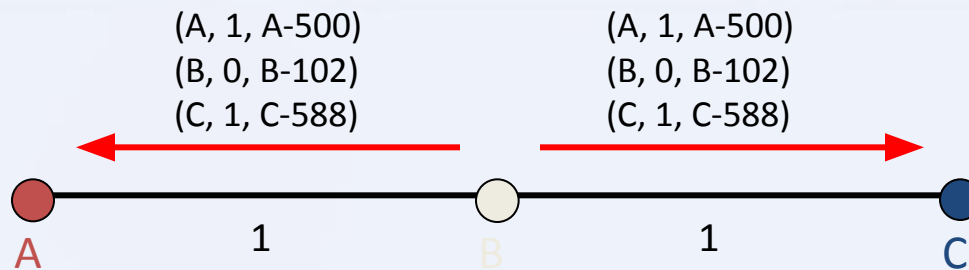

Dest.	Next	Metric	Seq
A	A	0	A-550
B	B	1	B-102
C	B	2	C-588

Dest.	Next	Metric	Seq
A	A	1	A-550
B	B	0	B-102
C	C	1	C-588

Dest.	Next	Metric	Seq.
A	B	2	A-550
B	B	1	B-102
C	C	0	C-588


DSDV (Respond to Topology Changes)

- Immediate advertisements
 - Information on new Routes, broken Links, metric change is immediately propagated to neighbors.
- Full/Incremental Update:
 - Full Update: Send all routing information from own table.
 - Incremental Update: Send only entries that has changed. (Make it fit into one single packet)

DSDV (New Node)

2. Insert entry for D with sequence number D-000
Then immediately broadcast own table

1. D broadcast for first time
Send Sequence number D-000

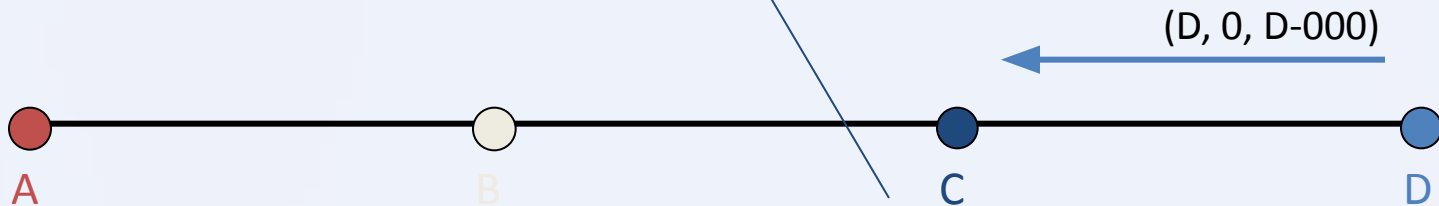

Dest.	Next	Metric	Seq.
A	A	0	A-550
B	B	1	B-104
C	B	2	C-590

Dest.	Next	Metric	Seq.
A	A	1	A-550
B	B	0	B-104
C	C	1	C-590

Dest.	Next	Metric	Seq.
A	B	2	A-550
B	B	1	B-104
C	C	0	C-590
D	D	1	D-000


DSDV (New Node cont.)

4. B gets this new information and updates its table.....

3. C increases its sequence number to C-592 then broadcasts its new table.

(A, 2, A-550)
 (B, 1, B-102)
 (C, 0, C-592)
 (D, 1, D-000)

(A, 2, A-550)
 (B, 1, B-102)
 (C, 0, C-592)
 (D, 1, D-000)

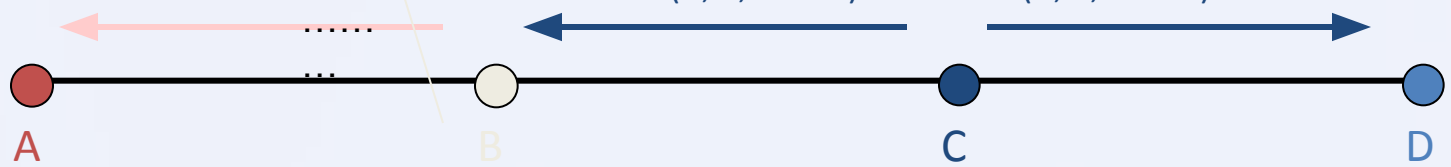

Dest.	Next	Metric	Seq.
A	A	0	A-550
B	B	1	B-104
C	B	2	C-590

Dest.	Next	Metric	Seq.
A	A	1	A-550
B	B	0	B-102
C	C	1	C-592
D	C	2	D-000

Dest.	Next	Metric	Seq.
A	B	2	A-550
B	B	1	B-102
C	C	0	C-592
D	D	1	D-000


DSDV (no loops, no count to infinity)

2. B does its broadcast


-> no affect on C (C knows that B has stale information because C has higher seq. number for destination D)

-> no loop -> no count to infinity

1. Node C detects broken Link:
-> Increase Seq. Nr. by 1
(only case where not the destination sets the sequence number -> odd number)

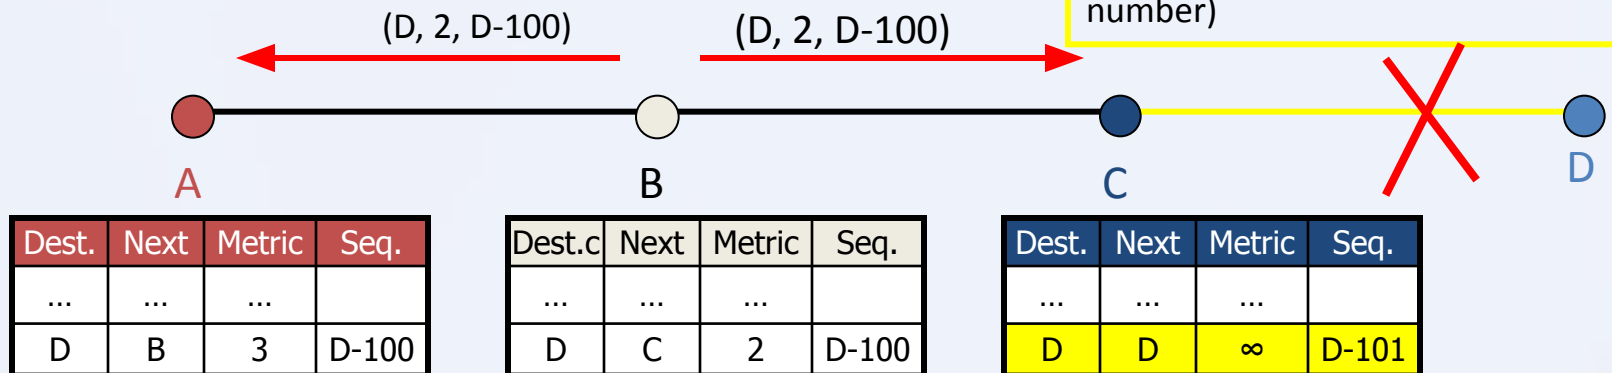


DSDV (Immediate Advertisement)

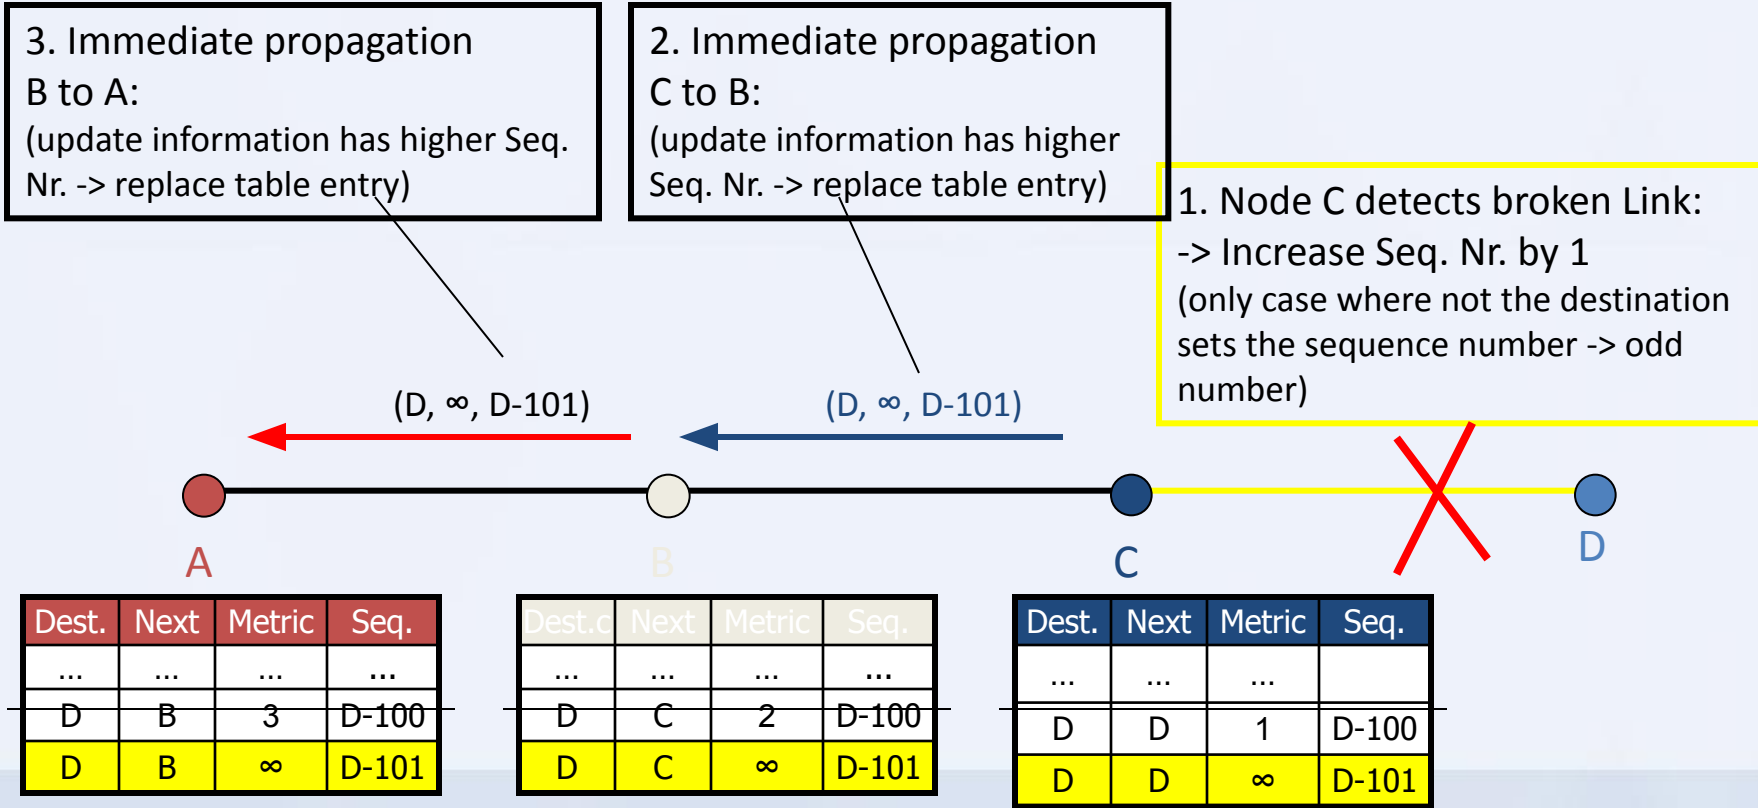

Link State Routing

- Each node periodically floods status of its links
- Each node re-broadcasts link state information received from its neighbour
- Each node keeps track of link state information received from other nodes
- Each node uses above information to determine next hope to each destination

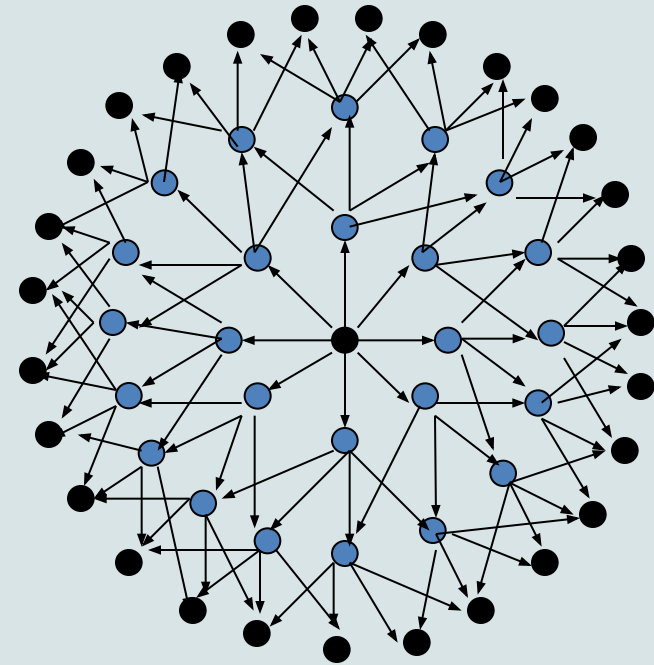


24 retransmissions to diffuse
a message up to 3 hops

Optimized Link state routing (OLSR)


- Proactive protocol based on link state routing
 - overhead of flooding link state packets is reduced by requiring fewer nodes to forward the information to all the nodes
 - a broadcast from node X is only forwarded by its **multipoint relays**
 - very efficient in highly dense networks → less packets with state information

Optimized Link state routing (OLSR)

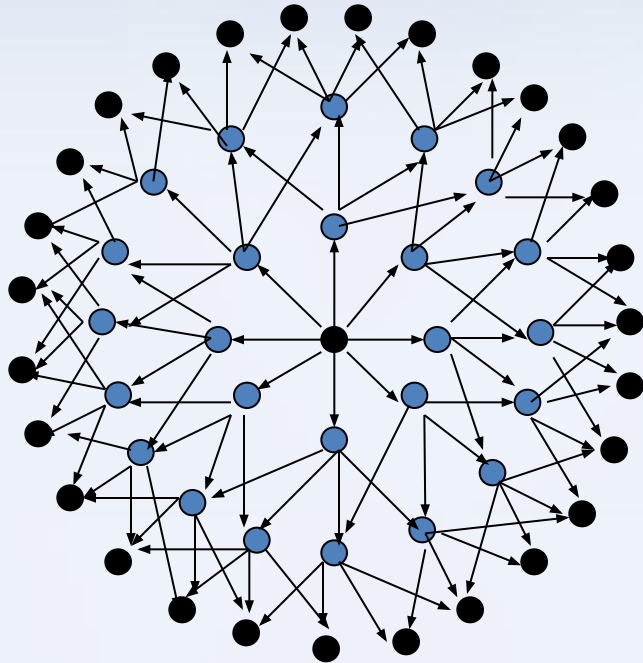

24 retransmissions to diffuse a message up to 3 hops!

● Retransmission node

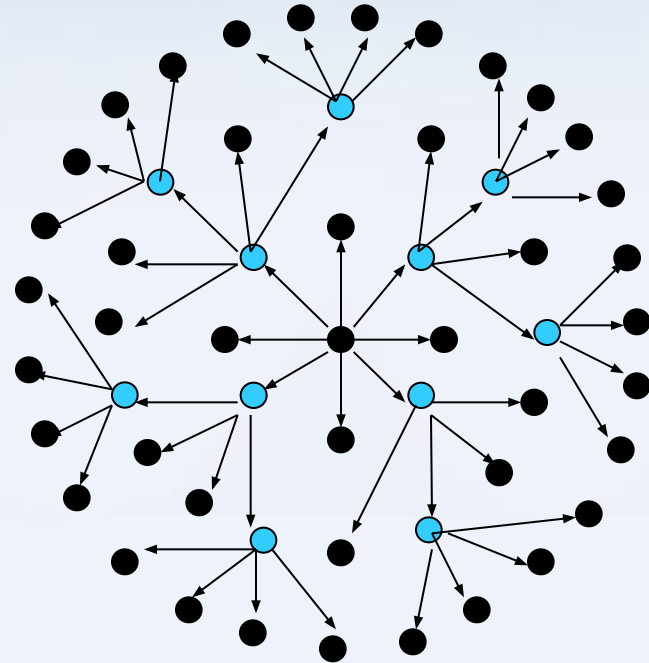

11 retransmission to diffuse a message up to 3 hops!

● Retransmission node

Selecting Multipoint relays

- Heuristic approaches to select the *MPRSet*
 - minimum set of one-hop neighbors through which all nodes in the two-hop neighborhood can be reached

$MPRSet(x) \leftarrow \emptyset$

$\mathcal{N}_1(x)$ - one-hop neighborhood of x

$\mathcal{N}_2(x)$ - two-hop neighborhood of x

$MPRSet(x) \leftarrow \{\text{nodes that belong to } \mathcal{N}_1(x) \text{ and which are the only neighbors of nodes in } \mathcal{N}_2(x)\}$

while there exist nodes in $\mathcal{N}_2(x)$ not covered by $MPRSet(x)$:

1. for each node in $\mathcal{N}_1(x)$ which is not in $MPRSet(x)$, compute the maximum no. of nodes it covers among the uncovered nodes in $\mathcal{N}_2(x)$

2. add to $MPRSet(x)$ the node in $\mathcal{N}_1(x)$ for which this number is maximum

Example

