


# Система диспетчеризации Plant Visor

The logo for Plant Visor features a stylized blue swoosh that forms a partial circle around the text. The text 'Pl@ntVisor' is written in a bold, black, sans-serif font, with the '@' symbol highlighted in blue.

**Pl@ntVisor**

# Основные возможности

- Удаленный доступ – мониторинг и управление
- Запись параметров по типу «черного ящика»
- Наглядное представление информации, построение графиков процесса

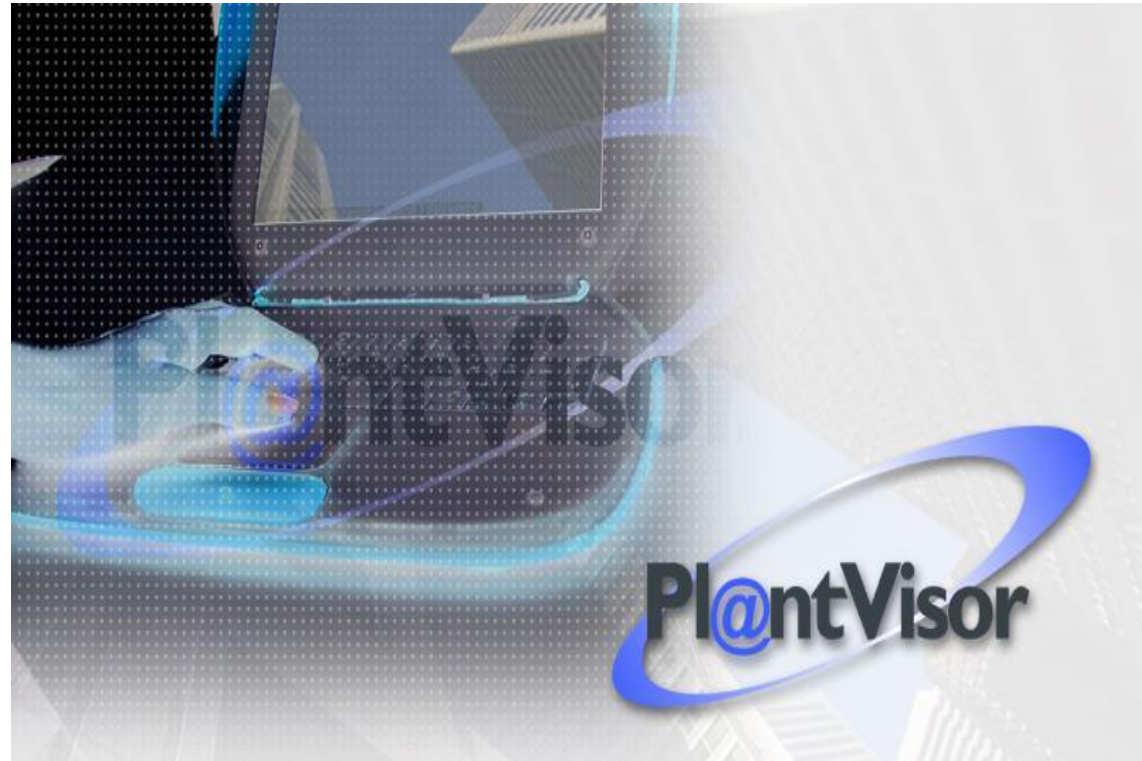

## Стандартные экраны:

The screenshot displays the PlantVisor web interface for a 'Meat Cabinet'. The browser address bar shows 'http://192.168.0.100/First.htm'. The page title is 'Supermarket #3 | Meat Cabinet'. A left-hand navigation menu includes: Units Table, Alarms/Events, Report, Backup, Settings, Logout, and Help. The main content area is titled 'Meat Cabinet' and features a digital display image showing '-4.2'. Below this are two large temperature readouts: '-18.3 Regulation Temperature' and '-22.3 Evaporator Temperature'. To the right is a 'Parameters' table with columns for value, code, and description. At the bottom right is an 'Active Alarms' table listing two recent alarms: 'alarm from digital input 1 (er3)' and 'high temperature alarm (er4)'. The bottom left corner shows 'Supermarket #3' and 'User: guest'. A footer bar contains icons for fan, light, and snowflake.

**Meat Cabinet**

Units Table  
Alarms/Events  
Report  
Backup  
Settings  
Logout  
Help

Supermarket #3  
User: guest

Value	Code	Description
-8.6	St1	Set point
5.7	P1	Differential (hysteresis of the regulator)
10.0	AL	Minimum temperature alarm This parameter allows the low temperature alarm to be selected. The value of AL indicate the maximum temperature deviation from the set point
10.0	AH	High temperature alarm It allows the high temperature alarm to be set. The value of AH indicate the maximum deviation allowed from the set point

04/02/02 17:45:07	alarm from digital input 1 (er3)
04/02/02 17:45:06	high temperature alarm (er4)

## Стандартные экраны:

Pl@ntVisor - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Media Print

Address http://127.0.0.1:82/First.htm

PlantVisor

unit1

Devices

Alarms/Events

Report

Service

Logout

Help

User: Administrator

Time	Value
0	0.5
1	0.6
2	0.4
3	0.5
4	0.3
5	0.4
6	0.7
7	0.5
8	0.4
9	0.5
10	0.4
11	0.5
12	0.4
13	0.5
14	0.4
15	0.5
16	0.4
17	0.5
18	0.4
19	0.5
20	0.4
21	0.5
22	0.4
23	0.5
24	0.4
25	0.5
26	0.4
27	0.5
28	0.4
29	0.5
30	0.4
31	0.5
32	0.4
33	0.5
34	0.4
35	0.5
36	0.4
37	0.5
38	0.4
39	0.5
40	0.4
41	0.5
42	0.4
43	0.5
44	0.4
45	0.5
46	0.4
47	0.5
48	0.4
49	0.5
50	0.4



## PlantVisor Enhanced для ЛОКАЛЬНЫХ РС



## PlantVisor Enhanced для УДАЛЕННЫХ РС

### PlantVisor Remote



Локальная сеть  
Офис




Internet  
Explorer 6



PlantVisor Local




PlantWatch

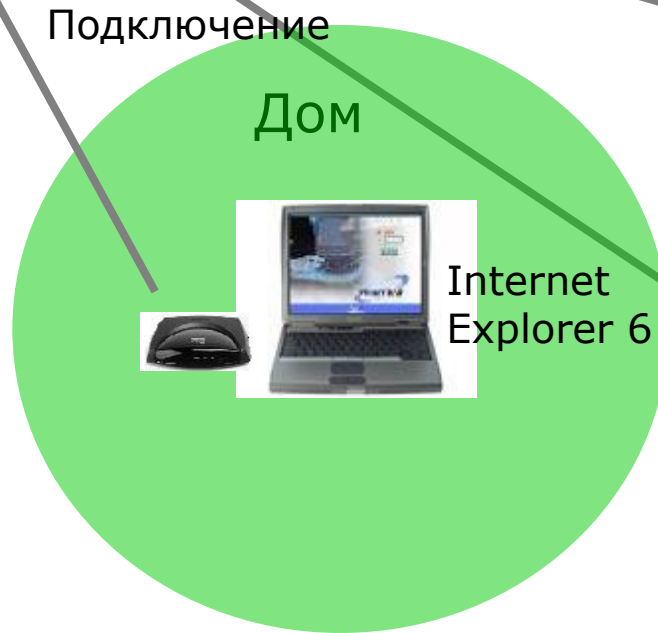

Контроллеры rCO

## Конвертор PC Gate

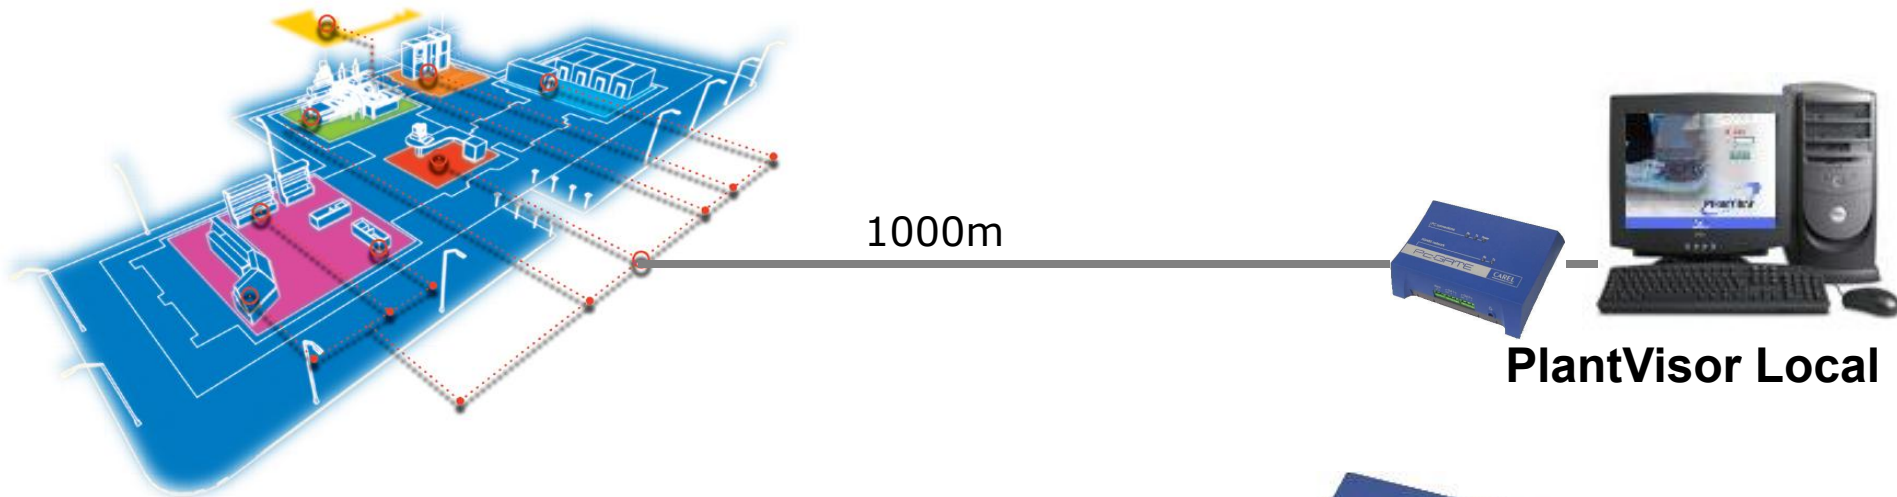

### CVSTD00000

PC Gate - новый конвертор со встроенным сторожевым таймером



# Конвертор PC Gate


## **CVSTD00000**

PC Gate имеет 2  
последовательных  
входа:

**RS232 и RS485**

и 2 выхода

**RS485**

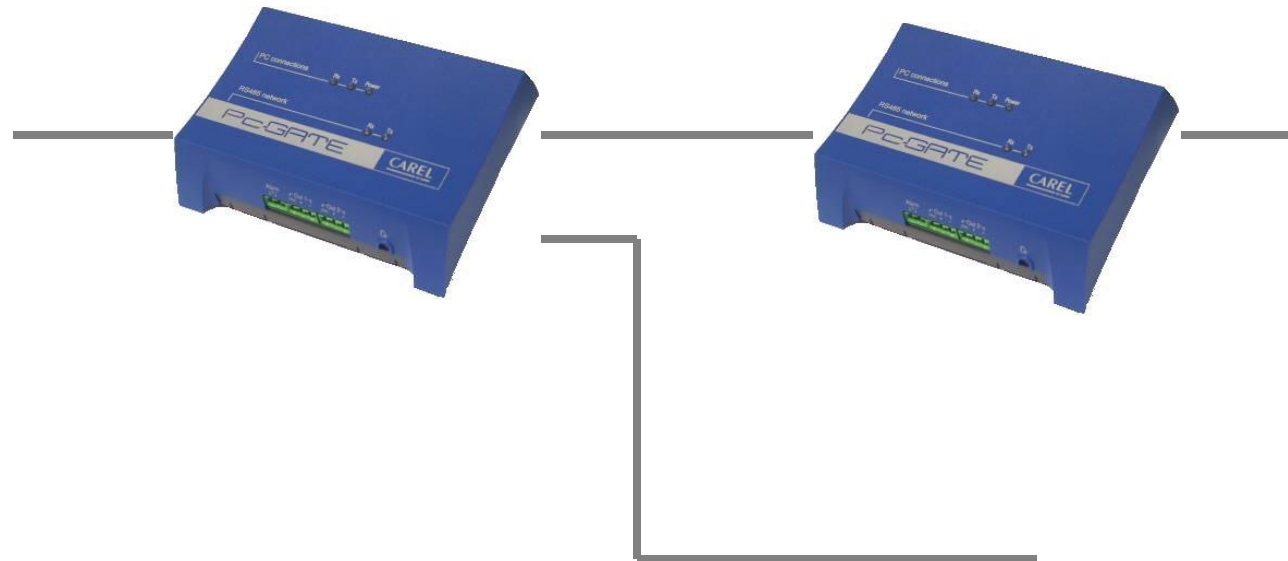




# Конвертор PC Gate

## Возможности:


- Преобразование RS232 к RS485.  
Максимальная скорость 19,200 кбит/с,  
Максимум 200 устройств
- Сторожевой таймер для соединения с компьютером для сигнализации отсутствия связи с системой диспетчеризации
- Усилитель/разветвитель RS485 – возможно подключение на расстояниях более 1000м
- Установка настольная или на DIN-рейку.

## Варианты включения конвертора


Только конвертор

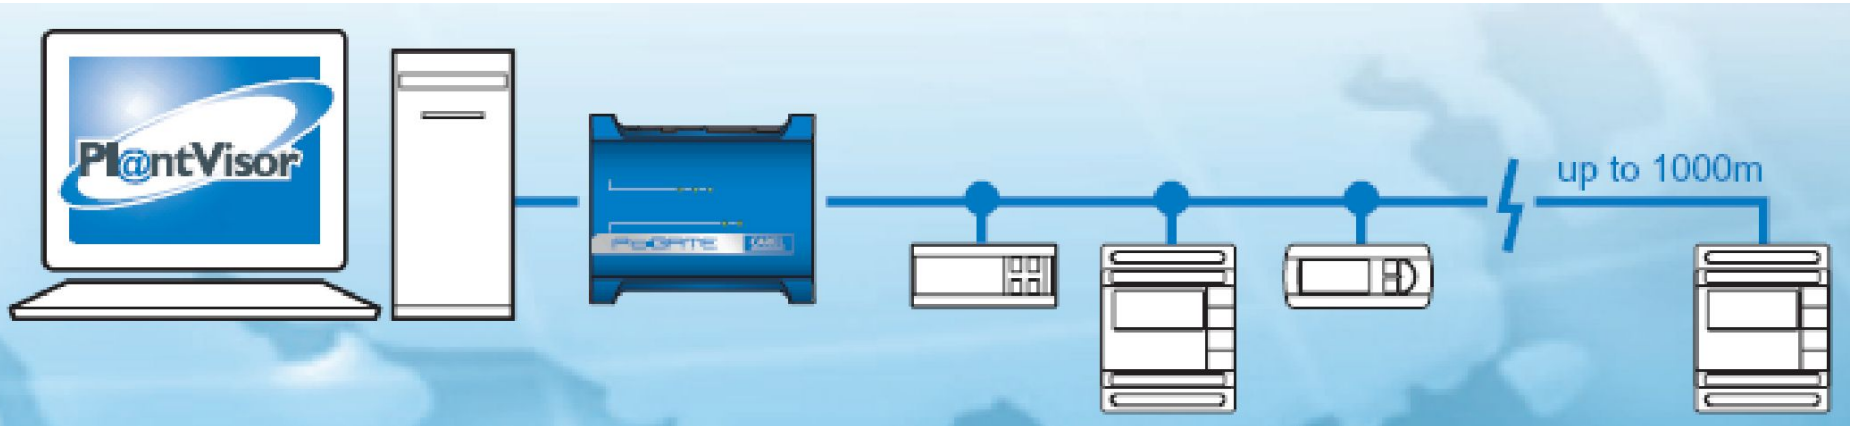

Конвертор, усилитель и разветвитель

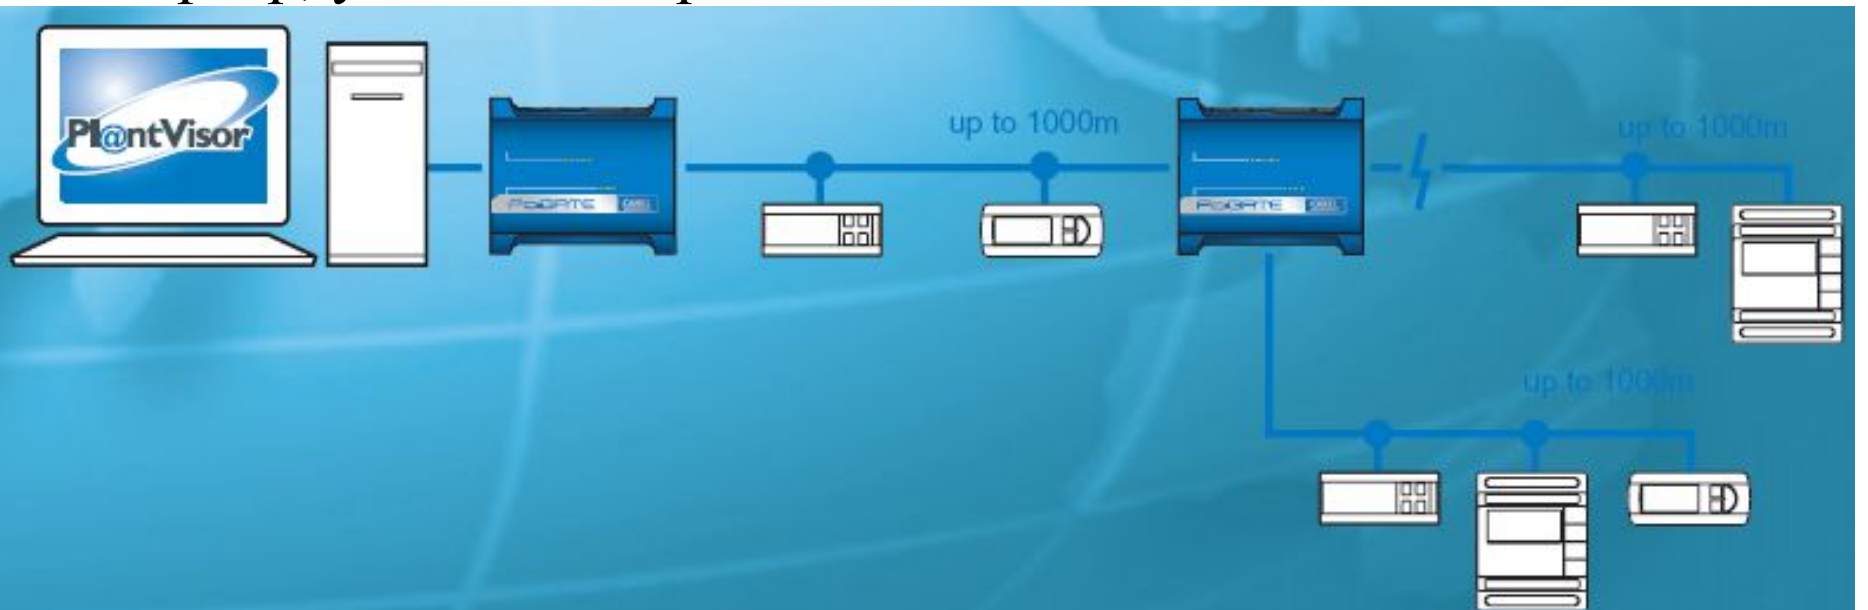

## Розничные цены на основные КОМПОНЕНТЫ

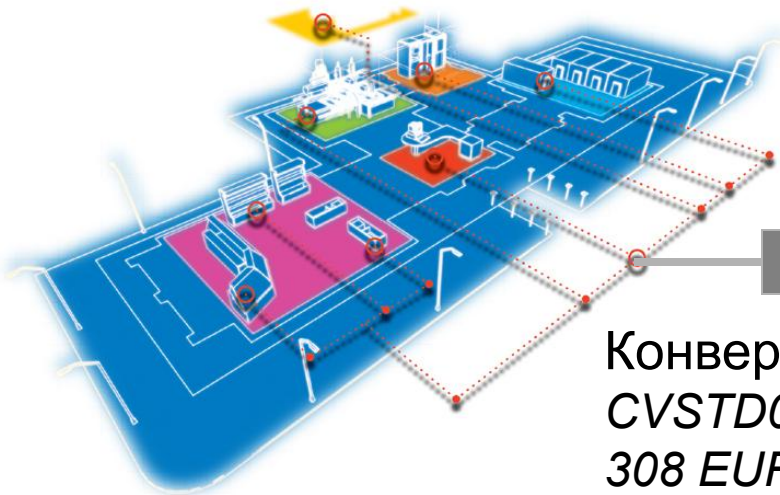

Конвертор  
*CVSTD00000*  
308 EURO

PlantVisor Local  
*PVSTDEBL00*  
2002 EURO



PlantVisor Remote  
*PVSTDEBR00*  
1386 EURO