

Plasma-chemical Technologies
(During Development)
Limited Liability Company
"R & D Center PLAZER"
Kiev

E-mail: plasma@svp.relc.com


Tel: +38 044 585 26 07

Fax: +38044 585 26 06


PLASMA – CATALYST OF COMBUSTION OF LOW-REACTIVE COALS

The plasma technology seems to hold the highest promise among the alternative technologies available for solving the problems of combustion of low-reactive coals. This technology provides a substantial increase in cost effectiveness and improvement in environmental indicators of power-generating plants working with solid fuel.

Plasmatron and its installation on a direct-flow coal torch

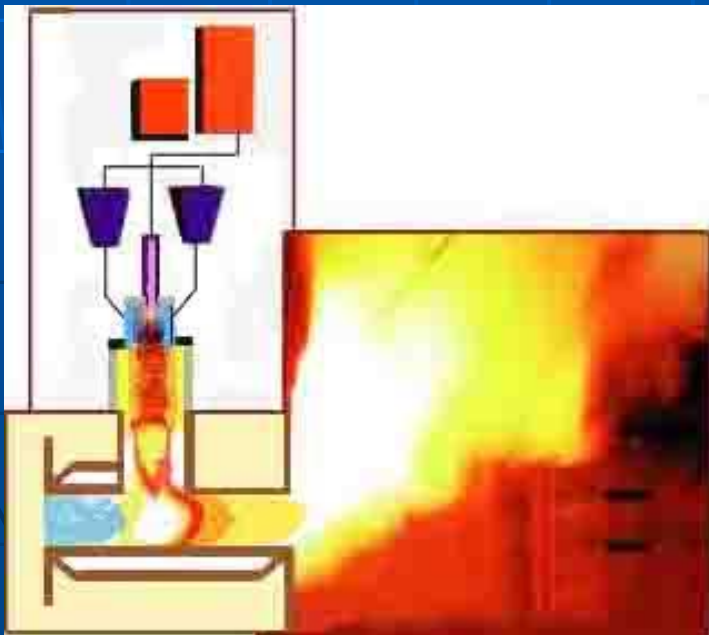


Decrease in formation NO_x and mechanical undercombustion

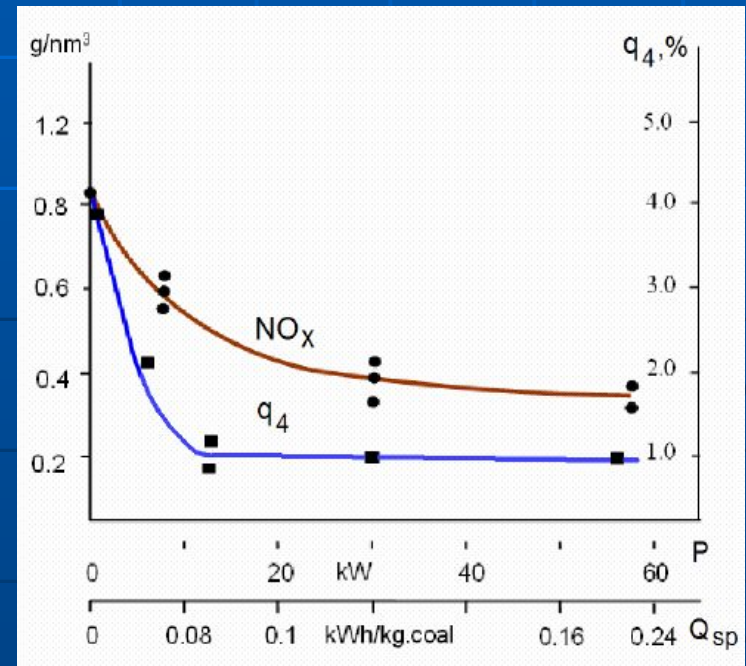

plasma processing of low-reactive coals



Main principle of plasma-power technology is dramatic decrease in the required electric power

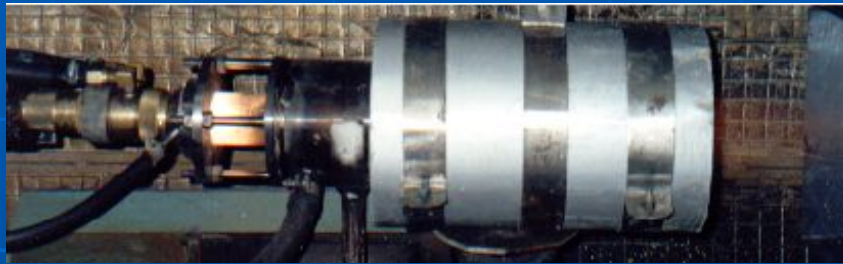

Plasma-jet reactor


Multiplication of capacity



*Plasma jet
(10kW)*



*Coal torch
(200 kW)*

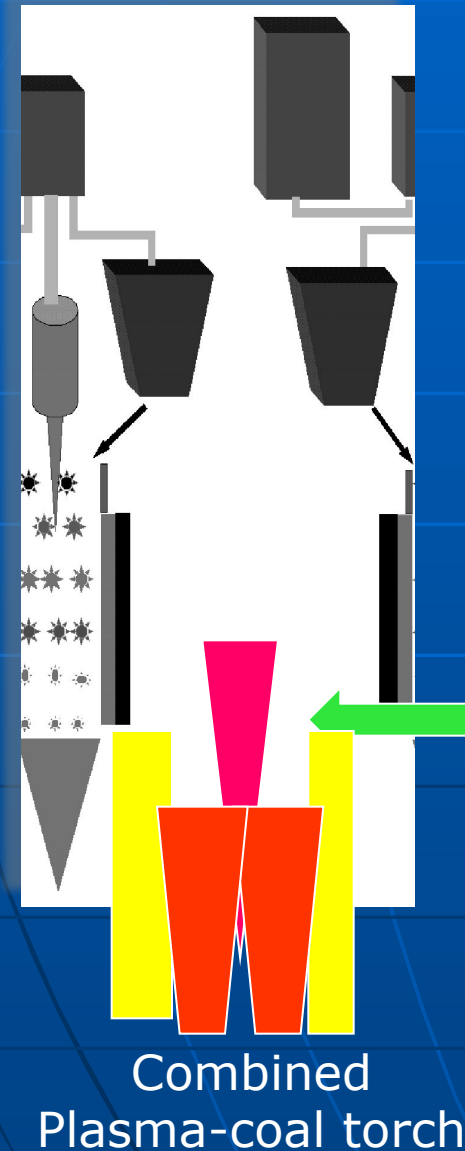

Power supply
Control panel

Feeder of a coal dust


Plasmatron

muffle furnace

Water steam

Combined
Plasma-coal torch

**Optimal utilization of the
steam-plasma effects,
leading to a substantial
increase in rates of
gasification and combustion
(10 and more times) of coal
particles**

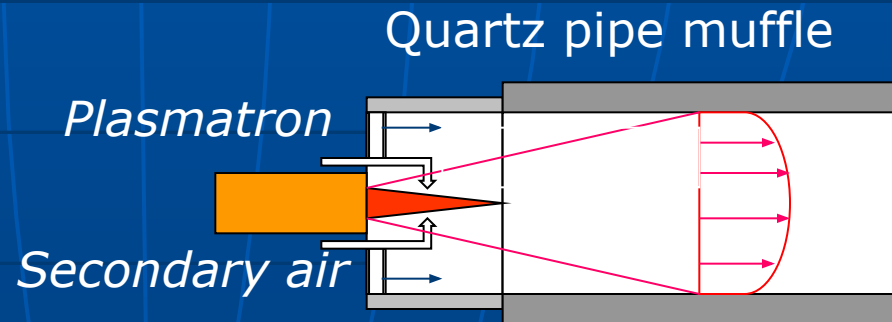

The scheme of a plasma-jet reactor

Dramatic decrease in the required electric power (by an order of magnitude) provides real technical and economical preconditions for efficient and wide-scale application of this technology in


power generation

Using such combined plasma-coal torch devices, it is possible to realize different sophisticated energy fuel-utilization technologies. They include:

- plasma ignition of the coal-dust flame (fuel oil free kindling of boilers, lighting of the coal-dust flame, stabilization of the liquid slag yield in furnaces with liquid slag removal);
- electric-thermochemical preparation of fuel (ETCPF) for combustion;
- coal distillation;
- plasma-steam coal distillation, production of synthesis gas;
- integrated processing of low-grade solid fuels in plasma reactors;
- processing of coal production wastes – coal slime.


The solar electric power

MBT

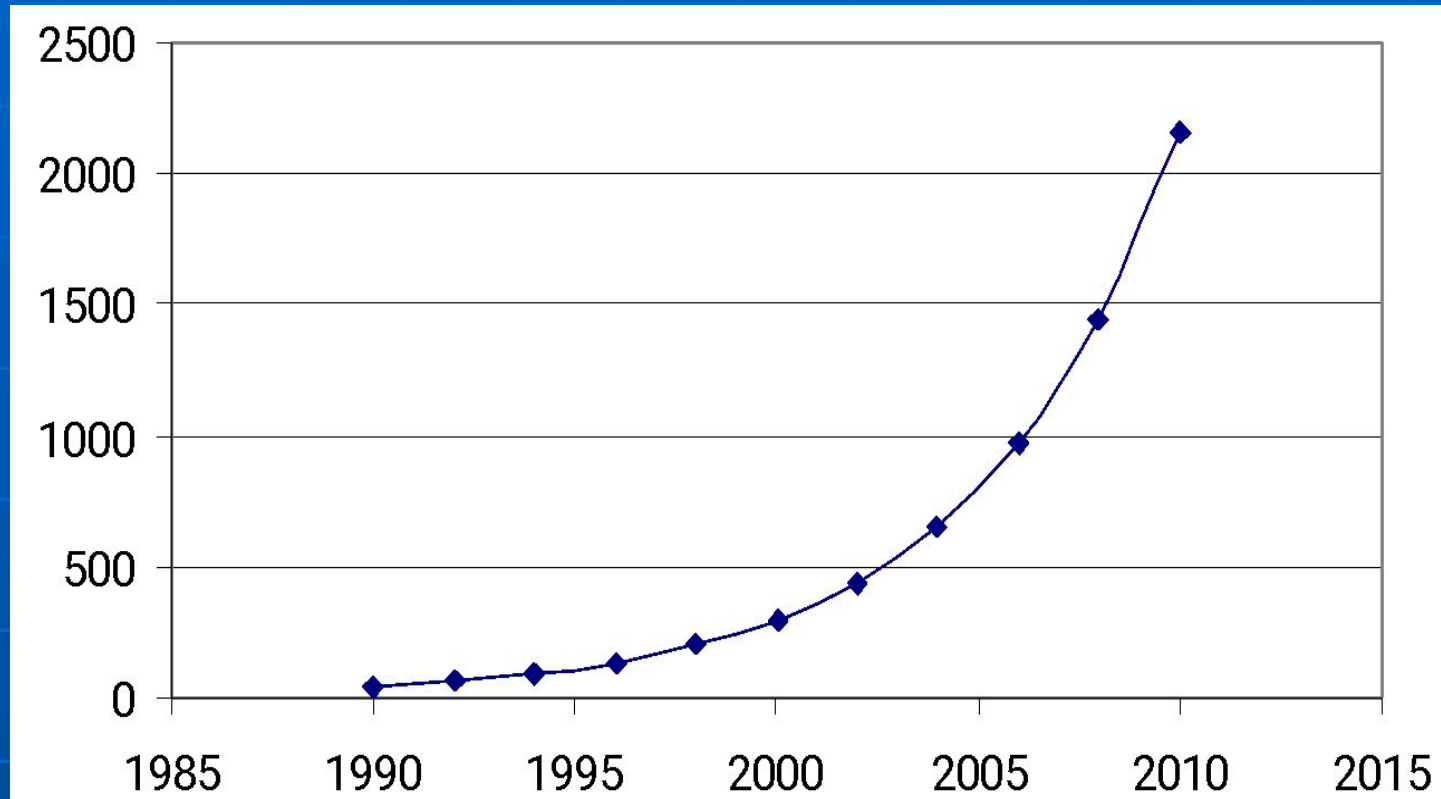


The average gain of manufacture of the solar electric power in the world with 1990 r on 2001 r has made 22 % a year. The nearest years higher rates of growth c corresponding escalating of manufacture highly purity solar silicon - from 65000 tons in 2001 r up to 350000 tons in 2010 are expected

The forecast of the industries highly purity silicon


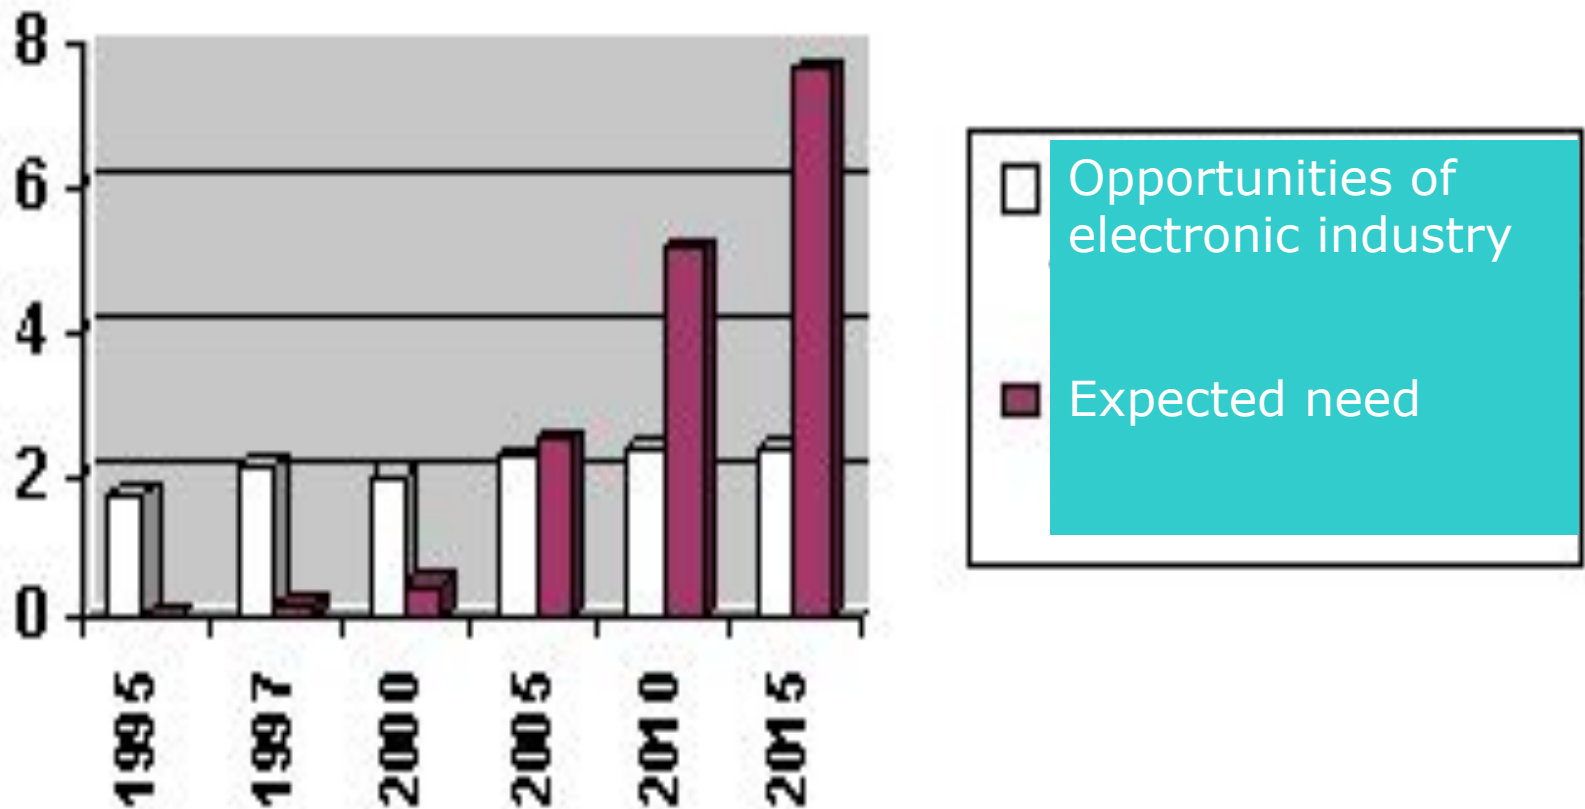


The price of silicon is defined by its cleanliness
and today this dependence looks as follows

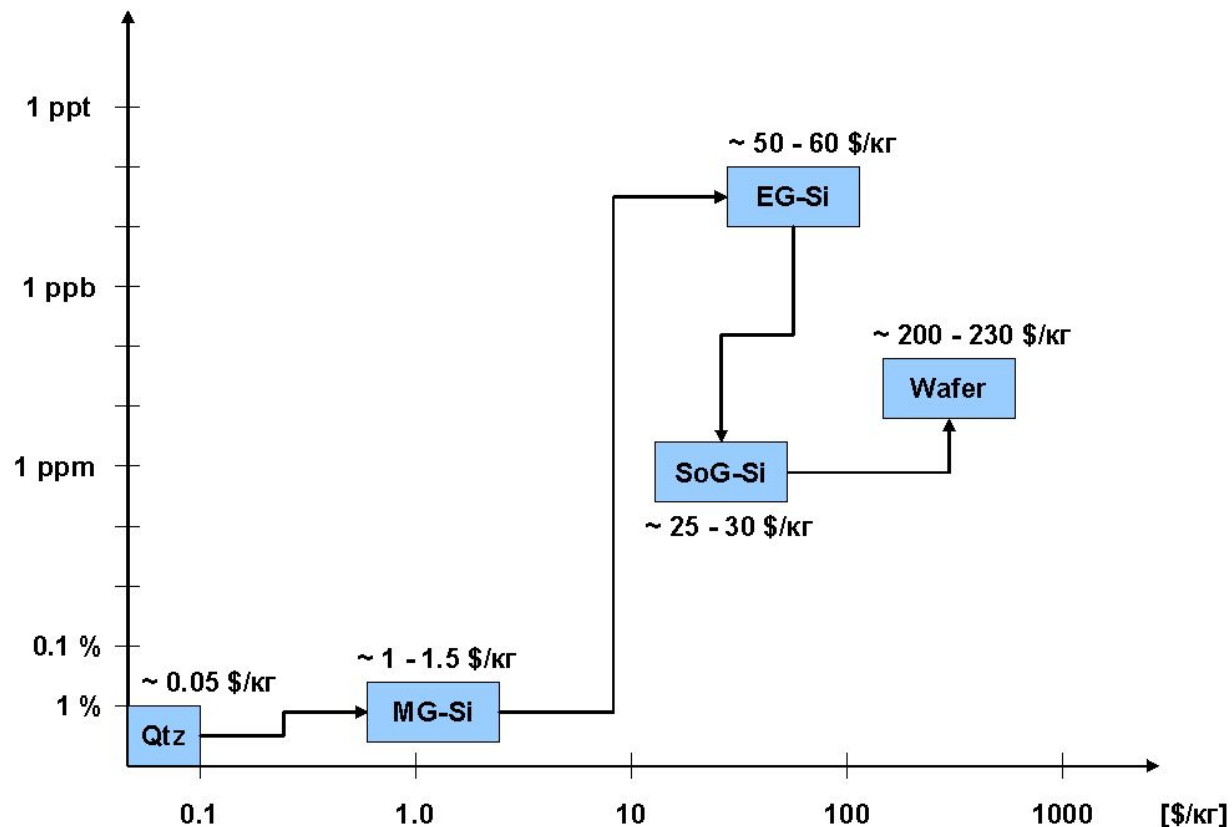

Manufacture of solar silicon

Equilibrium output of silicon (temperature, pressure)

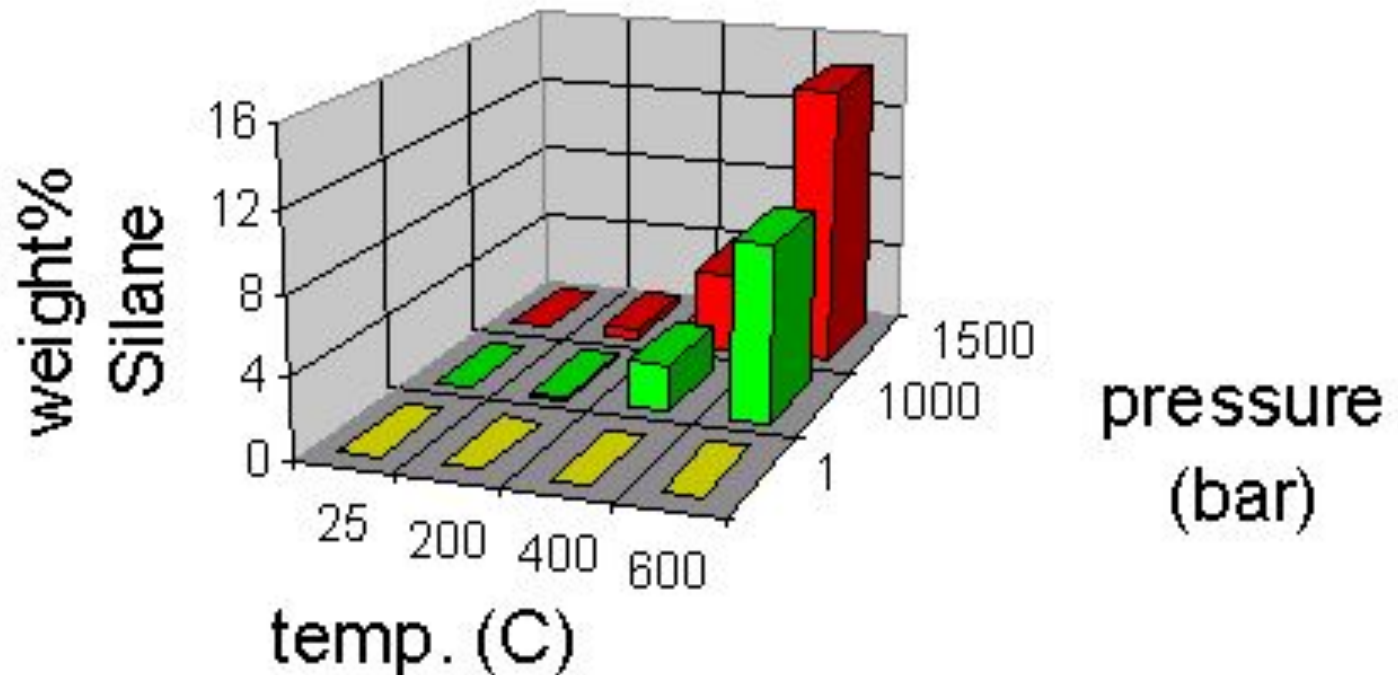


Manufacture of solar silicon

- According to thermodynamic calculations of 100 % decomposition of monosilane occurs already at 700 °C.
- Experimental data give higher value of temperature $T \ll 1000$ °C, but in any case disintegration SiH_4 occurs
- At temperatures a lot of smaller temperatures of fusion of silicon
- $T_{\text{пл. Si}} = 1690$ °C.

Machines of electroarc decomposition of monosilane should meet following requirements:

- 1. To provide a high degree of transformation of silicon in the condensed phase;
- 2. To provide necessary granulemetric structure of a received product;
- 3. To exclude pollution of received silicon by products of erosion of electrodes;
- 4. To have there is enough high efficiency and small power inputs.



Dependence of power inputs on temperature

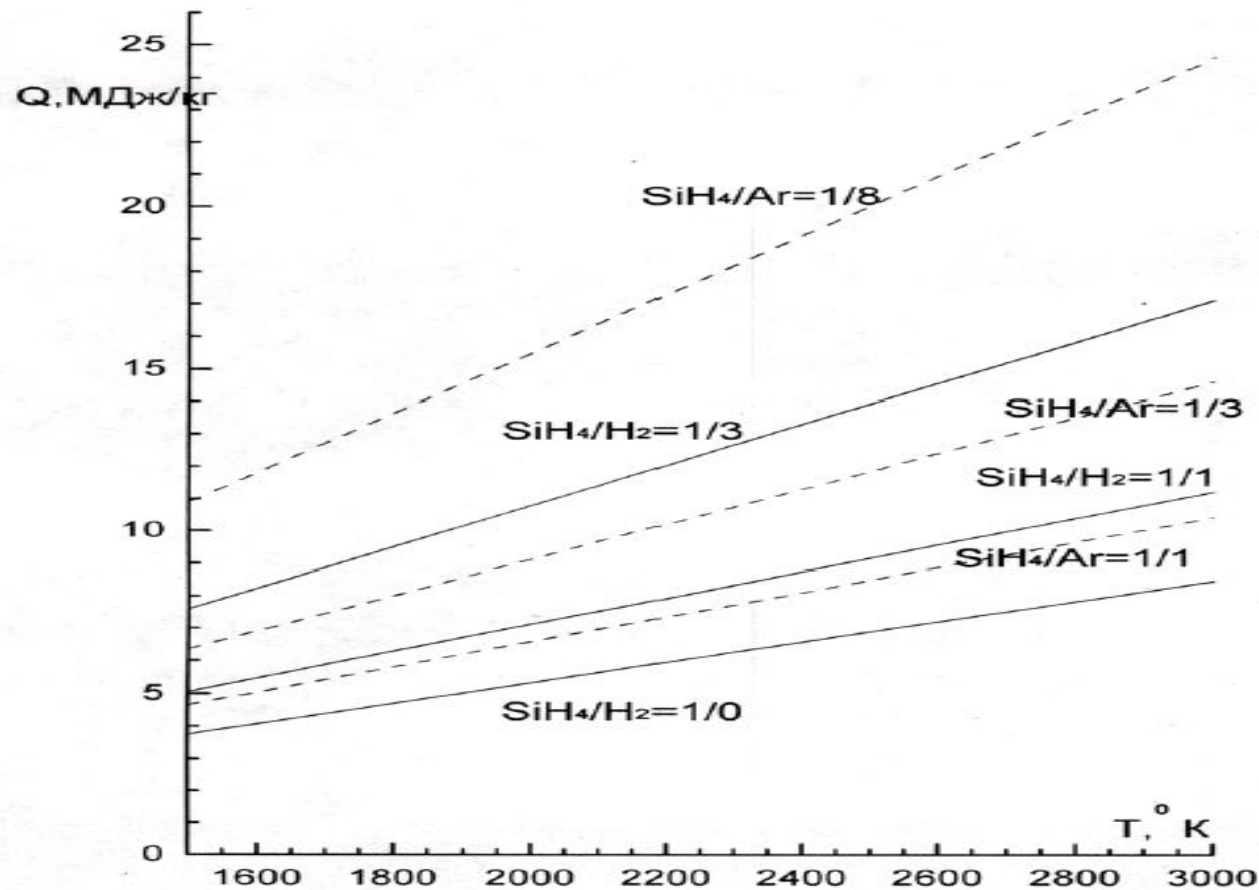

Manufacture of solar silicon

- At optimum a temperature mode and a degree dilution SiH_4 (1:2) and as considering efficiency plasmatron ($> 0,5$) a level Power inputs it is possible to estimate as 15-25 МДж (4-6 kw hour) on kg Si.
- The level of development of plasma technics reached to the present time will allow to count on creation of installation by capacity 1-2 МВт and Productivity up to 300-400 kg/hours Si.

Plasma-chemical reactor for pyrolysis of silane

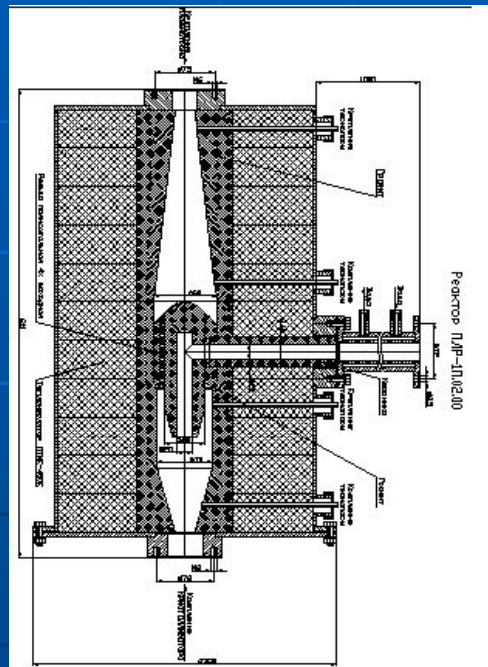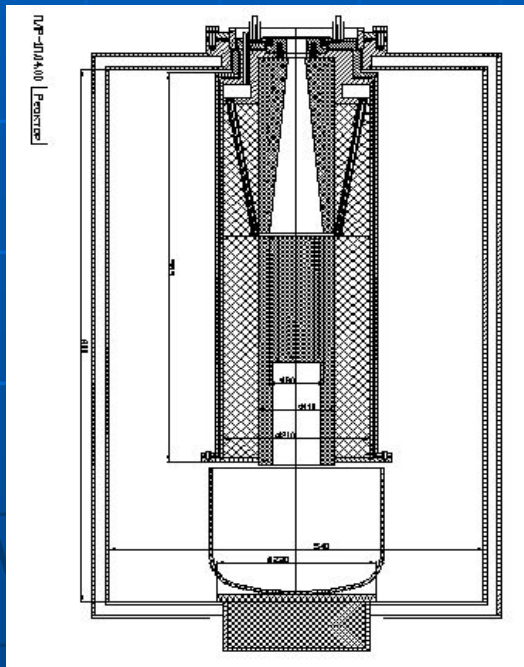

Hydrogen plasmatron 200 kw for pyrolysis of silane




Demonstration machine of plasma pyrolysis of silane



Plasmatron in operate for
pyrolysis of silane



Origin of particles of silicon from steam in plasma

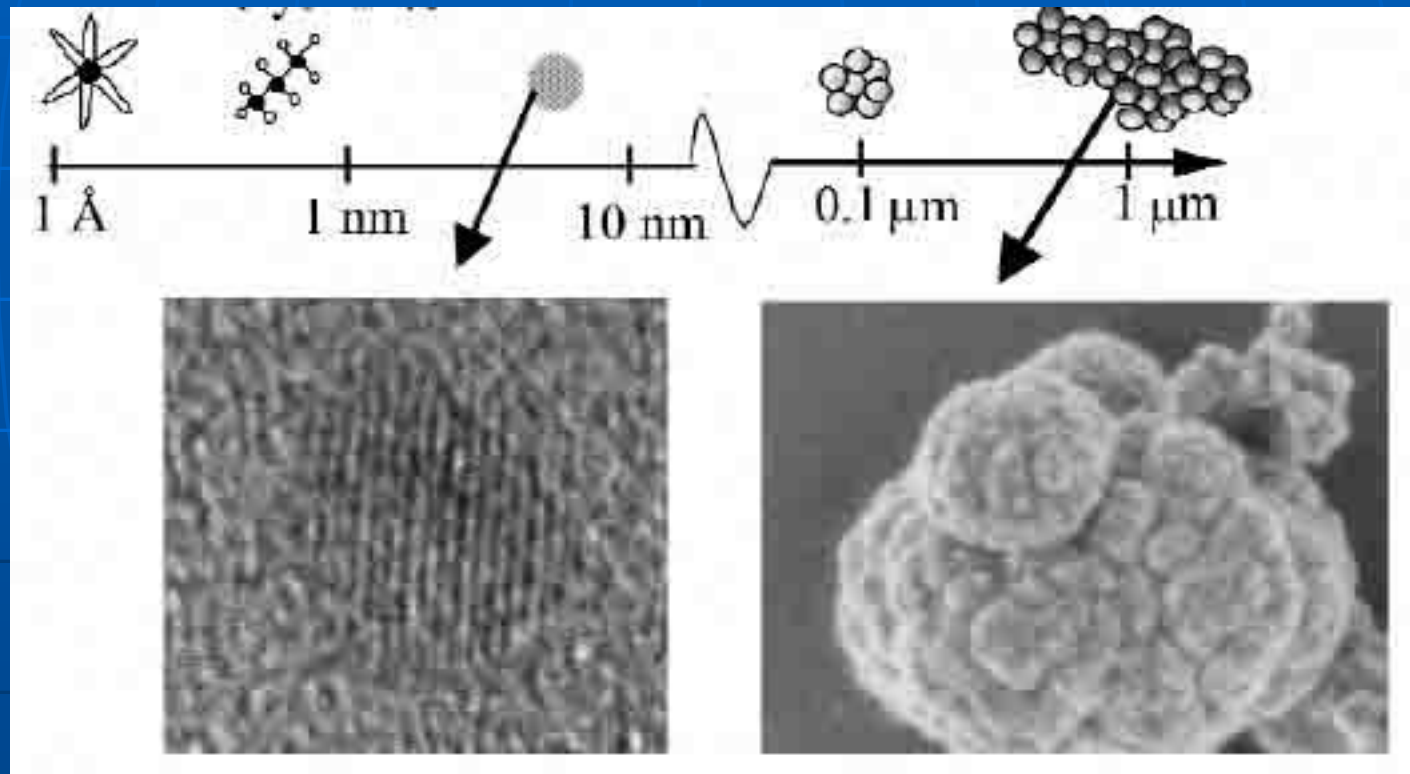


Manufacture of solar silicon

- Productivity of the plasma unit with plasmatron capacity of 200 kw makes 50 kg/hours of silicon. It provides at three-shift work and 220 working days in a year 200 Ton/year

PLASMA-ARC TECHNOLOGY OF PRODUCTION OF NEW ECOLOGICALLY PURE GASEOUS FUEL

Such gas is formed in conditions of very intensive magnetic fields in the electric arc shipped in processed liquid raw material

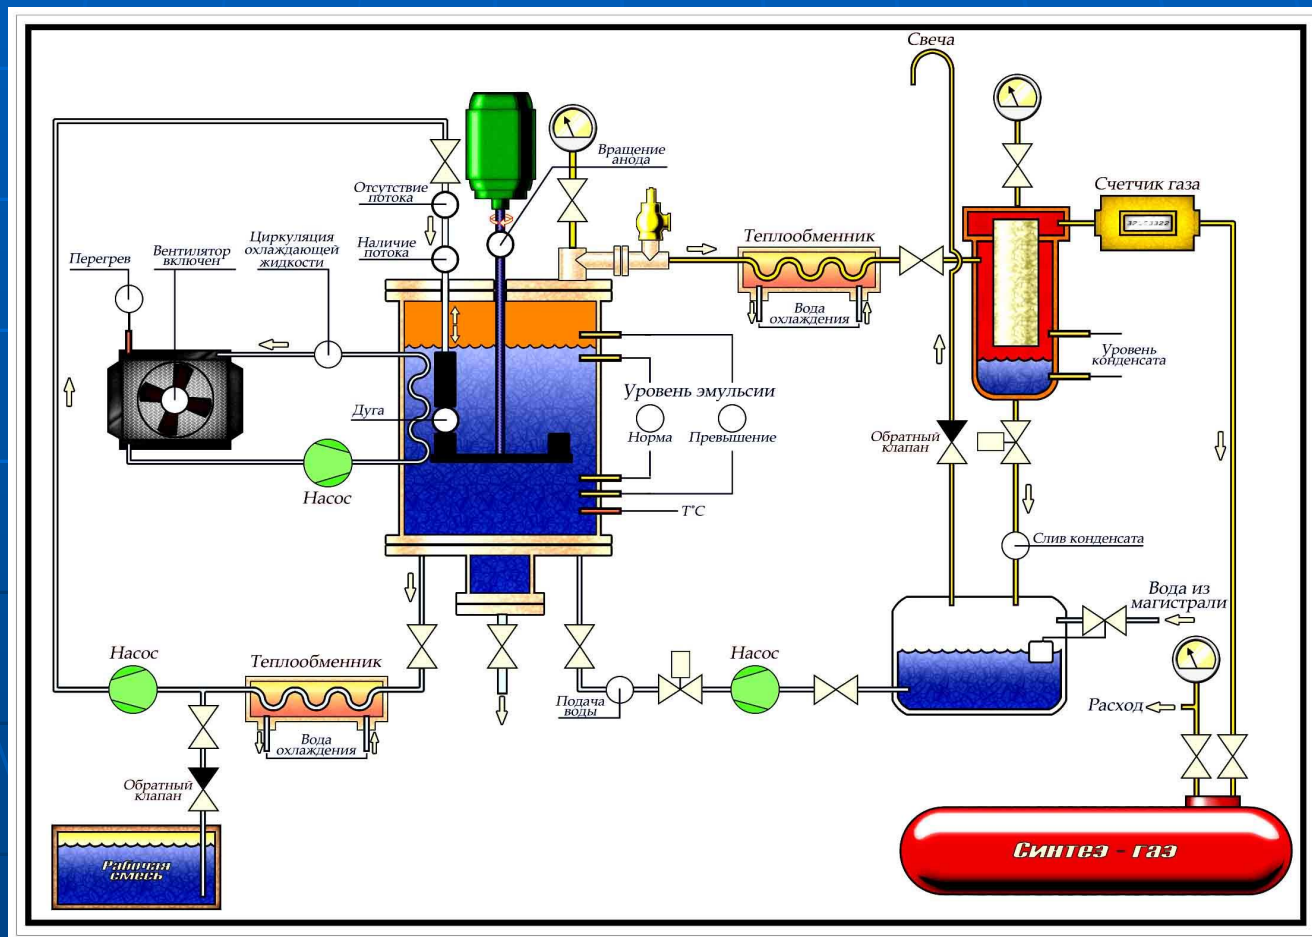

PLASMA-ARC MACHINE OF PRODUCTION OF NEW ECOLOGICALLY PURE GASEOUS FUEL FOR MOTOR TRANSPORT



DEVELOPMENT OF ELECTROARC GENERATORS OF STEAM-WATER PLASMA

Steam Plasmatron
40 KW



Laboratory Steam Plasma
Machine by capacity of 40 KW



**DEVELOPMENT OF
ELECTROARC
GENERATORS
STEAM-WATER PLASMA
WITH
RECUPERATIVE
STEAM HEAT UP**

