



# Проект eBay : Управление электропитанием, передовой опыт



Rob.Suijkerbuijk@raritan.com  
Руководитель по развитию бизнеса RARITAN  
INC в регионах Восточная Европа и Африка  
(+31) 10 28 440 46 • (+31) 6 1505 4629 моб.



# Реализовано в 2011г

- Подробное описание доступно на сайте Raritan.ru
- 19 Мая: Проект eBay получил премию Green IT: «Экологический проект года»
- Печатные материалы можно получить на стойке компании Raritan

## Case Study



### Real-Time Energy Optimization and Best Practices In a Mission-Critical Data Center

As one of the world's largest Internet commerce platforms, eBay demands extreme data center reliability; any downtime would impact transactions worth more than \$2,000 a second. Thus its global data center team must excel simultaneously in delivering uptime and flexibility, while keeping costs down – a truly complex challenge, requiring constant innovation to be successful.

Since its inception, eBay amassed a portfolio of 12 data center sites to keep up with its constantly-increasing compute load. Unsurprisingly, eBay's data center operating costs are also increasing every year as business growth continues unabated.

In response, eBay created and began executing a four-year data center plan with an ambitious goal: to cut power costs in half, while simultaneously doubling compute performance. At the same time, this new infrastructure design would enable greater operational agility and increased reliability.

To achieve these goals, eBay would consolidate its assets into a smaller number of data centers, each designed from the ground up to be extremely energy-efficient without compromising uptime.

"A successful data center strategy assumes that computing demand will grow every year, yet enables this growth without proportionate increases in operational expense," explains Dean Nelson, eBay's Senior Director of Data Center Strategy and Operations. "We have to break the linear relationship between compute load and operational cost. This requires regular, disruptive leaps in our energy efficiency, computational power and server utilization profiles."

In May 2010, eBay opened the flagship facility and cornerstone of its new data center strategy, Project Topaz. Located in South Jordan, Utah, Topaz is the single largest capital investment in eBay's history, and will house more than a third of its worldwide server infrastructure. Despite deploying all the necessary redundancies required for a Tier IV data center, Topaz can still boast a Power Usage Effectiveness (PUE) metric of only 1.4.


#### Maximum Rack Efficiency Enabled Through Best Practices

By employing innovative energy-efficient mechanisms in its infrastructure – such as an optimized building design, water-side economizers, rainwater collection and dynamic controls throughout the cooling and electrical distribution subsystems –

<b>Customer</b>	Founded in 1995, eBay connects a diverse and passionate community of individual buyers and sellers, as well as small businesses. With more than 90 million active users globally, eBay is the world's largest online marketplace, where practically anyone can buy and sell practically anything.
<b>Challenges</b>	With compute loads – and operating costs – on the rise, eBay created and began executing a four-year data center plan with an ambitious goal: <ul style="list-style-type: none"> <li>▶ To cut power costs in half</li> <li>▶ To double compute performance</li> <li>▶ To gain greater operational agility and increased reliability</li> </ul>
<b>Solutions</b>	<b>Power Management</b> Dominion® PX™ intelligent rack PDUs
<b>Results</b>	eBay developed a model for its data centers that makes their IT operations both highly reliable and 50% less expensive to operate than the data centers they are decommissioning. In addition to minimizing faults and lowering operating costs, eBay's South Jordan, Utah facility has achieved the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Gold ranking. Just as important as the LEED Gold efficiency ranking and Tier IV reliability is the flexibility designed into the eBay data center.



800.724.8090 / +1 732.764.8886 / Fax +1 732.764.8887 / sales@raritan.com

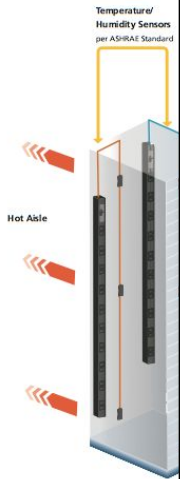

Specifically, eBay provides 400V 3-phase Raritan intelligent rack power distributed as "plug strips" or "rack PDUs" in each PDU, with internal line-to-neutral (3-pin) supplies each server with 240V, single phase within the operating range of the power any IT equipment.

By eliminating unnecessary voltage transform power reduces energy costs by approximately 4-5% vs.


As a global vendor of rack power distribution, Raritan provides a very large range of product covering 400V input. While 400V distribution is not standard in Australia and in many

Raritan Inc. / 400 Cottontail Lane / Somerset, NJ

# Ключевые бизнес-проблемы

**“Необходим существенный рост вычислительной мощности без пропорционального увеличения эксплуатационных затрат.”** - Dean Nelson

- Быстрый рост бизнеса + приобретение новых бизнесов
- Консолидация информационного центра: объединение 12-ти дата-центров
- Высочайшие требования к доступности (\$2,000 / сек.)
- Быстрая оборачиваемость активов: оптимизация удельной стоимости поиска
- Цель:
  - Tier IV (уровень надежности)
  - Энергоэффективность (PUE) 1.4
  - Лидерство в отраслевых инновациях

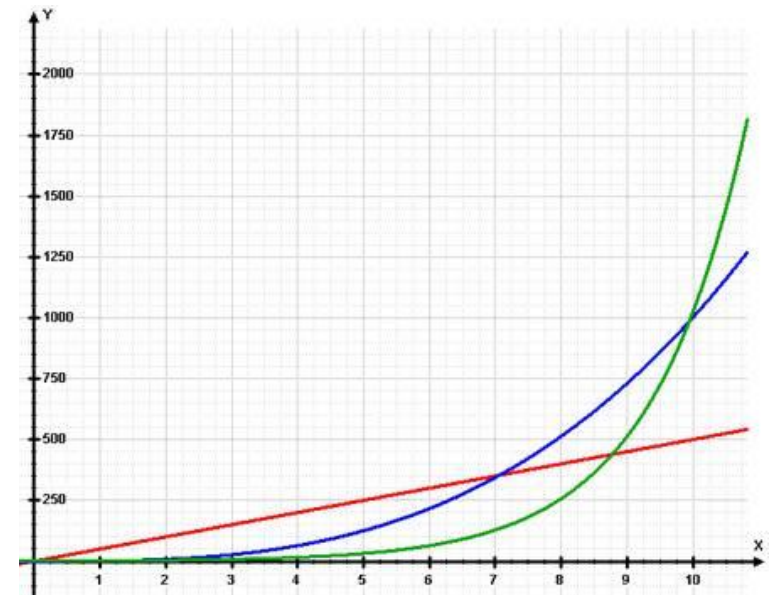

# Проект «Топаз»

## Дата-центр в Солт-Лэйк-Сити


- Самые крупные капиталовложения в истории компании
- Золотой сертификат LEED
- Электростанция 30 МВт
- 5.500 м<sup>2</sup> используемого IT-пространства
- 90 км проложенных под землей кабель-каналов
- 900.000 кг меди проложенных под землей для обеспечения надежного электропитания
- 20,000 Волоконно-оптических кабелей : 54 км;  
Приблизительно 43,000 волокон
- 1.2 миллиона человеко/часов работы за 14 месяцев



Фото предоставлено eBay

## Повышен уровень внедрения инноваций


- Детализация инструментария сервера
- Подача 400В к каждому шкафу
- Более детальное оснащение температурными датчиками

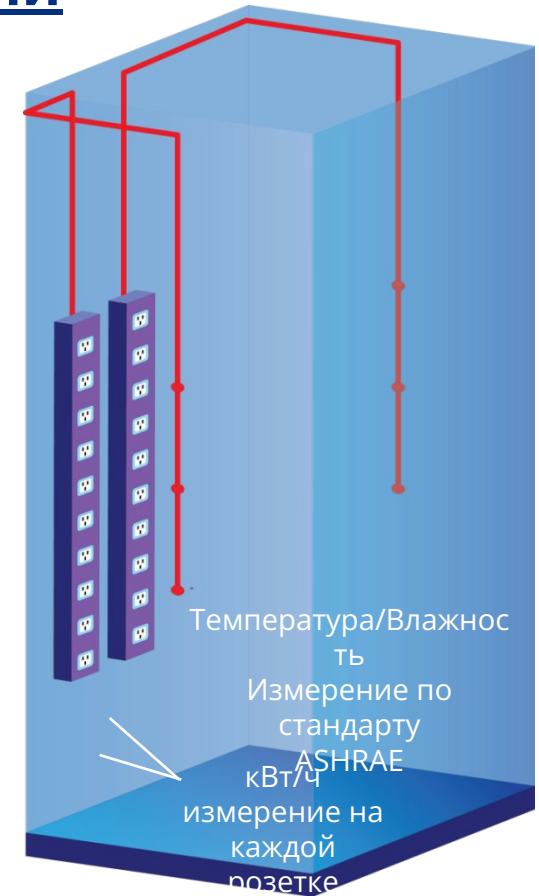

# Оснащение серверов контрольно-измерительной системой

- Позволяет делать точные вычисления стоимости эксплуатации активов
- Точные показания (+/- 1%)
- Правильные измерения кВт/ч / А / кВт / кВА
- Огромный выбор устройств измеряющих параметры на каждой розетке

(В)

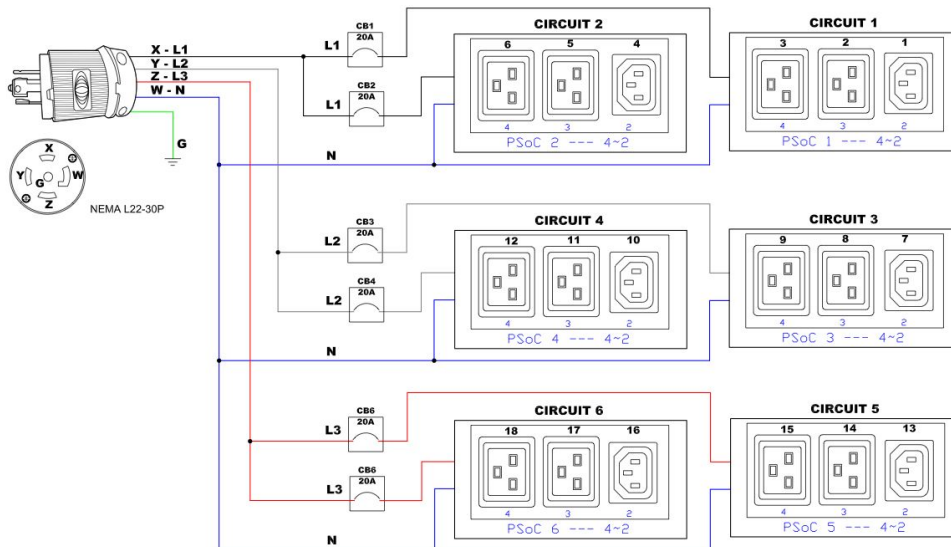

**Readings**

The last reading was done at 09/11/08 07:05:27 AM.

Unit level readings	Act. Power (Watts)	App. Power (Watts)
Unit	827.75	827.75

Line/circuit breaker readings	Current (Amps)	Available (Amps)
Line 1	3.98	31.02
Line 2	3.98	31.02
Line 3	0.00	35.00
Circuit breaker 1	3.98	16.02
Circuit breaker 2	0.00	20.00
Circuit breaker 3	0.00	20.00

There are 24 outlets on this device.


#	Outlet	Current (Amps)	Act. Power (Watts)
1	RACK1_File_Brokerage Div	0.00	0.00
2	RACK1_File_Brokerage Div	0.00	0.00
3	RACK1_File_Trading Div	0.00	0.00
4	RACK1_File_Trading Div	0.00	0.00
5	RACK1_Web_Brokerage Div	3.98	827.75
6	RACK1_Web_Brokerage Div	0.00	0.00
7	RACK1_Web_Trading Div	0.00	0.00
8	RACK1_Web_Trading Div	0.00	0.00
9	RACK1_Web_Banking Div	0.00	0.00
10	RACK1_Web_Banking Div	0.00	0.00
11	RACK1_Web_Banking Div	0.00	0.00
12	RACK1_Router_Banking Div	0.00	0.00
13	RACK1_Router_Brokerage Div	0.00	0.00
14	RACK1_Router_Trading Div	0.00	0.00
15	RACK1_Router_Brokerage Div	0.00	0.00
16	RACK1_Oracle_Corporate	0.00	0.00

# Электропитание серверных стоек 400-вольт



~17.5кВт

- Уменьшение потерь при преобразовании
- Уменьшение потерь при передаче (Закон Ома  $V=IR$ )
- Меньше меди, больше энергии
- Широкое распространение по всему миру

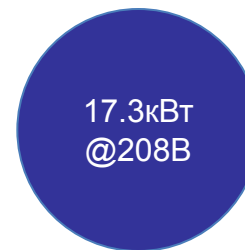


3Ф 4В, 4# (48А)  
32мм (1.26")  
наружный диаметр




4Ф 5В, 8# (24А)  
27.3мм (1.08")  
наружный диаметр

Источник: General Cable SOOW Spec Sheet

# Детализированная информация о температуре и влажности

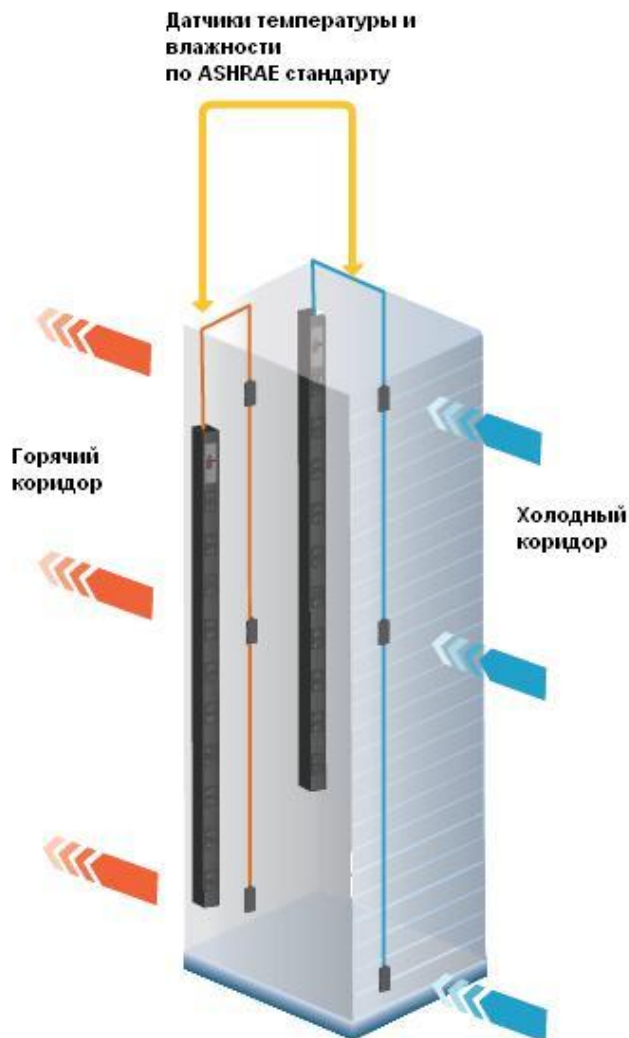

- Рекомендовано ASHRAE
- Оптимизация инфраструктуры предприятия/ наиболее значимые метрики
- Рентабельность: использование существующих сетевых активов для обеспечения передачи данных
- Всего один провод: простой экономичный монтаж
- Отчеты по SNMPv3, оповещения, и т.д.
- Интеграция с BMS
- 2772 датчиков в общей сложности

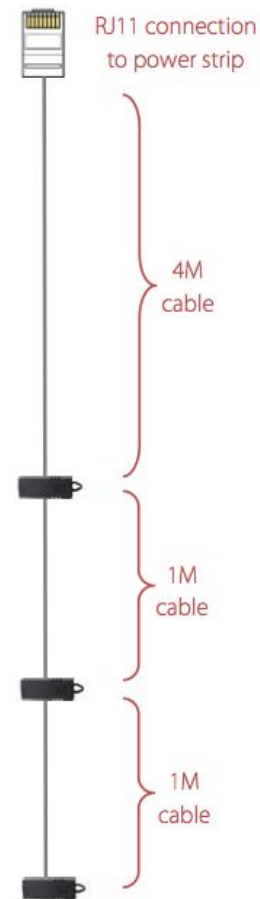



# Другие инновации



- Беспроводное подключение к PDU (WiFi 802.11g/n)
- Разноцветные PDU для снижения вероятности «человеческой ошибки»
- Динамическое отслеживание активов



# Успех в сотрудничестве

Большое спасибо!




Дистрибьютор Raritan в России



# Преимущества Raritan


## В фокусе:

- Оптимизация энергопотребления
- Эксплуатационная эффективность



Превосходные  
средства

Исключительно  
надежное оборудование




Технологические  
инновации



Масштабируемые  
программные продукты

# Консолидация данных об окружающей среде

- Подробное CFD изображение холодных и горячих точек
- Графики температуры в серверных стойках
- Проверка, на соответствие стандартам ASHRAE
- Быстрый просмотр показаний датчиков при получении предупреждений

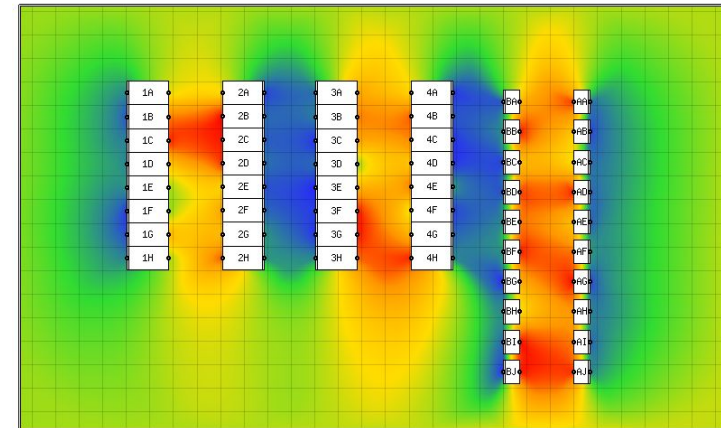


Psychrometric Chart [operational view of temperature and humidity sensors in data center]

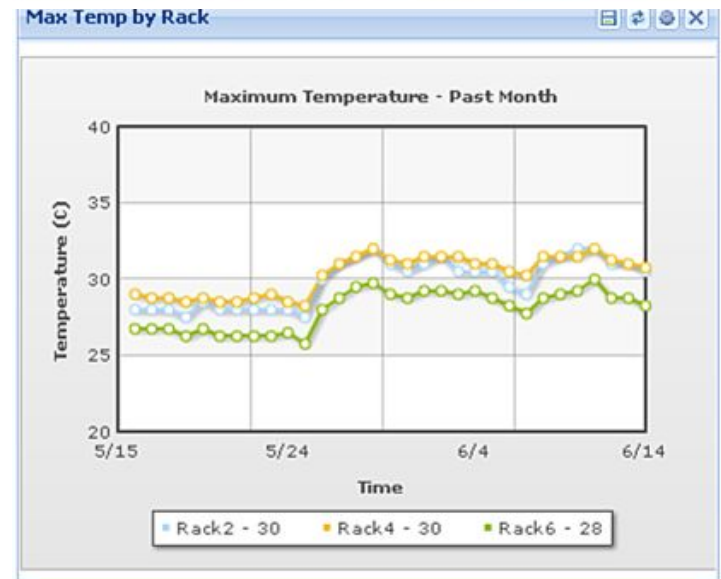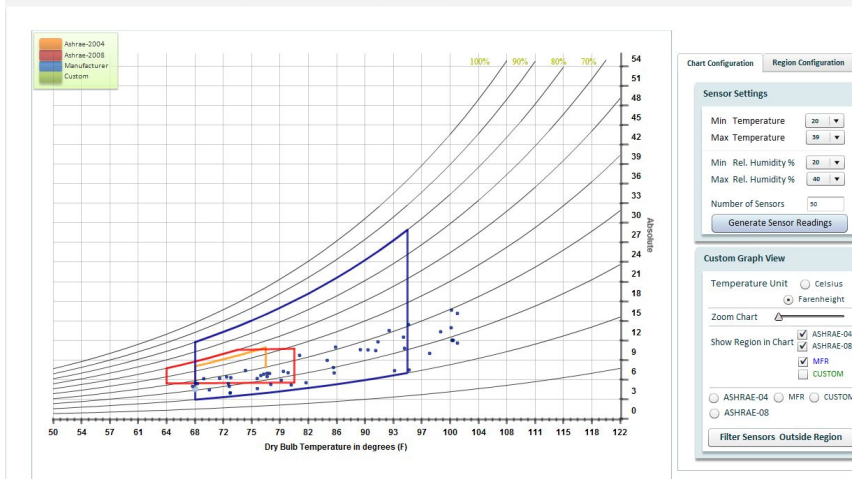


# Консолидация данных: распределение электроэнергии

Найдите  
свободные  
мощности

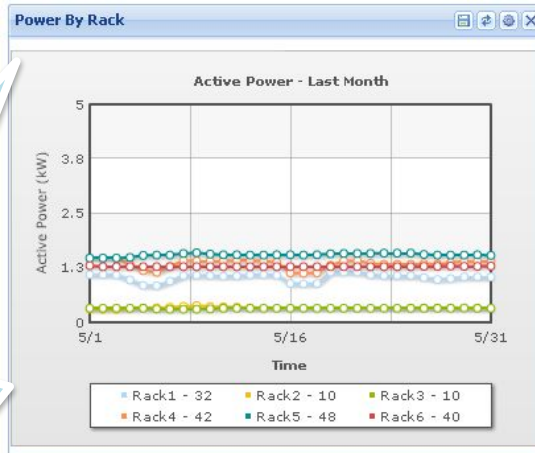



Повысьте  
доступность

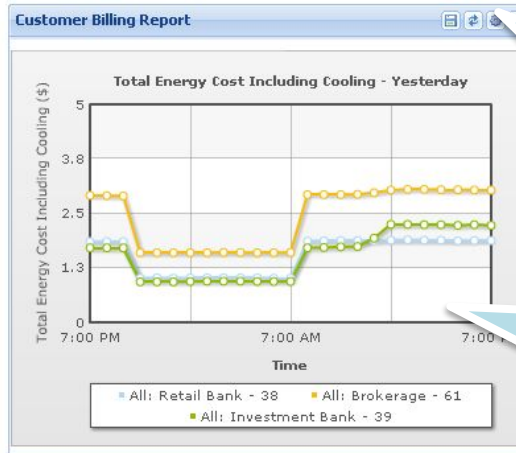

Реализуйте  
программы  
сокращения  
затрат

Увеличьте  
эффективность  
энергопотребления

Узнайте  
уровень  
выбросов CO<sup>2</sup>  
Вашим ЦОД

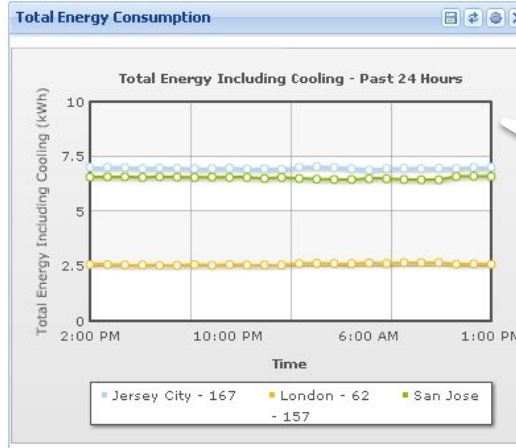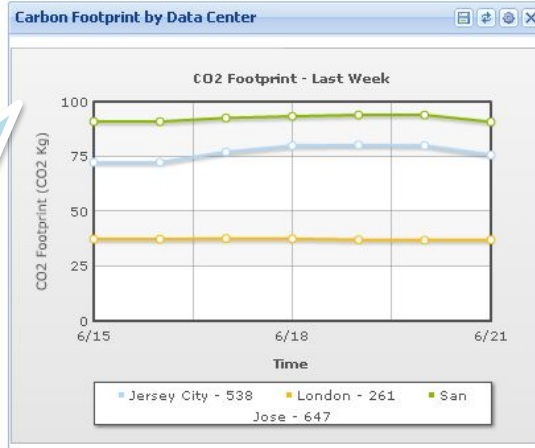

Измерьте PUE

# Спасибо!

Rob.Suijkerbuijk@raritan.com – Руководитель по развитию бизнеса RARITAN INC  
в регионах Восточная Европа и Африка  
+31 -10 284 4046 • +31- 6 - 505 4629 мобильный

## Дополнительная информация на сайте

---

[www.raritan.ru](http://www.raritan.ru)

---

а также на стенде Раритан в  
холле

# Backup

# Интеллектуальные измерительные модули




Optional plug-and-play environmental sensors, including temperature and humidity

Servers plug into dumb PDUs



The dumb PDUs are connected to a PX-3000 Series Inline Meter

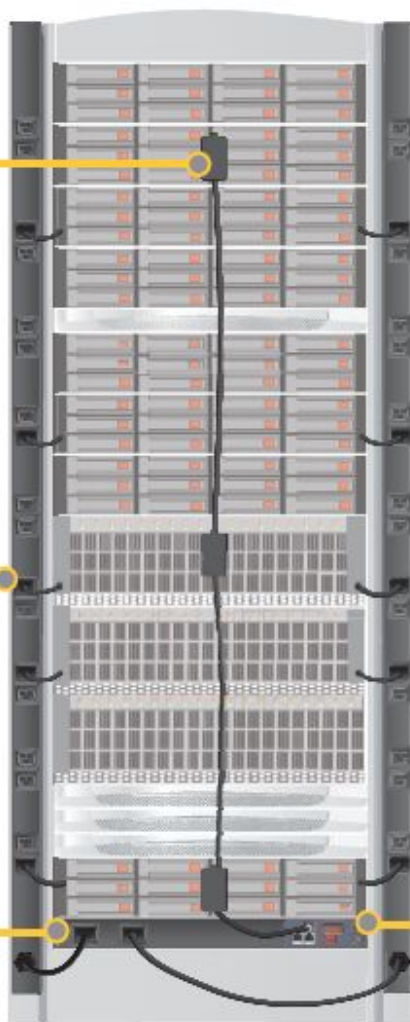

At-the-rack power monitoring of current (amps), voltage and active power (watts)




Ethernet and serial ports for easy Web-based GUI or CLI access. Environmental sensors are plugged into the PX-3000 feature port



Remote power monitoring, including current (amps), voltage, power (kVA, kW) and energy consumption (kWh)



Two and four lines available per model

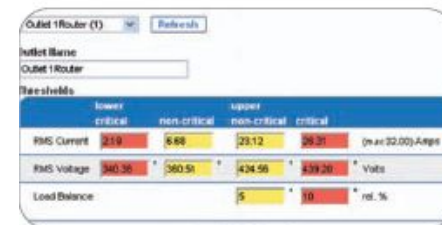

Alerts via SNMP, e-mail and syslog when thresholds are exceeded



# Интеллектуальные PDU 208В и 400В





## Обзор характеристик

	30А	30А	30А
Кол-во фаз	1 фаза	3 фазы Delta	3 фазы Wye
Вх. напряжение	208В	208В	400В
Вых.Напряжение	208В	208В	230В
Макс.нагрузка	5.0 кВА	8.6 кВА	16.6 кВА
Поддержка 1U серверов*	24	41	80
Поддержка 2U серверов *	24	41	80
Поддержка Blade-серверов *	1	1-2	3-4

\*HP ProLiant GL 360G6 1U server, 206 watts at 80% load on SPECpower\_ssj2008  
HP ProLiant GL 380G6 2U server, 208 watts at 80% load on SPECpower\_ssj2008  
HP ProLiant C7000, ProLiant BL2x220c G6, 4860 watts at 80% load on SPECpower\_ssj2008

# Программное обеспечение для Дата-центров

## dc Track™

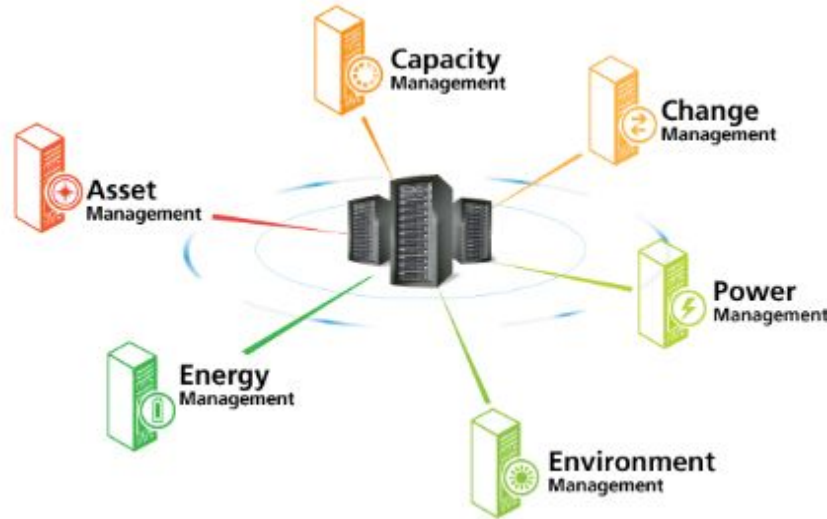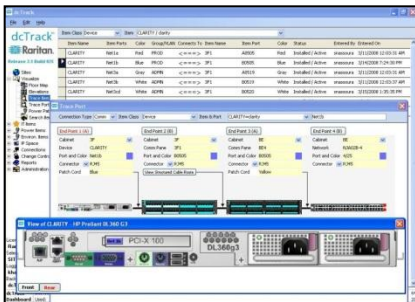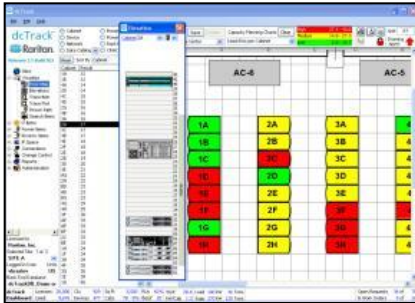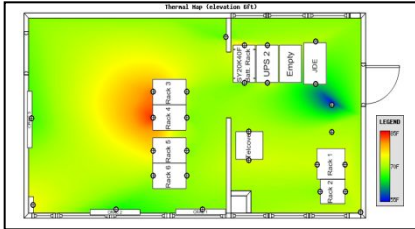

## Power IQ

