



# RX470 rework SOP

## Step 1、 Replace MLCC

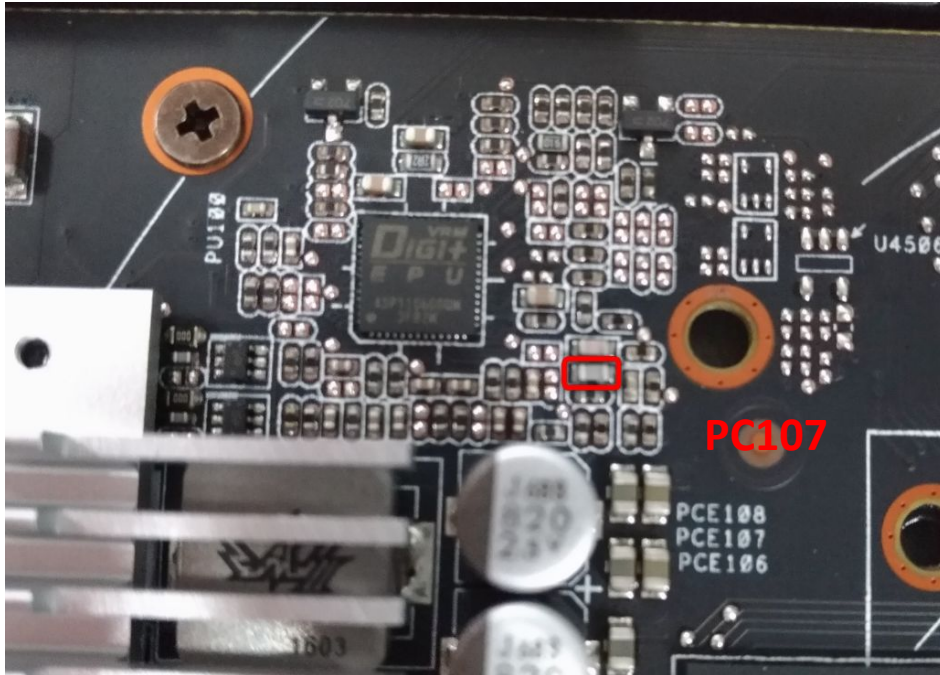

Replace the location MLCC of PC107  
in red circle with 150 pf  
**(PN:11G233015104030)**

## Step2、 Remove MLCC between GND and DGND

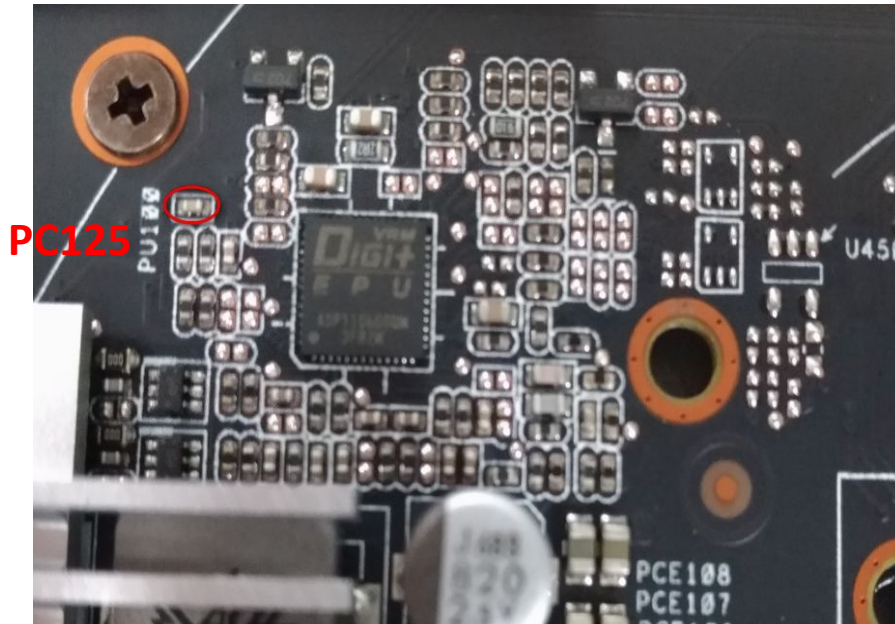

Remove the capacitance of location PC125 in the red circle of the picture