



RX470 rework SOP

Step 1、 Replace MLCC

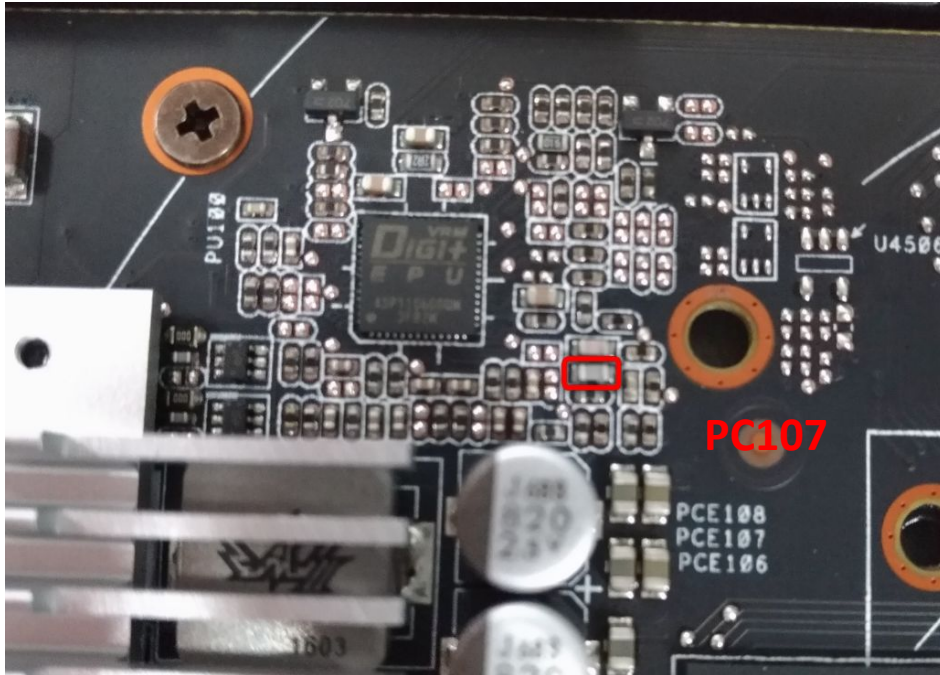

Replace the location MLCC of PC107
in red circle with 150 pf
(PN:11G233015104030)

Step2、 Remove MLCC between GND and DGND

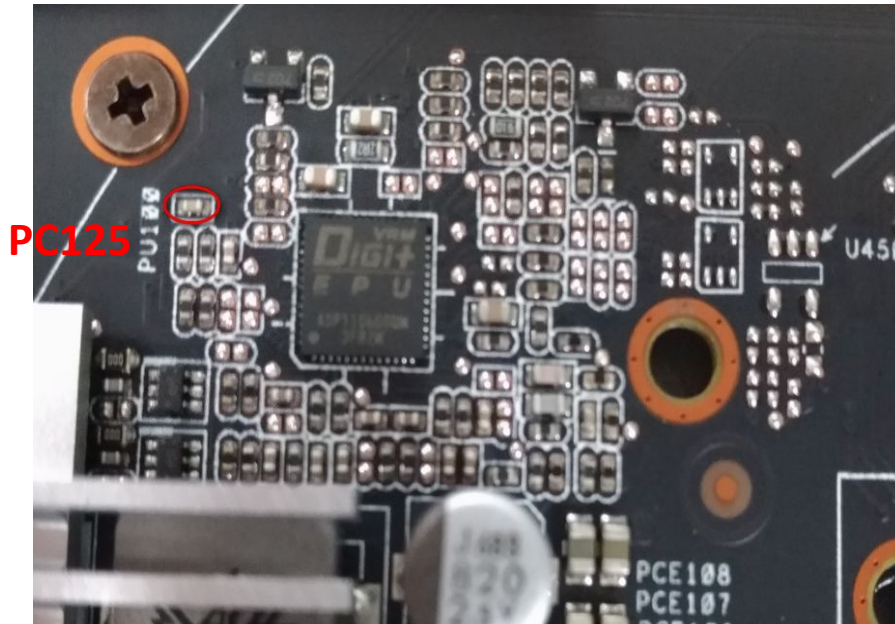

Remove the capacitance of location PC125 in the red circle of the picture