


RIBBON BULB

Type: B35


GE.NO.: GE0096-632B

Issue date: 1996.02.15.

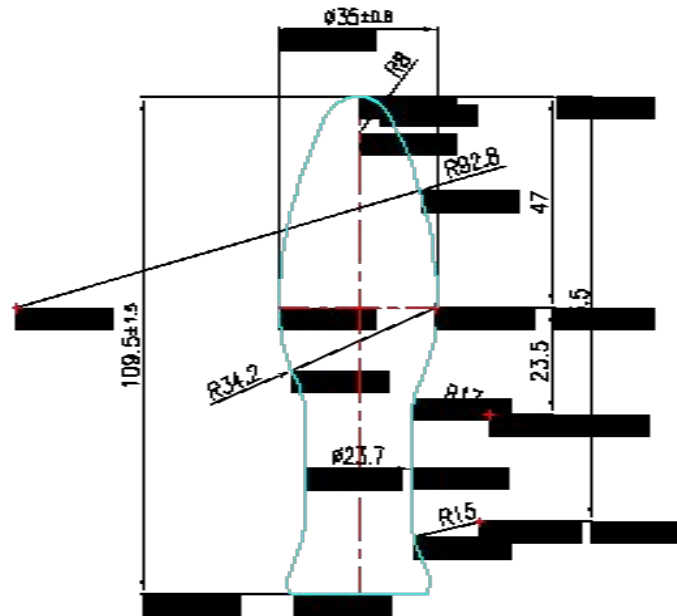


Neck	Outside Diameter	Max. 24.2
	Inside Diameter	Min. 21.25
	Oval	Max. 0.5
Flare	Outside Diameter	Max. 31.5
	Inside Diameter	Min. 22.1
Wall thickness limits & measuring position		
	Neck, at 75 mm from Top	0.41-0.75
	Side, at Max Diameter	Min. 0.40
	Top, at Centre Top	0.45-1.27

cc:12.2gram

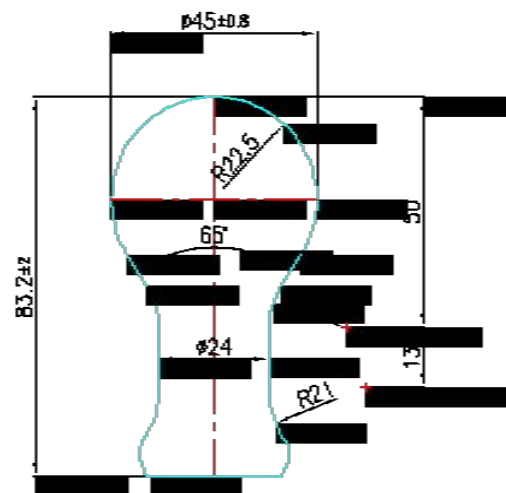

Neck	Outside Diameter	Max. 24.5
	Inside Diameter	Min. 21.85
	Oval	Max. 0.7
Flare	Outside Diameter	Max. 32.9
	Inside Diameter	Min. 23.5
Wall thickness limits	& measuring position	
	Neck, at 54 mm from Top	0.41-0.84
	Side, at Max Diameter	Min. 0.38
	Top, at Centre Top	0.51-1.53

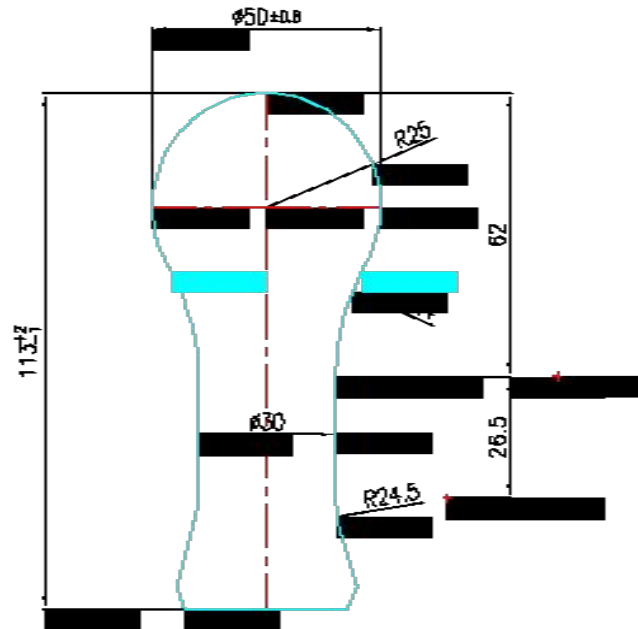


Neck	Outside Diameter	Max. 30.5
	Inside Diameter	Min. 27.6
Flare	Oral	Max. 0.8
	Outside Diameter	Max. 40.2
	Inside Diameter	Min. 30.3
Wall thickness limits & measuring position		
	Neck, at 73 mm from Top	0.40-0.70
	Side, at Max Diameter	Min. 0.40
	Top, at Centre Top	0.40-1.10

RIBBON BULB

Type: **A60**


GE.NO.: GED096-6325

Issue date: 1995.02.15.

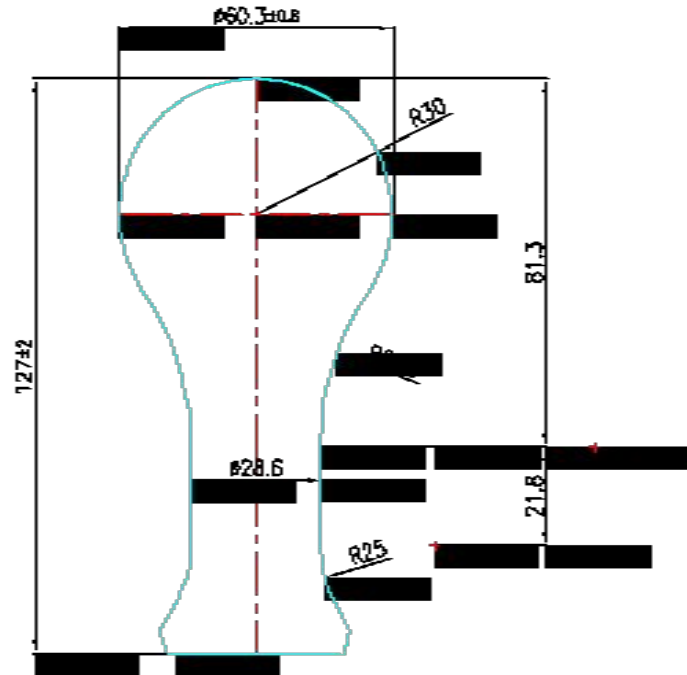


Neck	Outside Diameter	Max. 29.4
	Inside Diameter	Min. 26.16
	Oval	Max. 0.8
Flare	Outside Diameter	Max. 42.3
	Inside Diameter	Min. 31
Wall thickness limits & measuring position		
	Neck, at 88 mm from Top	0.38-0.66
	Side, at Max Diameter	Min. 0.38
	Top, at Centre Top	0.51-1.14

cc:29.5gram

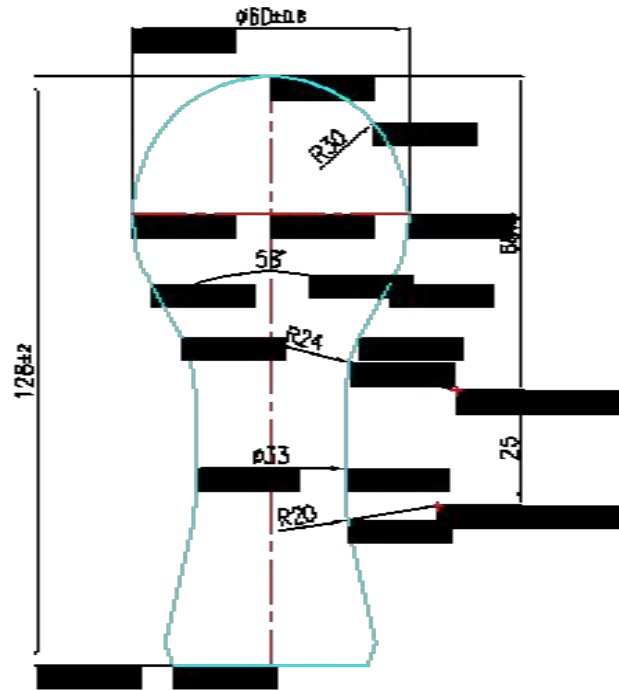

Neck	Outside Diameter	Max. 33.5
	Inside Diameter	Min. 30.6
	Oval	Max. 0.8
Flare	Outside Diameter	Max. 44.3
	Inside Diameter	Min. 32
Wall thickness limits & measuring position		
	Neck, at 82.5 mm from Top	0.41-0.71
	Side, at Max Diameter	Min. 0.38
	Top, at Centre Top	0.46-1.27

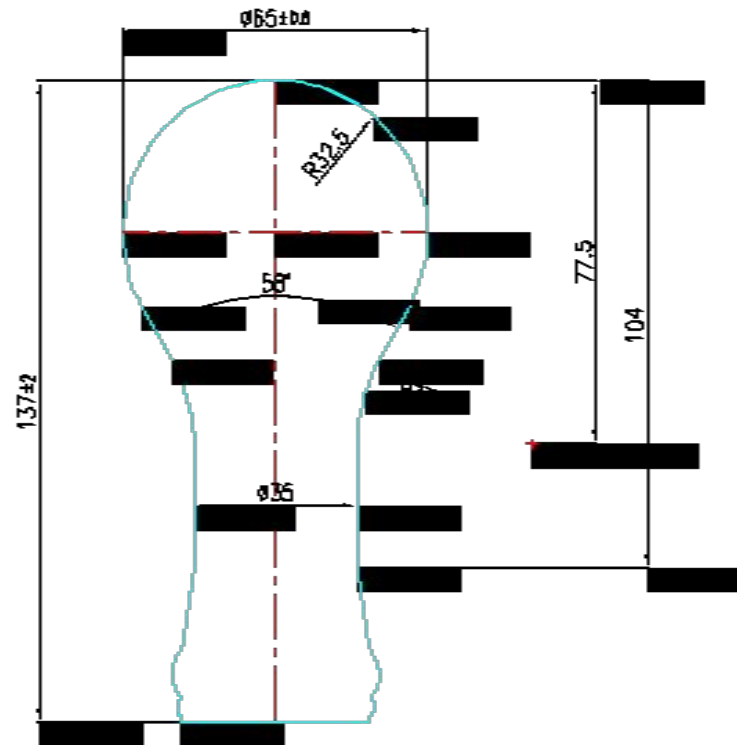

Neck	Outside Diameter	Max. 35.8
	Inside Diameter	Min. 32.6
	Oval	Max. 0.5
Flare	Outside Diameter	Max. 47
	Inside Diameter	Min. 34
Wall thickness limits & measuring position		
	Neck, at 100 mm from Top	0.45-0.75
	Side, at Max Diameter	Min. 0.4
	Top, at Centre Top	0.70-1.50


(T68/37)

ROTARY BULB

Type: PS68A

GE.NO.:

Issue date: 1995.02.15.

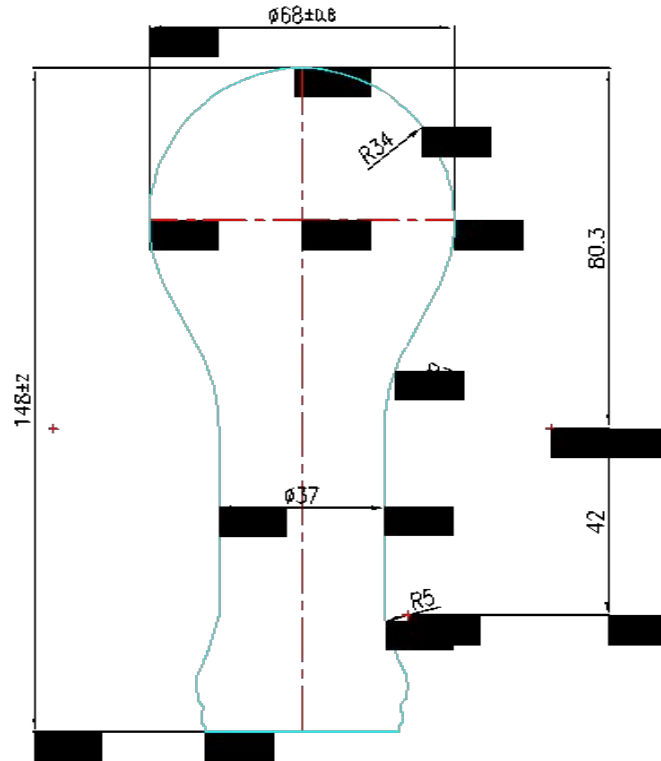

Neck	Outside Diameter	Max. 37.5
	Inside Diameter	Min. 34.6
	Oval	Max. 1
Flare	Outside Diameter	Max. 50
	Inside Diameter	Min. 36.8
Wall thickness limits & measuring position		
	Neck, at 104 mm from Top	0.41-0.76
	Side, at Max Diameter	Min. 0.38
	Top, at Centre Top	0.70-1.50


cc:41gram

RIBBON BULB

Type **R50**

GE. NO.: GEG096-8323

Issue 01/01

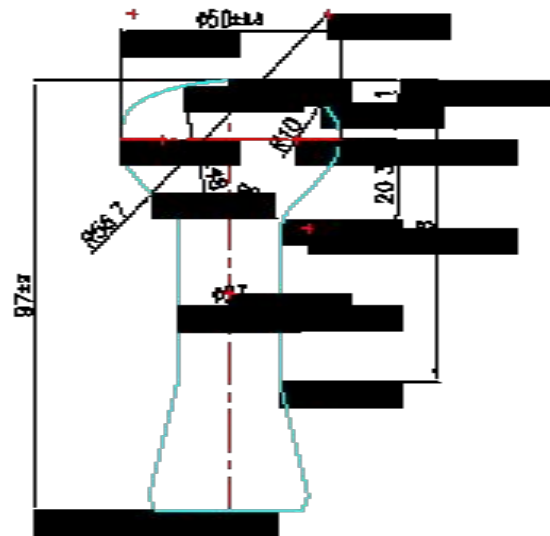

Neck	Outside Diameter	Max. 23.8
	Inside Diameter	Min. 20.6
	Oval	Max. 0.8
Flare	Outside Diameter	Max. 36.2
	Inside Diameter	Min. 25.8
Wall thickness limits & measuring position		
	Neck, at 65 mm from Top	0.40-0.75
	Side, at Max Diameter	Min. 0.35
	Top, at Centre Top	0.45-1.30

cc:18.9gram




RIBBON BULB

Type: **R50A**


GE. NO.: GED096-????

Mass 101g

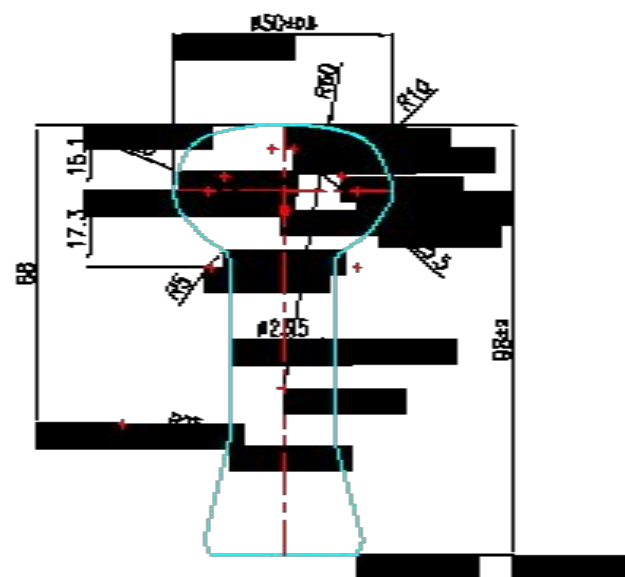

Neck	Outside Diameter	Max. 24.3
	Inside Diameter	Min. 20.6
Flare	Dist	Max. 0.8
	Outside Diameter	Max. 36.2
	Inside Diameter	Min. 25.8
Wall thickness limits & measuring position		
	Neck, at 63 mm from Top	0.40-0.70
	Side, at Max Diameter	Min. 0.35
	Top, at Centre Top	0.45-1.30

ca: 19gram

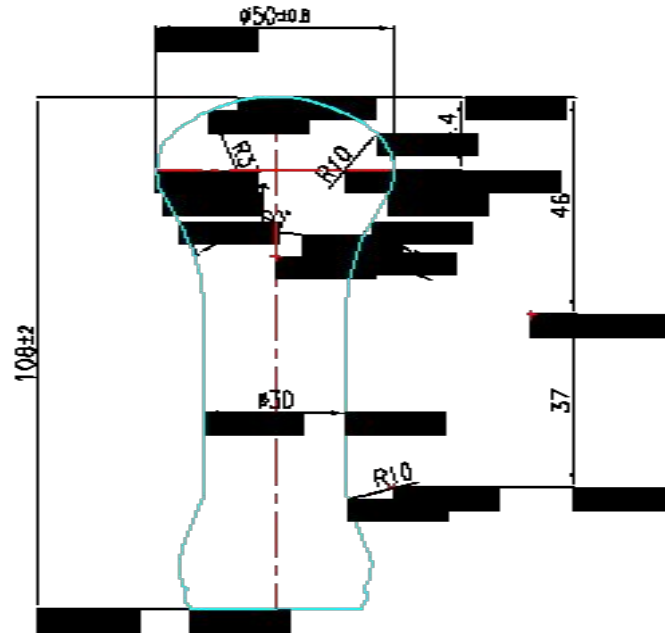


Neck	Outside Diameter	Max. 30.5
	Inside Diameter	Min. 27.6
	Oval	Max. 0.8
Flare	Outside Diameter	Max. 42
	Inside Diameter	Min. 30.3
Wall thickness limits	& measuring position	
	Neck, at 65 mm from Top	0.40-0.70
	Side, at Max Diameter	Min. 0.38
	Top, at Centre Top	0.51-1.53

ROTARY BULB

Type: **G60**

GE.NO.: GEO167-1363

Issue date:

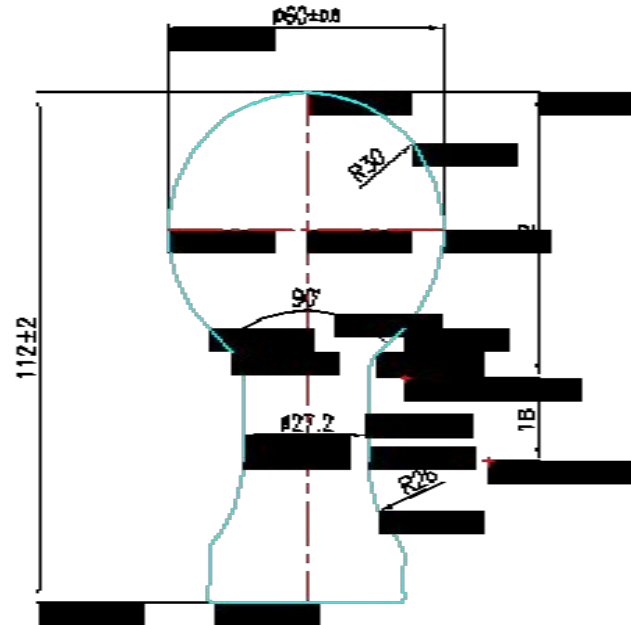

Neck	Outside Diameter	Max. 28
	Inside Diameter	Min. 24.8
	Oral	Max. 0.8
Flare	Outside Diameter	Max. 43.5
	Inside Diameter	Min. 32
Wall thickness limits	& measuring position	
	Neck, at 70 mm from Top	0.40-0.75
	Side, at Max Diameter	Min. 0.35


cc:31.2gram

ROTARY BULB

Type: **G60A**


GE.NO.: GED167-2286

Issue date:

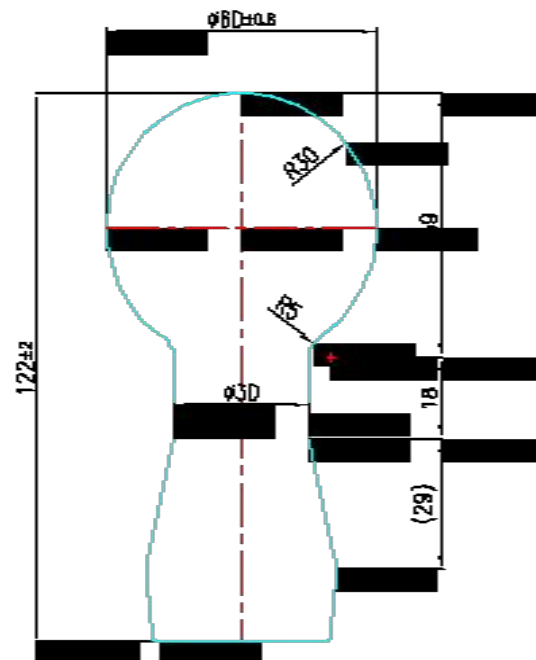

Neck	Outside Diameter	Max. 30.8
	Inside Diameter	Min. 27.6
	Oval	Max. 0.8
Flare	Outside Diameter	Max. 43.5
	Inside Diameter	Min. 32
Wall thickness limits & measuring position		
	Neck, at 7D mm from Top	0.4-0.75
	Side, at Max Diameter	Min. 0.35
	Top, at Centre Top	0.5-1.8

cc:32.1gram

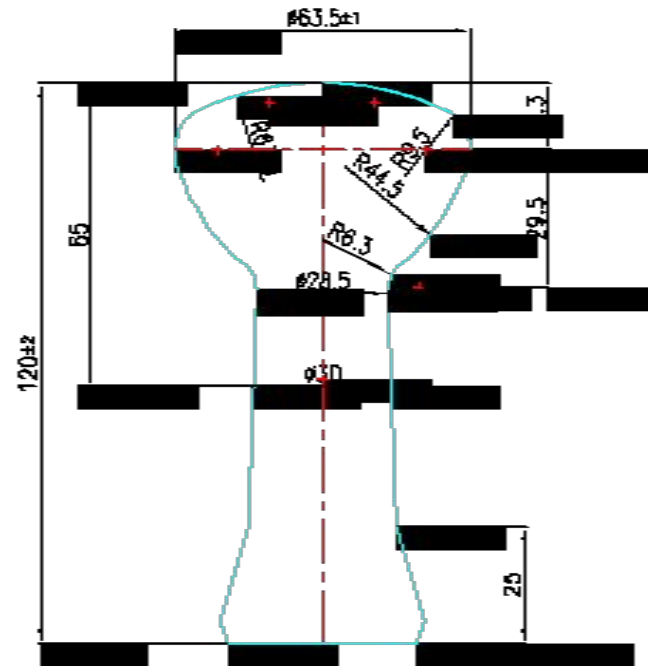

Neck	Outside Diameter	Max. 30.8
	Inside Diameter	Min. 26.1
	Oral	Max. 0.8
Flare	Outside Diameter	Max. 43.9
	Inside Diameter	Min. 34
Wall thickness limits & measuring position		
	Neck, at 76 mm from Top	0.40-0.75
	Side, at Max Diameter	Min. 0.35
	Top, at Centre Top	0.45-1.30