

Client vs server side rendering react

By Daniil Denisov


Terms

- Rendering
- SSR (Server-Side Rendering)
- CSR (Client-Side Rendering, рендеринг на клиенте)
- Hydratation
- Prerendering


Terms 2

- TTFB (Time to First Byte)
- FP (First Paint)
- FCP (First Contentful Paint)
- TTI (Time To Interactive)


Server-side rendering

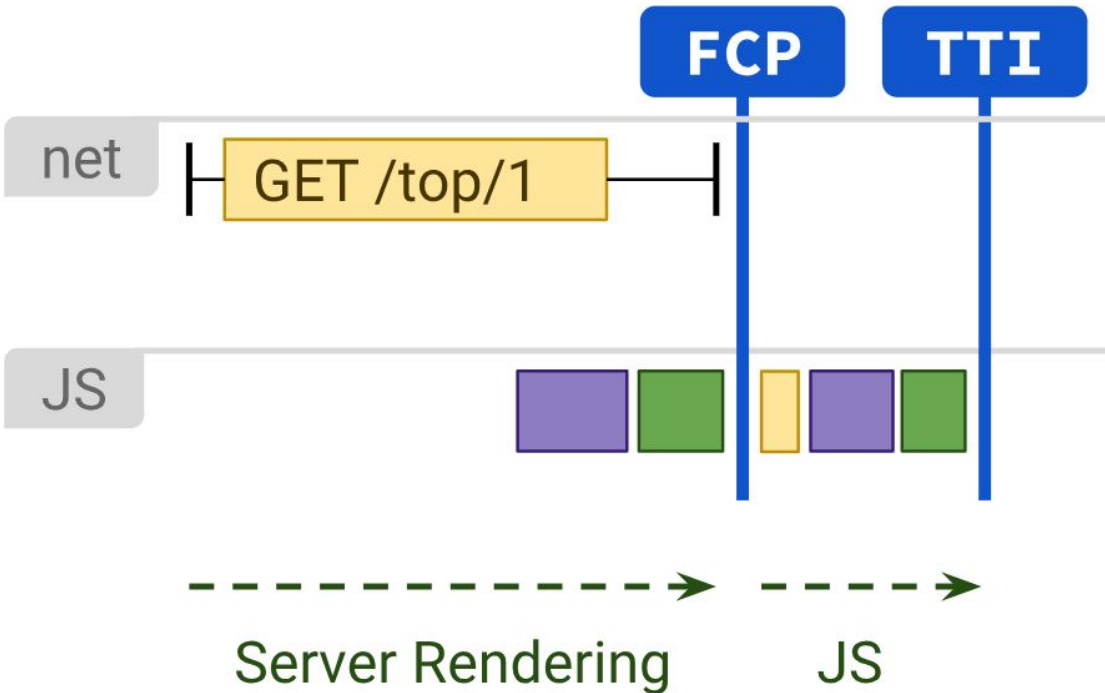

Client-side rendering

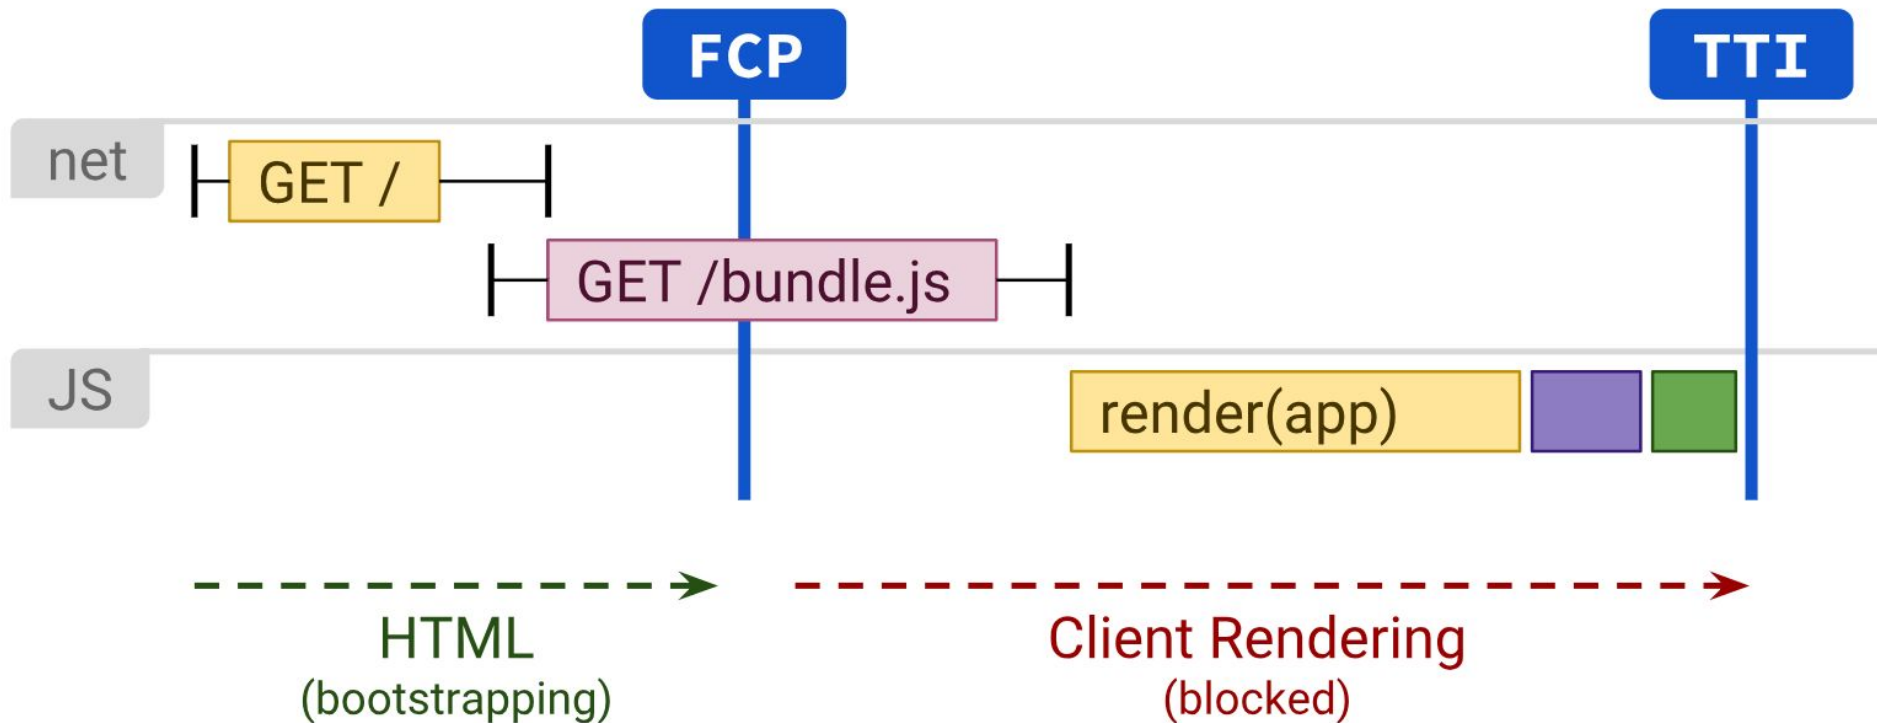

Combining SSR and CSR

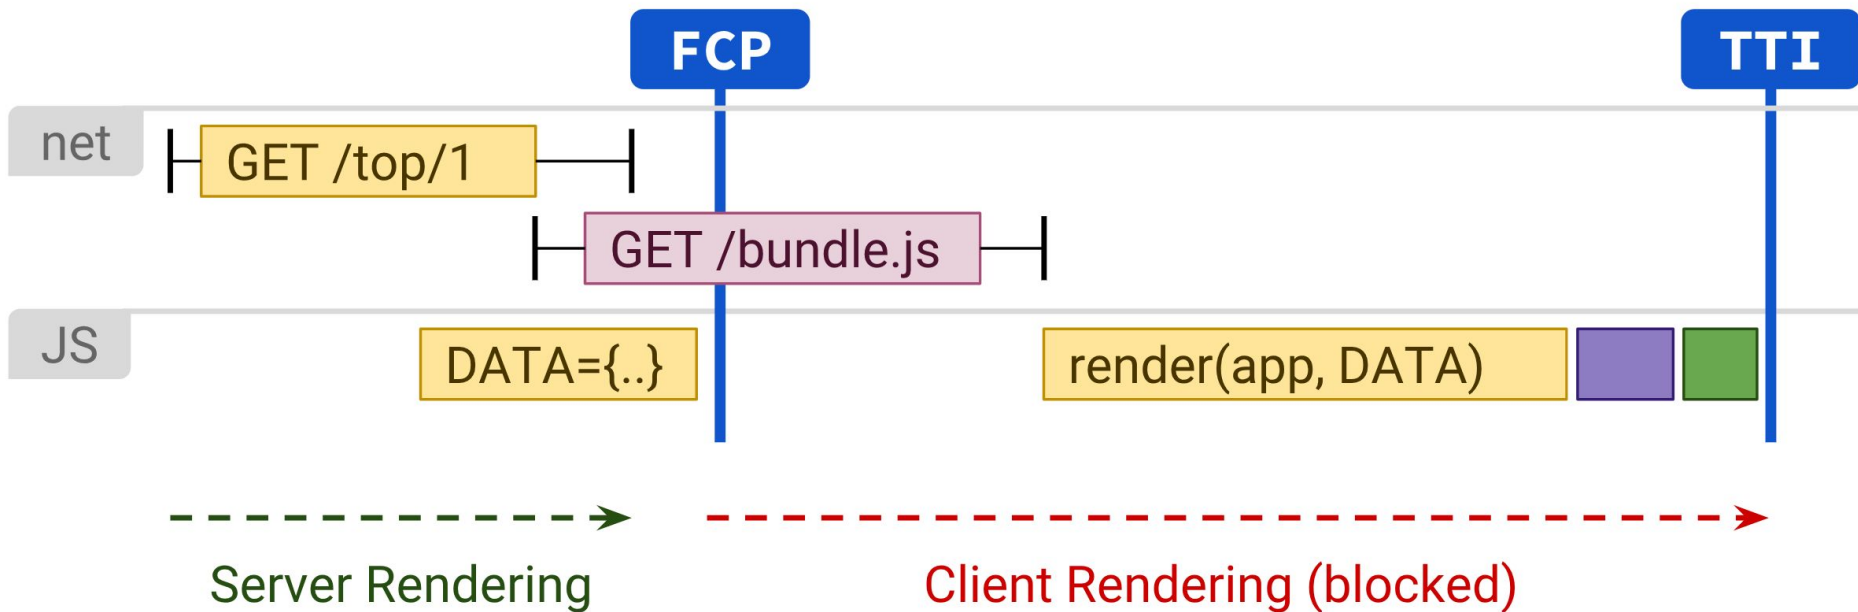



ReactDOMServer

- `renderToString()`
- `renderToStaticMarkup()`
- `renderToNodeStream()`
- `renderToStaticNodeStream()`

ReactDOMServer

- `renderToString()`
- `hydrate()`
- `renderToStaticMarkup()`
- `renderToNodeStream()`
- `renderToStaticNodeStream()`

ReactDOMServer

- `renderToString()`
- `hydrate()`
- `renderToStaticMarkup()`
- `renderToNodeStream()`
- `renderToStaticNodeStream()`

Which should I use?



QUESTIONS?
