

Human-Computer Interaction

Bizhanova Olga Ivanovna

Бижанова Ольга Ивановна

старший преподаватель кафедры программного обеспечения

Outline

Introduction What is

HCI?

Types of interfaces

Existing technologies

Advances in HCI

Architecture


Interaction design

User Experience

Tasks

Human

- •a person who tries to accomplish a goal
- •the end-user
- •the member of an organization

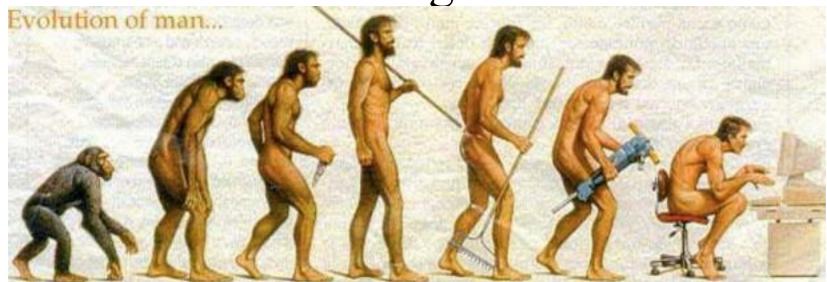

Computer

runs applications (software)



Computer

runs applications (software) locally versus



Interface

- •A point where two objects meet
- •A point where human can tell the computer what todo
- •A point where the computer displays the

requested information



Interaction

"dialogue" between humans and computers

What is HCI? Human

The interaction between ther(s) and application(s) is achieved trianan interface — user

interface



A process of information transfer •User to Machine

Machine to User

HCI is also referred to as Man Machine Interaction.

HCI is what the user sees and includes:

- The physical controls
- •What the system looks like?
- •How the system accepts input from the user?
- •How the system responds to user input?

Types of

A CLI displays a prompt, the user types a command on

A CLI displays a prompt, the user types a command on the keyboard, the command and provides textual Coulput.

Menu Driven Interface

The user has a list of items to choose from, and can make selections by highlighting one.

Graphical User Interface (GUI)

Uses windows, icons, menus and pointers (WIMP) which can be manipulated by a mouse (and often to an extent by a keyboard as well).

Natural Language Interface

Can range from simple command systems to voice activated text processing. Commands are spoken in "normal" language.

Command Line Interface

Advantages

- Very flexible with the use of "switches" (options)
- Good for "expert" users can quickly access commands
- Uses the fewest system resources

Disadvantages

- Requires the user to learn "complex" commands or
 - language
- "Hidden" features i.e. if the command is unknownwe
 - cannot make use of that feature
- Not very good for novice users

Command Line Interface


```
serminal
               🙆 🕯 💮 jmoeller@mediatest: -
              moeller@mediatest:-5 ps -elf
                                                                                 MI ADDR SZ
                                                                        [root@localhost -]# ping -q fa.wikipedia.org
                    root
                                                                       PING text.pntpa.wikimedia.org (208.80.152.2) 56(84) bytes of data.
                                                                       --- text.pntpa.wikimedia.org ping statistics ---
                                                                       I packets transmitted, I received, 0% packet loss, time Ons
                                                           2
                                                                      ertt min/avg/max/mdev = 548.528/548.528/548.528/0.000 ms
                                                                       [root@localhost -]# pwd
                                                           2
                   root
                                                                       [root@localhost -]# cd /var
                   root
                                                                       [root@localhost var]# ls -la
                                                                       drwxr-xr-x. 18 root root 4896 Jul 30 22:43 .
                                                                       drwxr-xr-x. 23 root root 4896 Sep 14 28:42 ...
                                                                       drwxr-xr-x. 2 root root 4096 May 14 00:15 account
                                                                        rwxr-xr-x, 11 root root 4096 Jul 31 22:26 cache
                                                                        rwxr-xr-x. 3 root root 4096 May 18 16:03 db
                                                                        rwxr-xr-x. 3 root root 4096 May 18 16:03 empty
                                                                        rwxr-xr-x, 2 root root 4896 May 18 16:03 games
                                                                        rwxrwx - T. 2 root gdm 4096 Jun 2 18:39 gdm
                                                                        rwxrwxrwx. 1 root root 11 May 14 88:12 lock -> ../run/lock
                                                                        rwxrwxrwx, 1 root root 10 Jul 30 22:43 mail -> spool/mail
                                                                        rwxr-xr-x. 2 root root 4096 May 18 16:03 opt
                                                                        rwxrwxrwx. 1 root root 6 May 14 88:12 run -> ../run
rwxr-xr-x. 14 root root 4896 May 18 16:83 speel
                                                                        (rwxrwxrwt. 4 root root 4096 Sep 12 23:50 rwxr-xr-x. 2 root root 4096 May 18 16:03 yp
                                                                        root@localhost var]# yum search wiki
                                                                        caded plugins: langpacks, presto, refresh-packagekit, remove-with-leaves
                                                                        pmfusion-free-updates
                                                                        pmfusion-free-updates/prinary db
                                                                        pmfusion-nonfree-updates
                                                                        pdates/metalink
                                                                                                                                                                  5.9 kB
                                                                         pdates
                                                                         pdstes/primary db
                                                                                                                                                                              66:15 ETA
```

Menu Driven Interface

Advantages

- No need to learn complex commands/language
- Easier for a novice tolearn/use
- Ideal when there are a limited number of options (efficient)
- Disadvantagestrating for experienced users i.e. the can command they want to use is buried 5 levels deep.
 - User interfacemaybe limited by screenspace and number of options available.

Menu Driven Interface

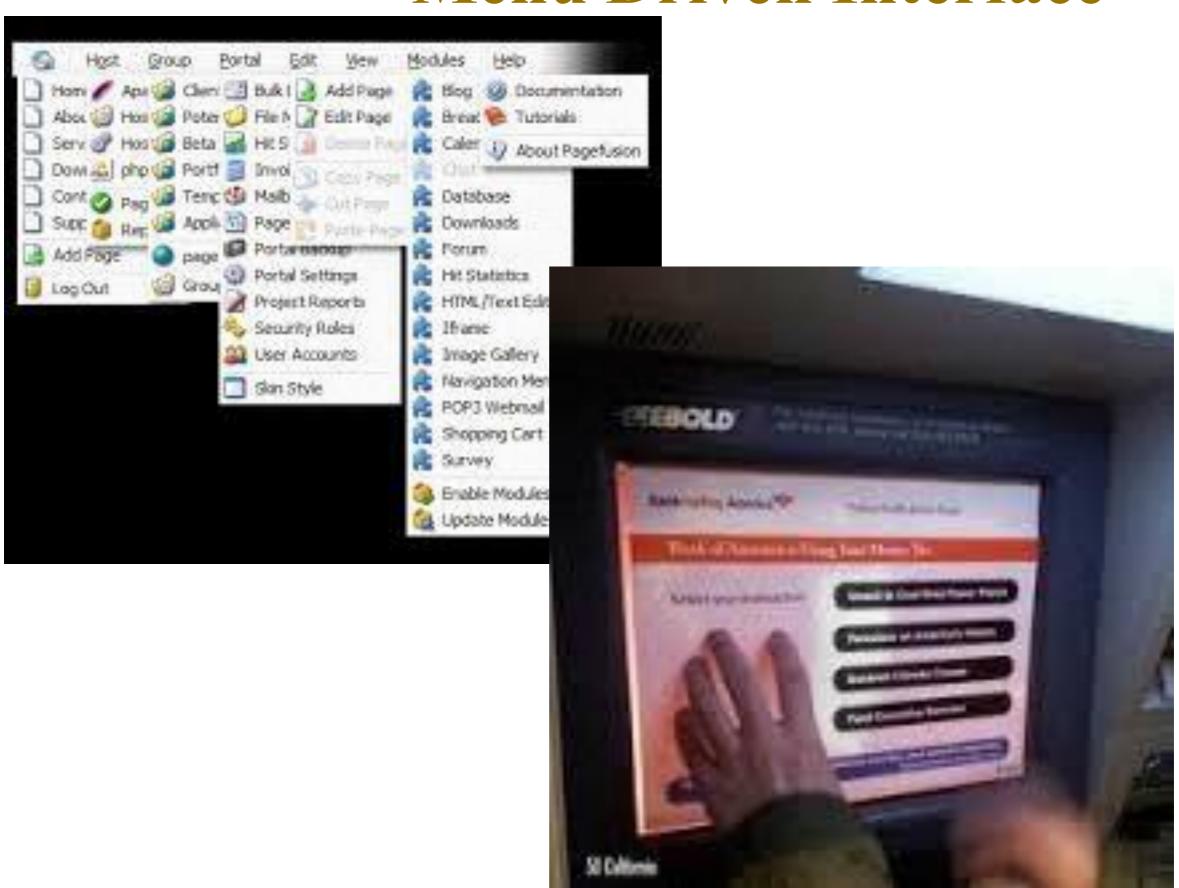

Graphical User Interface Advantages

Most suitable interface for inexperienced ornovice users

Many generic packages for a GUIwill share common features

Disadvantages

of interface of interface

Graphical User Interface




Natural Language Interface


Advantages

- No training required
- Can be quicker than keyboard entry
- Hands-free
- Can be used by the disabled
- Disadvantages
- Emerging technology still contains "bugs"
- Difficulty in dealing with homonyms
- Difficult torecognize all the different ways of

Natural Language Interface



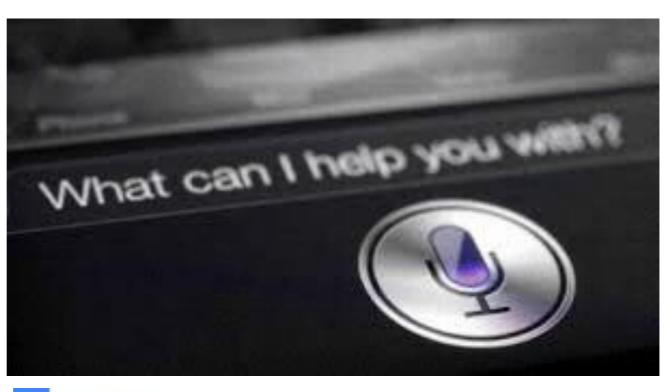

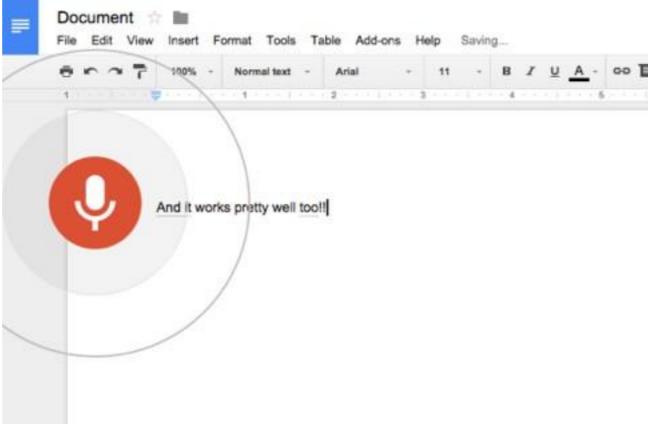

Architecture

- Architecture of any HCI systems is identified Number of inputs and outputs inthe system
 - Diversity of inputs and outputs interms of modality
 - Workings of these diverse input and output for interaction purpose

- Basedon different configuration and design of interface, HCI systems can be divided into:
- Unimodal HCI system

Unimodal HCI System

•An interface mainly relies on number and diversity of its inputs and outputs which are communication channels that enable users to interact with computer via this interface.

A system that is based on only one modality is called *unimodal*.

Based on the nature of different modalities, they can be divided into three categories:

Audio Based HCI

- •It deals with information acquired by
- The informationd gathered auditorni gatals of signals can be more trustable, helpful and in some cases unique providers information.
- Key components:
 - Microphone

speech recognition) and NLU (natural

- ASR (guagenatederstanding) software
 - The main research areas of Audio based HCI are divided into:
 - Speech Recognition
 - Speaker Recognition
 - Auditory Emotion Analysis

Sensor Based HCI

- It has the wide range of applications in our day-to-day life.
- The common feature in every application is that at least one physical sensor is used between machine and human to provide interaction.
- Some of the sensors range from being to primitive :
 - Pen-Based Interaction
 - Motion Tracking Sensors/Digitizers
 - Haptic Sensors
 - Pressure Sensors



Visual Based HCI

- It is also called as machine vision which is the observation of an environment using cameras.
- In this, different aspects of human responses can be recognised visual signals.
- Detection, identification and tracking of a real life entity and its translation into meaningful machine/computer input.
- The main research areas of visual based HCI are:
- Facial Expression Analysis
- Body Movement tracking and Gesture recognition
- Gaze Detection


Multimodal HCI System

• Combination of multiple modalities, or usage of more than one independent channel signals for the interaction between a user and a machine is termed as multimodal human computer interaction system (MMHCI).


• A multimodal interface acts as a facilitator of human-computer interaction via two or more modes of input.

• It is easy to use by disabled, illiterate people.

Multimodal HCI System

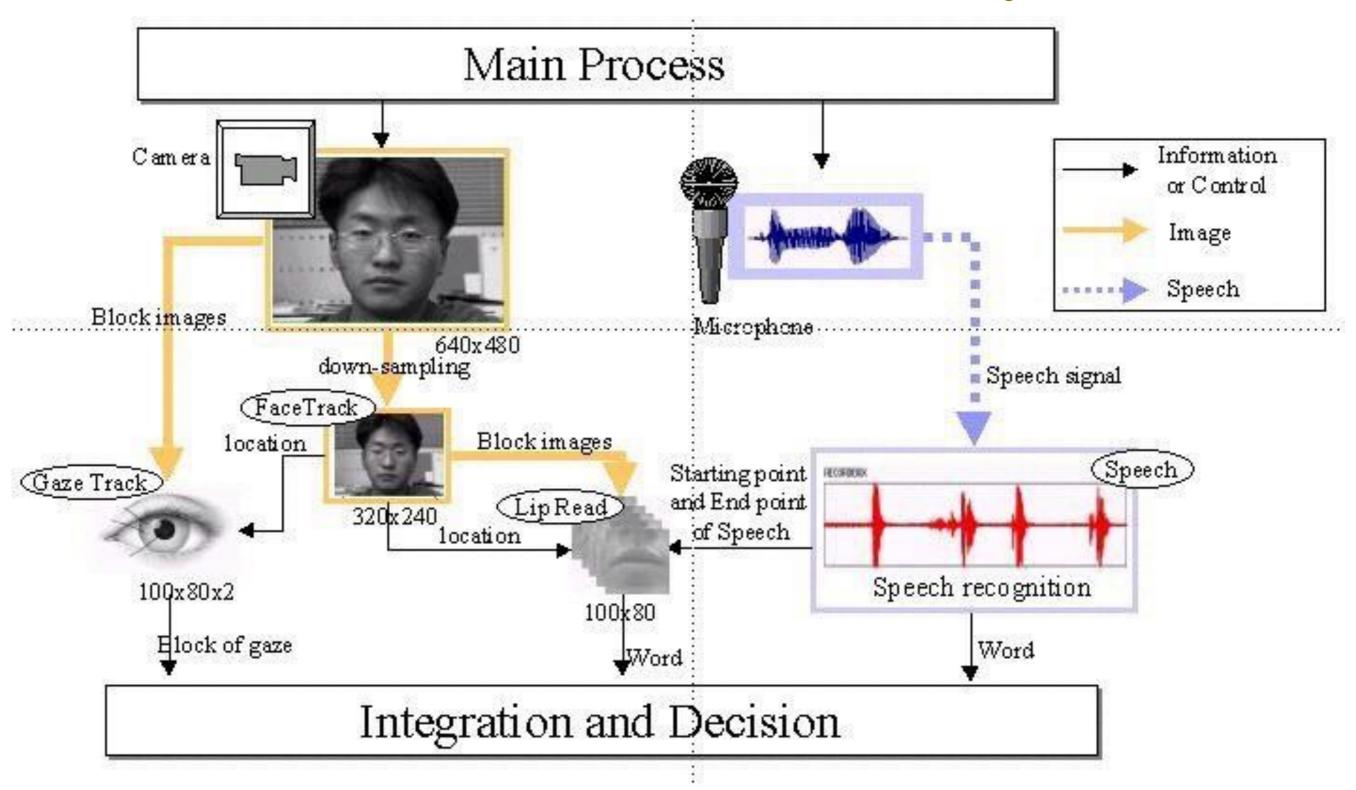

HCI: process

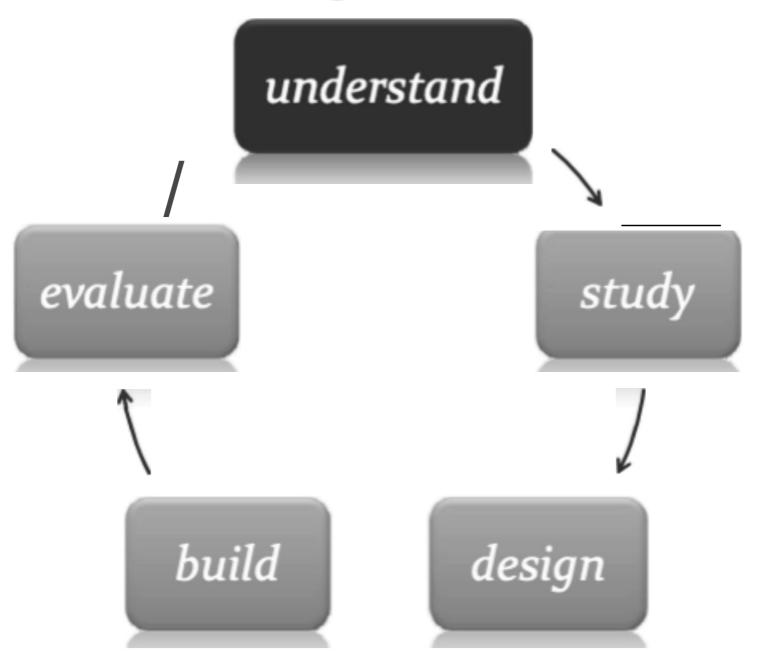






Interaction design

"Designing interactive products to support the waypeople communicate and interact in their everyday and working lives."

Sharp, Rogers & Preece, 2007

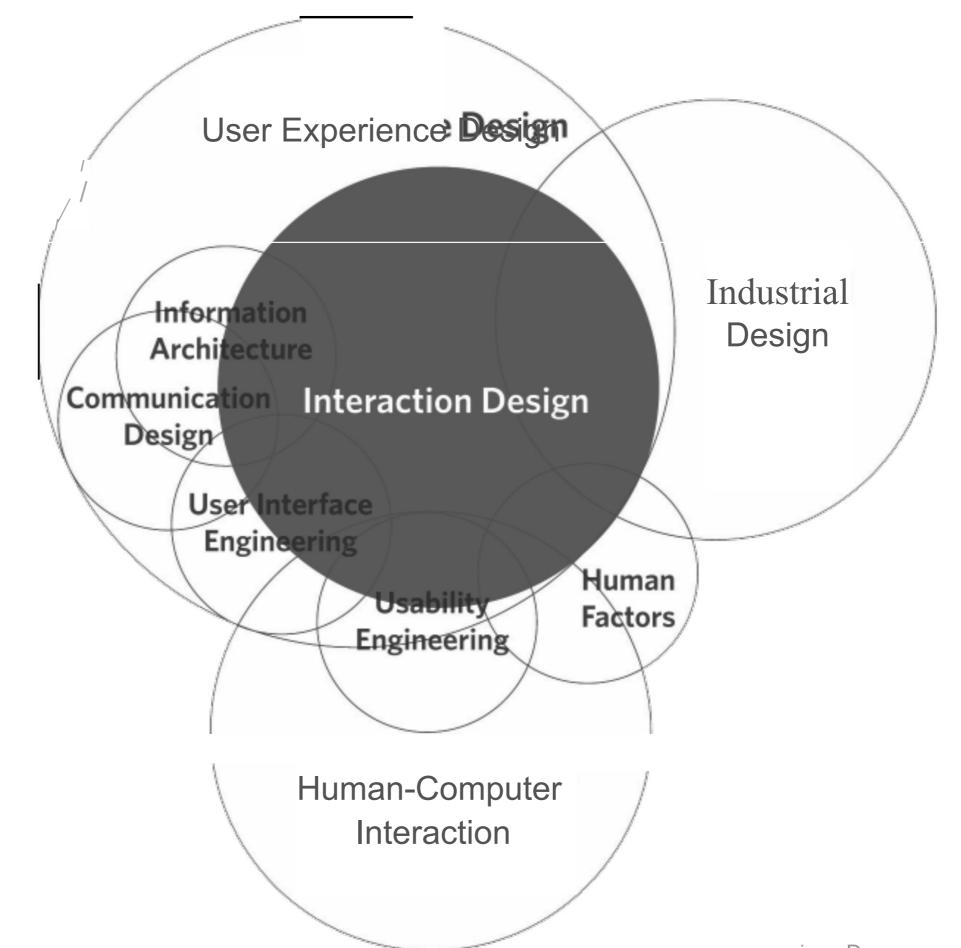

img: Dan Saffer **Cognitive Psychology**

Computer Science

Neuroscience

Artificial Intelligence

Linguistics

Philosophy

Sociology

Ergonomics (Human Factors)

Engineering

Design

Anthropology

User Experience UX

User experience is the totality of the effect or effects felt by a user as a result of interaction with, and the usage context of, a system, device, or product, including the institutes of anability motional impact during interaction, and savoring the memory after interaction.

Usability

is the pragmatic component of user experience, including effectiveness, efficiency, productivity, ease-of-use, learnability, retainability, and the pragmatic aspects of user satisfaction.

Usefulness


Usefulness is the component of the UX to which system functionally gives the ability to use the system or product to accomplish the goals of work (or play).

Functionality

Functionality is power to do work (to play) seated in the non-user-interface computational features and capabilities.

Emotional Impact

Emotional impact is the affective component of UX that influences user feelings. Emotional impact includes such effects as pleasure, fun, joy of use, aesthetics, desirability, pleasure, novelty, originality, sensations, coolness, engagement, appeal and can involve deeper emotional factors such self-identity, a facting of contribution to the world and pride of

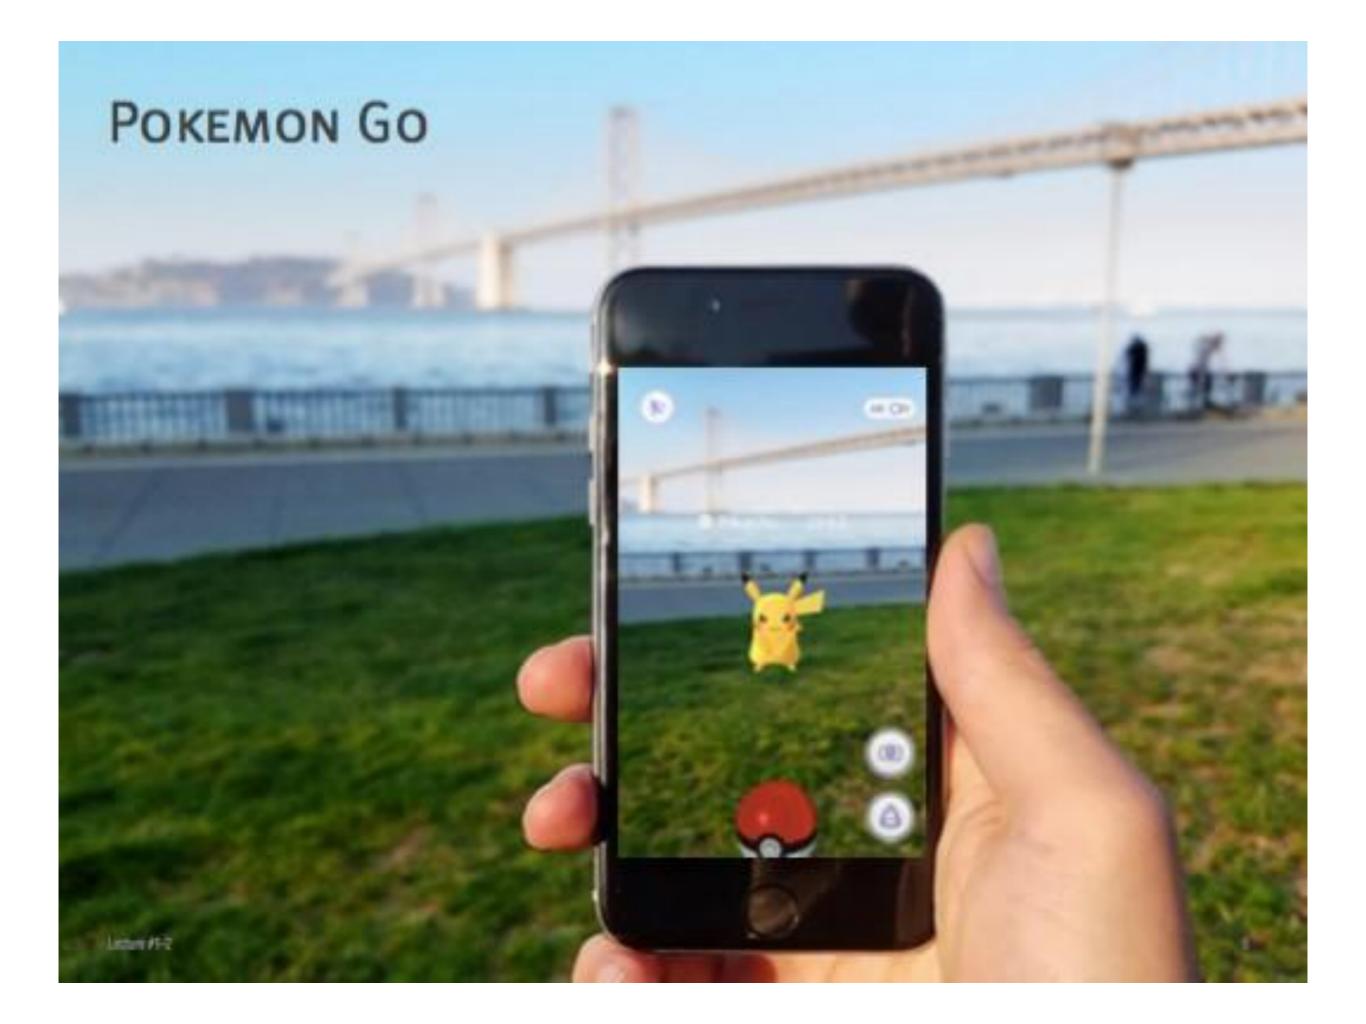


remember


"The applications that are easy to use are designed to be familiar."

Jenifer Tidwell

remember

Keep the i p e 1 **Ple**...tle e most engaging in erface of a game?

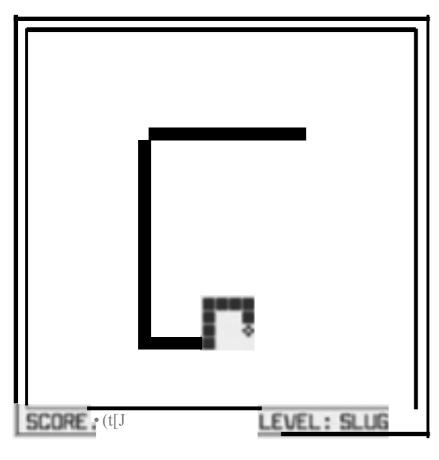

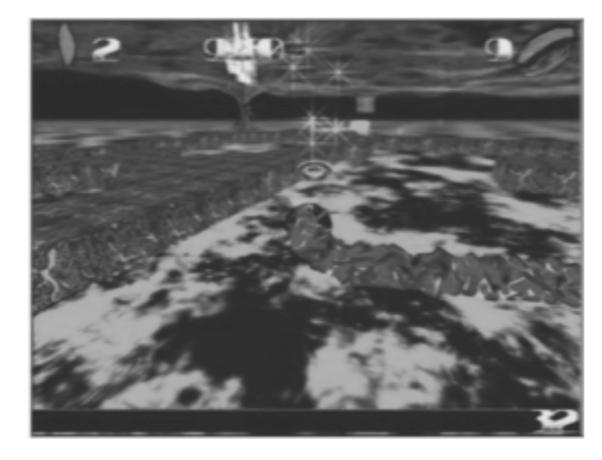

Make Blog

Upload personal statement

Upload Your Images

Make a personal blog

- Wordpress
- •Tumblr
- •Blogger
- •Medium

Your Blog Post #1

- •Lenght: 1000 words or less
- •Who I am, and what I have been through
- •What I like to learn
- •Things that I like

Your Blog Post #2

- Upload images of yourself or about yourself
- Pick your 3 favorites
- •Tell us why the pic is your favorite